


**SAMSUNG**

# COLOR TELEVISION RECEIVER

Chassis : K57A(N)  
Model : CL25M6WKX/XAX CL25M6WKX/XAP  
CL21M6WKX/STR CL21M6WKX/XAP  
CL21M6WKX/XAO CL21M6WKX/RCL

# ***SERVICE*** *Manual*

## COLOR TELEVISION RECEIVER

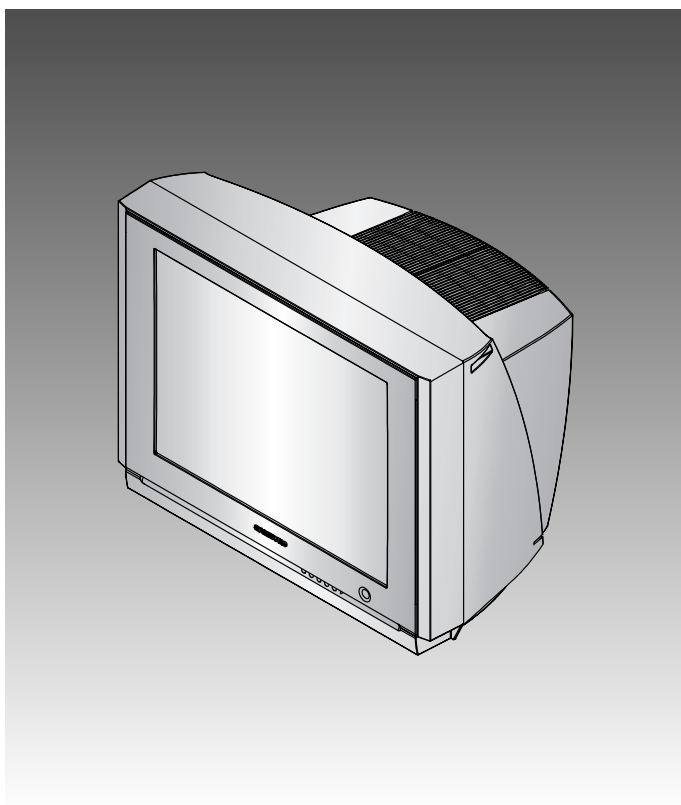

## CONTENTS

1. Precautions
2. Specifications and IC Data
3. Disassembly and Reassembly
4. Alignment and Adjustment
5. Troubleshooting
6. Exploded View and Parts List
7. Electrical Parts List
8. Block Diagram
9. Wiring Diagram
10. Schematic Diagrams



# 1. Precautions

Follow these safety, servicing and ESD precautions to prevent damage and protect against potential hazards such as electrical shock and X-rays.

## 1-1 Safety Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.
2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including: nonmetallic control knobs and compartment covers.
3. Make sure that there are no cabinet openings through which people—particularly children—might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (Figure 1-1):  
Warning: Do not use an isolation transformer during this test. Use a leakage-current tester or a metering system that complies with American National Standards Institute (ANIS C101.1, Leakage Current for Appliances), and Underwriters Laboratories (UL Publication UL1410, 59.7).
5. With the unit completely reassembled, plug the AC line cord directly into the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including: antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.

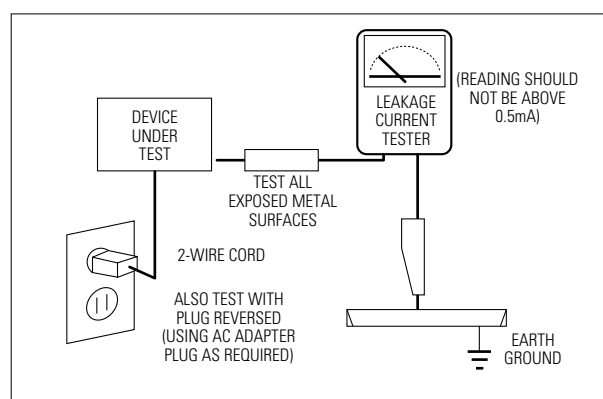




Fig. 1-1 AC Leakage Test

6. Antenna Cold Check:  
With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.
7. X-ray Limits:  
The picture tube is especially designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original. Carefully reinstall the picture tube shields and mounting hardware; these also provide X-ray protection.
8. High Voltage Limits:  
High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits. Correct operation of the X-ray protection circuits must be reconfirmed whenever they are serviced.  
(X-ray protection circuits also may be called "horizontal disable" or "hold-down".)

Heed the high voltage limits. These include the X-ray Protection Specifications Label, and the Product Safety and X-ray Warning Note on the service data schematic.

## 1-1 Safety Precautions (Continued)

---

9. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.
10. Design Alteration Warning:  
Never alter or add to the mechanical or electrical design of this unit. Example: Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.
11. Hot Chassis Warning:  
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.  
  
To confirm that the AC power plug is inserted correctly, do the following: Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.
12. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, regardless of the AC plug polarity. These units can be safely serviced only if an isolation transformer inserted between the receiver and the power source.
13. Some TV chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulating material that must not be defeated or altered.
14. Components, parts and wiring that appear to have overheated or that are otherwise damaged should be replaced with parts that meet the original specifications. Always determine the cause of damage or overheating, and correct any potential hazards.
15. Observe the original lead dress, especially near the following areas: Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.
16. Picture Tube Implosion Warning:  
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.
17. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.
18. Product Safety Notice:  
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.  
  
Components that are critical for safety are indicated in the circuit diagram by shading, () or ().  
Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications. A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.

## 1-2 Servicing Precautions

---

Warning1: First read the "Safety Precautions" section of this manual. If some unforeseen circumstance creates a conflict between the servicing and safety precautions, always follow the safety precautions.

Warning2: An electrolytic capacitor installed with the wrong polarity might explode.

1. Servicing precautions are printed on the cabinet. Follow them.
2. Always unplug the unit's AC power cord from the AC power source before attempting to: (a) Remove or reinstall any component or assembly, (b) Disconnect an electrical plug or connector, (c) Connect a test component in parallel with an electrolytic capacitor.
3. Some components are raised above the printed circuit board for safety. An insulation tube or tape is sometimes used. The internal wiring is sometimes clamped to prevent contact with thermally hot components. Reinstall all such elements to their original position.
4. After servicing, always check that the screws, components and wiring have been correctly reinstalled. Make sure that the portion around the serviced part has not been damaged.
5. Check the insulation between the blades of the AC plug and accessible conductive parts (examples: metal panels, input terminals and earphone jacks).
6. Insulation Checking Procedure: Disconnect the power cord from the AC source and turn the power switch ON. Connect an insulation resistance meter (500V) to the blades of the AC plug.  
  
The insulation resistance between each blade of the AC plug and accessible conductive parts (see above) should be greater than 1 megohm.
7. Never defeat any of the B+ voltage interlocks. Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
8. Always connect a test instrument's ground lead to the instrument chassis ground before connecting the positive lead; always remove the instrument's ground lead last.

### 1-3 Precautions for Electrostatically Sensitive Devices (ESDs)

---

1. Some semiconductor ("solid state") devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
2. Immediately before handling any semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging wrist-strap device. (Be sure to remove it prior to applying power—this is an electric shock precaution.)
3. After removing an ESD-equipped assembly, place it on a conductive surface such as aluminum foil to prevent accumulation of electrostatic charge.
4. Do not use freon-propelled chemicals. These can generate electrical charges that damage ESDs.
5. Use only a grounded-tip soldering iron when soldering or unsoldering ESDs.
6. Use only an anti-static solder removal device. Many solder removal devices are not rated as "anti-static"; these can accumulate sufficient electrical charge to damage ESDs.
7. Do not remove a replacement ESD from its protective package until you are ready to install it. Most replacement ESDs are packaged with leads that are electrically shorted together by conductive foam, aluminum foil or other conductive materials.
8. Immediately before removing the protective material from the leads of a replacement ESD, touch the protective material to the chassis or circuit assembly into which the device will be installed.
9. Minimize body motions when handling unpackaged replacement ESDs. Motions such as brushing clothes together, or lifting a foot from a carpeted floor can generate enough static electricity to damage an ESD.

#### **CAUTION**

These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

## 2. Specifications and IC Data

### 2-1 Specifications

Television System:

MODEL	SYSTEM
TXM2792FX	NTSC ONLY

Channels:

System Band	NTSC
VHF	2 - 13
UHF	14 - 69
CABLE	1 - 125

Intermediate Frequencies (MHz) :

SYSTEM IF Carrier Frequency	NTSC
Picture IF Carrier	45.75
Sound IF Carrier	41.25
Color Sub Carrier	42.18

Picture Tube:

29 Inch    A68QCP891X100	29Inch    Flat, +380MG
--------------------------	------------------------

Power Requirements:

AC 120V, 60Hz

Antenna Input Impedance:

VHF, UHF : Telescopic dipole antenna (75 ohm unbalanced type )

Speaker Impedance

8 ohm, 15W+15W (Dual Type)

## 2-2 IC Line Up

---

Table 2-1 IC Line-Up			
Loc. No	Specification	Description	Remark
IC201S	SPM-464A	TDA9592 PS/NI, SPM-464A,64P	Philips
IC301	LA7845	VERTICAL OUTPUT	Sanyo
IC501	TDA6108QJF	RGB DRIVE AMP	Philips
IC602	TDA7297	SOUND-AMP (15W x 2CH)	Philips
IC801S	KA5Q1265R	POWER IC (STR)	FIAIR CHILD
IC802	KA7632	CUSTOM REGULATOR (5V, 8V, 3.3V)	FIAIR CHILD
IC202	M24C08	EEPROM	
PC801S PC802S	TCET1108 / LTV817B	PHOTO COUPLER	
IC101	LA7510	IF DETECTOR-IC	TEMIC
IC601	MSP-3425G-B8	Sound Processor	Micronas
ICP01	VIPER12AD1P	PWM CONTROCCER-IC	
ICW01	NJM2235D	VIDEO Switching-IC	
ICG01	4558	OP AMP-IC	



## 2-3 Semiconductor Base Diagrams

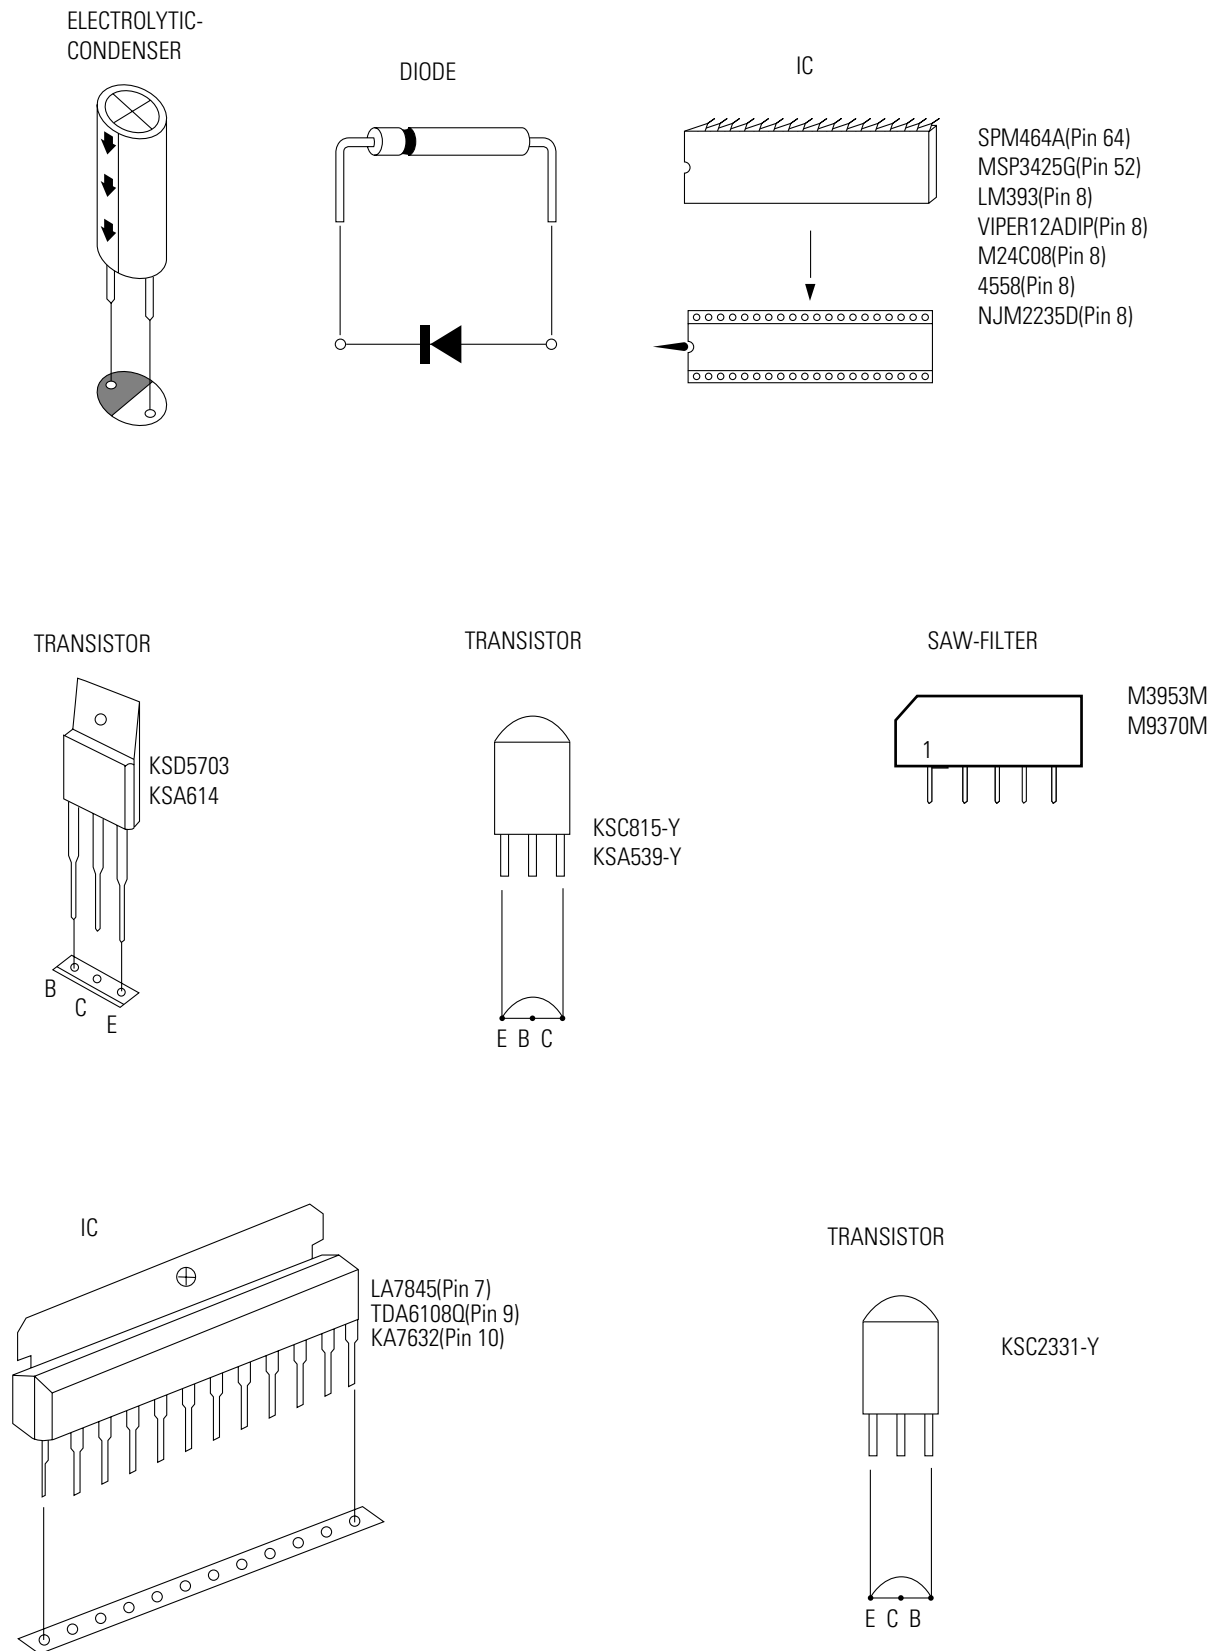


Fig. 2-1 Semiconductor Base Diagrams

# MEMO


---

## 3. Disassembly and Reassembly

---

### 3-1 Back Cover Removal



---

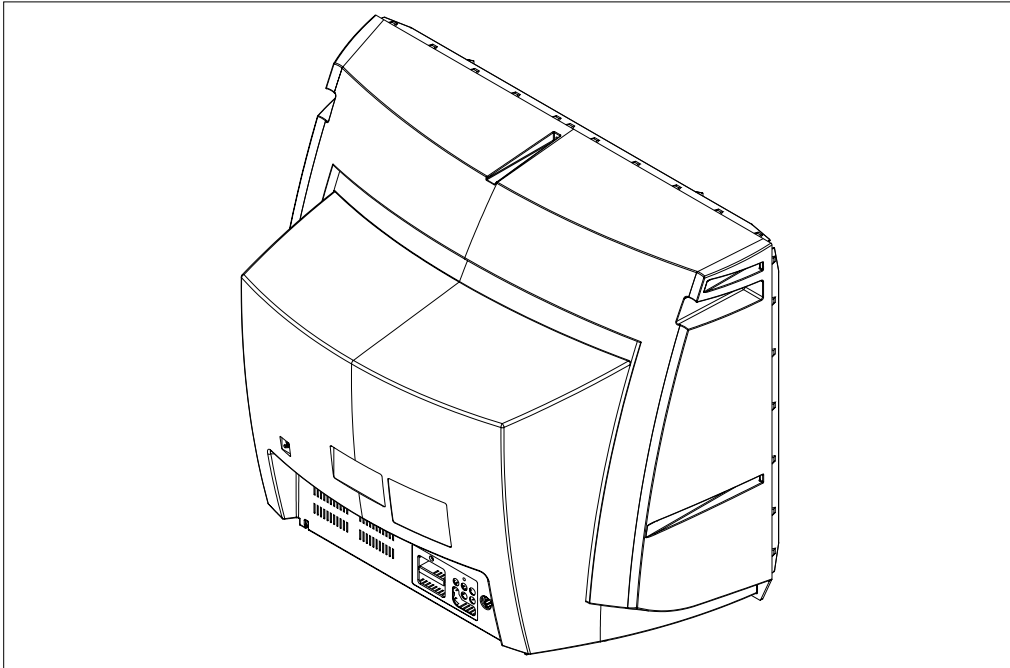

1. After removing the screws, press the tension rib and pull the cabinet backwards.
2. To reassemble, press the tension rib (see diagram).

### 3-2 Main Board Removal

---

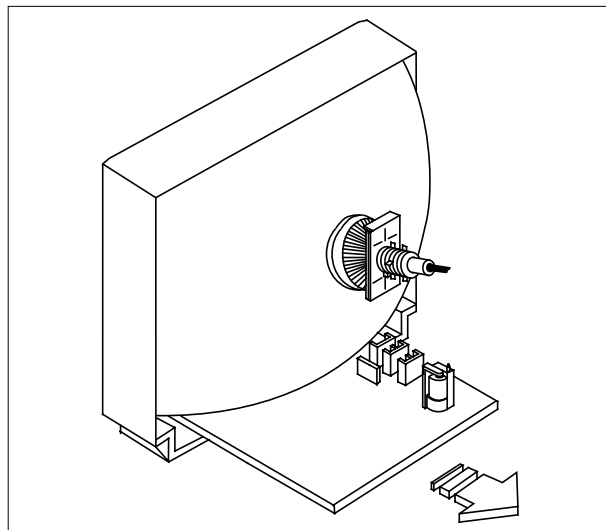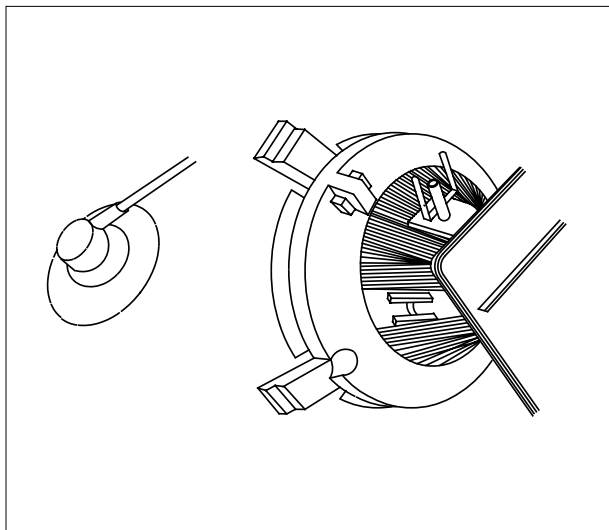


1. Separate the socket board from the CRT neck.
2. Remove the Anode Cap from the CRT.
3. Remove the main board by pulling it with both hands.

Warning: The FBT is charged with high voltage.  
Before removing the Anode Cap, discharge the voltage  
through one of the heat sinks on the main board.

### 3-3 Speaker Removal


---

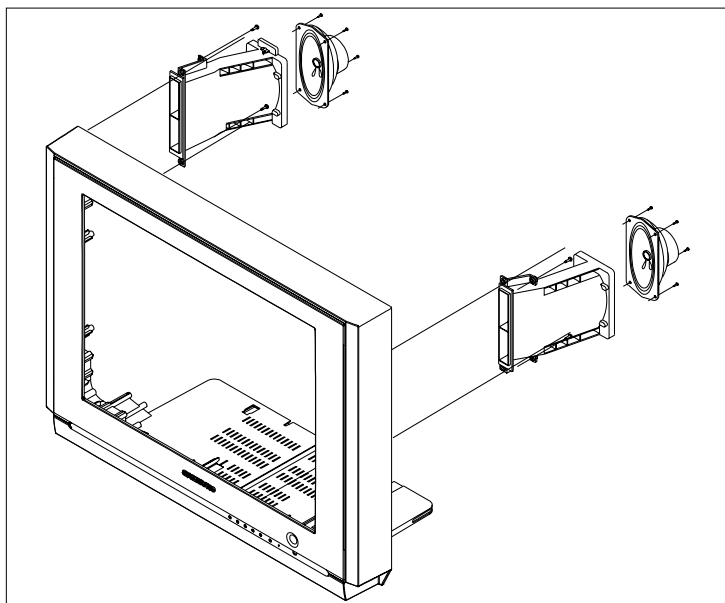

1. Remove the speaker by pressing the tension rib.

### 3-4 CRT Removal

---

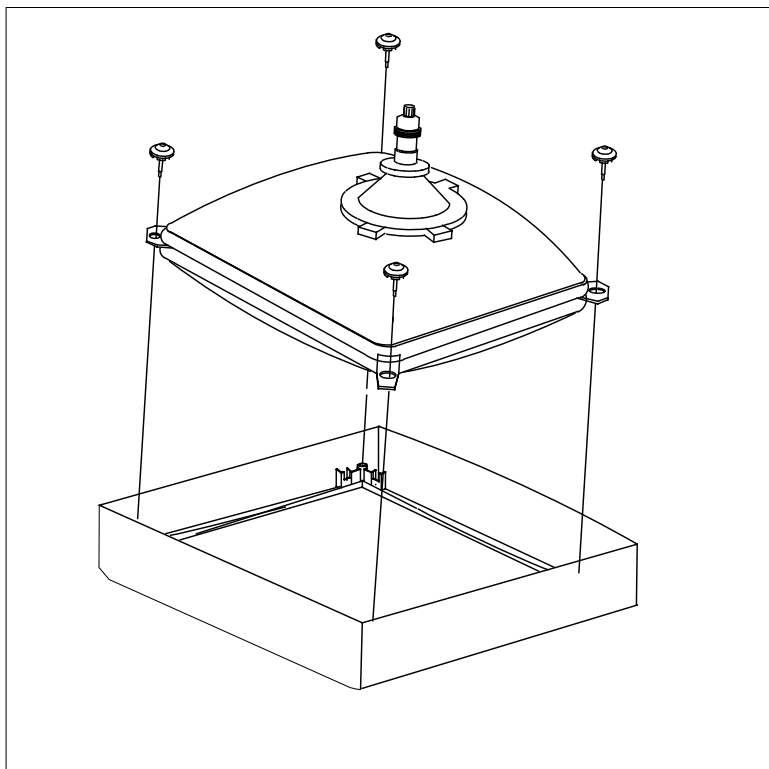

1. Spread a soft mat on the floor. Place the TV set face down.
2. Remove the 4 nuts mounting the CRT to the front cabinet. Lift the CRT.
3. Caution: Because of the high vacuum and large surface area of the picture tube, be careful while handling it: (1) Always lift the picture tube by grasping it firmly around the faceplate, (2) Never lift the tube by its neck. (3) Do not scratch the picture tube or apply excessive pressure. Fractures of the glass may cause an implosion.

# MEMO

## 4. Alignment and Adjustments

### 4-1 Preadjustment

#### 4-1-1 Factory Mode

1. Do not attempt these adjustments in the Video Mode.
2. The Factory Mode adjustments are necessary when either the EEPROM (IC202) or the CRT is replaced.
3. Do not tamper with the “Adjustment” screen of the Factory Mode menu. This screen is intended only for factory use.

#### 4-1-2 When EEPROM (IC202) Is Replaced

1. When IC202 is replaced all adjustment data revert to initial values. It is necessary to re-program this data.
2. After IC202 is replaced, warm up the TV for 10 seconds.

#### 4-1-3 When CRT Is Replaced

1. Make the following adjustments AFTER setting up after setting up purity and convergence :

White Balance  
Sub-Brightness  
Vertical Center  
Vertical Size  
Horizontal Size  
Fail Safe (This adjustment must be the last step).

2. If the EEPROM or CRT is replaced and set SC as 30(factory mode).

## 4-2 Factory/Service Mode

### 4-2-1 Procedure for the “Adjustment” Mode

1. This mode uses the standard remote control. The Service Mode is activated by entering the following remote-control sequence :
  - (1) DISPLAY → FACTORY.
  - (2) STAND-BY → MUTE → 1 → 8 → 2 → POWER ON.
2. The “SERVICE (FACTORY)” message will be displayed. The Service Mode has four components: ADJUST, OPTION , G2-ADJUST and RESET.
3. Access the Adjustment Mode by pressing the “VOLUME” keys ( Up or Down). The adjustment parameters are listed in the accompanying table, and selected by pressing the CHANNEL keys (▲, ▼).
4. Selection sequences for the all system:  
DOWN or UP key:  
SCT>SBT>BLR>BLB>RG>GG>BG>VSL>VS>VA>HS>SC>CDL>STT>AKB>NDL>NSR>SCBT>VOL>CAP>MVOL>RP00>RP01>AGCS>OMD>SCL>PWL>MUS>AGC>HPAR>HBOW>EWID>EPAR>EUCN>ELCN>ETRP>VZ>SVM>VMA>SSP>PSNS>DNSR>DSBT>DCDL>DBLR>DBLB>DSK
5. The VOLUME keys increase or decrease the adjustment values (stored in the non-volatile memory) when Adjustment Mode is cancelled.
6. Cancel the Adjustment Mode by re-pressing the “FACTORY” or “Power OFF” keys.

**4-2-2 Main Adjustment Parameter**

NO	OSD	FUNCTION	RANGE	INITIAL DATA	SELECTION	REMARK
1	SCT	Sub Contrast	0 ~ 23	13		ADJ
2	SBT	Sub Brightness	0 ~ 23	9		ADJ
3	BLR	Black Level offset R	0 ~ 63	32		ADJ
4	BLB	Black Level offset B	0 ~ 63	32		ADJ
5	RG	Red Gain	0 ~ 63	28		ADJ
6	GG	Green Gain	0 ~ 63	25		FIX
7	BG	Blue Gain	0 ~ 63	31		ADJ
8	VSL	Vertical Slope	0 ~ 63	27		ADJ
9	VS	Vertical Shift	0 ~ 63	31		FIX
10	VA	Vertical Amplitude	0 ~ 63	32		ADJ
11	HS	Horizontal Shift	0 ~ 63	30		ADJ
12	SC	S-Correction	0 ~ 63	29		FIX
13	CDL	Cathode Drive Level	0 ~ 15	11		FIX
14	STT	Sub Tint	0 ~ 7	5		FIX
15	AKB	AKB On / off	0 ~ 1	0		FIX
16	NDL	NTSC Delay	0 ~ 15	1		FIX
17	NSR	NTSC Sub color	0 ~ 23	5		FIX
18	SCBT	Screen Brightness	0 ~ 63	36		FIX
19	VOL	Volume pre setting	0 ~ 63	10		FIX
20	CAP	Caption Position	0 ~ 15	12		FIX
21	MVOL	Melody Volume	0 ~ 50	7		FIX
22	RP00	Ratio Pre / overshoot	0 ~ 1	1		FIX
23	RP01	Ratio Pre / overshoot	0 ~ 1	1		FIX
24	AGCS	IF AGC Speed	0 ~ 3	1		FIX
25	OMD	Offset IF Demodulator	0 ~ 63	15		FIX
26	SCL	Soft Clipping Level	0 ~ 3	3		FIX
27	PWL	Peak White Limiting	0 ~ 15	15		FIX
28	MUS	Color Matrix	0 ~ 1	1		FIX
29	AGC	Automatic Gain Control	0 ~ 63	33		FIX
30	HPAR	Horizontal Parallelogram	0 ~ 63	32		ADJ
31	HBOW	Horizontal Bow	0 ~ 63	32		ADJ
32	EWID	EW Width	0 ~ 63	32		ADJ



NO	OSD	FUNCTION	RANGE	INITIAL DATA	SELECTION	REMARK
33	EPAR	EW Parabola	0 ~ 63	32		ADJ
34	EUCN	EW Upper Coner	0 ~ 63	12		ADJ
35	ELCN	EW Lower Coner	0 ~ 63	12		ADJ
36	ETRP	EW Trapezium	0 ~ 63	12		ADJ
37	VZ	Vertical Zoom	0 ~ 63	48		FIX
38	SVM	Delay of RGB to VM Output	0 ~ 3	0		FIX
39	VMA	Amplitude of SVM Output	0 ~ 3	3		FIX
40	SSP	Sub Sharpness	0 ~ 20	5		FIX
41	PSNS	Identification sens	0 ~ 1	1		FIX
42	DNSR	NSR in DVD mode	0 ~ 23	5		FIX
43	DSBT	SBT in DVD mode	0 ~ 23	4		FIX
44	DCDL	CDL in DVD mode	0 ~ 16	10		FIX
45	DBLR	BLR in DVD mode	0 ~ 63	32		FIX
46	DBLB	BLB in DVD mode	0 ~ 63	32		FIX
47	DSK	Dynamic Skin Tone Control	0 ~ 1	0		FIX

### 4-2-3 Option Bytes

In the Service Mode, various can be selected via the Option Table. Example:

Option Table : xx xx

	OSD	SETTING	REMARK
1	SYSTEM	CT-N EN/SP/FR	- Language
2	VIDEO MUTE	OFF	- Video Mute On/Off changing the channel
3	ZOOM	NOR/ZOOM	- Picture Size Option
4	AUTO POWER	OFF	- Master S/w Option
5	AUDIO MUTE	ON	- Audio Mute On/ Off without signal
6	START LANG.	ENGLISH	- Inital Language agter Factory Reset
7	HOTEL MODE	OFF	- Hotel mode On/ Off
8	BULE SCREEN	OFF	- Bule Screen On/ Off without signal
9	V-CHIP	ON	- V-CHIP ON/OFF (U.S.A)
10	AV OPTION	AV1/AV2/S-V/DVD	- AV + S-V + DVD
11	TILT	ON	- TILT ON/OFF
12	DEMO	OFF	- DEMO ON/OFF
13	EXT COMB	OFF	- External 2H-COM ON/OFF
14	V-Guard	ON	- Vertical Guard ON/OFF (*MAIN PCB A LOT : OFF)

## 4-2-4 RESET

The Reset Mode is used during factory inspection.  
Function Reset:

- |                 |         |
|-----------------|---------|
| 1. Picture Mode | Dynamic |
| 2. Sound Mode   | Custom  |
| 3. Auto Volume  | Off     |
| 4. Melody       | On      |
| 5. Surround     | Off     |
| 6. Turbo Sound  | Off     |
| 7. MTS          | Stereo  |
| 8. Language     | English |
| 9. Caption      | Off     |
| 10. Timer       | Off     |

## 4-3 Other Adjustments

---

### 4-3-1 General

1. Usually, a color TV needs only slight touch-up adjustment upon installation. Check the basic characteristics such as height, horizontal and vertical sync and focus.
2. The picture should have good black and white details. There should be no objectionable color shading; if color shading is present, perform the purity and convergence adjustments described below.
3. Use the specified test equipment or its equivalent.
4. Correct impedance matching is essential.
5. Avoid overload. Excessive signal from a sweep generator might overload the front-end of the TV. When inserting signal markers, do not allow the marker generator to distort test results.
6. Connect the TV only to an AC power source with voltage and frequency as specified on the backcover nameplate.
7. Do not attempt to connect or disconnect any wires while the TV is turned on. Make sure that the power cord is disconnected before replacing any parts.
8. To protect against shock hazard, use an isolation transformer.

### 4-3-2 Automatic Degaussing

A degaussing coil is mounted around the picture tube, so that external degaussing after moving the TV should be unnecessary. But the receiver must be properly degaussed upon installation.

The degaussing coil operates for about 1 second after the power is switched ON. If the set has been moved or turned in a different direction, disconnect its AC power for at least 30 minutes.

If the chassis or parts of the cabinet become magnetized, poor color purity will result. If this happens, use an external degaussing coil. Slowly move the degaussing coil around the faceplate of the picture tube and the sides and front of the receiver. Slowly withdraw the coil to a distance of about 6 feet before removing power.

### 4-3-3 High Voltage Check

CAUTION: There is no high voltage adjustment on this chassis. The B+ power supply must be set to +130 volts (Full color bar input and normal picture level).

1. Connect a digital voltmeter to the second anode of the picture tube.
2. Turn on the TV. Set the Brightness and Contrast controls to minimum (zero beam current).
3. The high voltage should not exceed 33KV.
4. Adjust the Brightness and contrast controls to both extremes. Ensure that the high voltage does not exceed 33KV under any conditions.

### 4-3-4 FOCUS Adjustment

1. Input a black and white signal.
2. Adjust the tuning control for the clearest picture.
3. Adjust the FOCUS control for well defined scanning lines in the center area of the screen.

### 4-3-5 Cathode Voltage Adjustment (Screen Adjustment)

1. Input a Toshiba pattern.
2. Go to service mode and select 'G2-Adjust.
3. Adjust bottom VR of FBT to display "SCREEN ADJUST : OK"
4. Use the Menu or Mute key to complete G2 adjustment.

### 4-3-6 Purity Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Plug in the CRT deflection yoke and tighten the clamp screw.
3. Plug the convergence yoke into the CRT and set in as shown in Fig. 4-2.
4. Input a black and white signal.
5. Fully demagnetize the receiver by applying an external degaussing coil.
6. Turn the CONTRAST and BRIGHTNESS controls to maximum.
7. Loosen the clamp screw holding the yoke. Slide the yoke backward or forward to provide vertical green belt. (Fig. 4-3).
8. Tighten the convergence yoke.
9. Slowly move the deflection yoke forward, and adjust for the best overall green screen.
10. Temporarily tighten the deflection yoke.
11. Produce blue and red rasters by adjusting the low-light controls. Check for good purity in each field.
12. Tighten the deflection yoke.

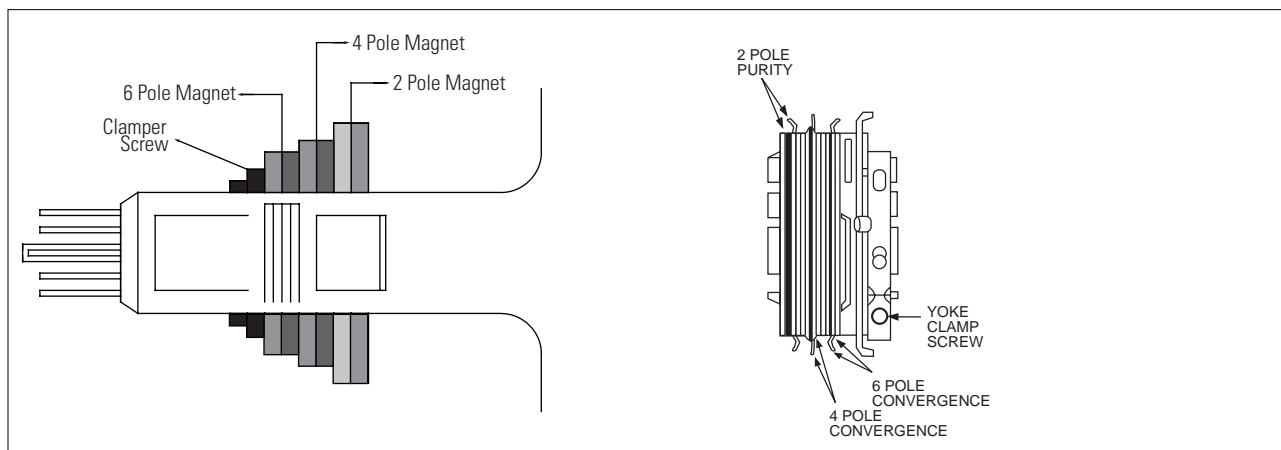


Fig. 4-2 Convergence Magnet Assembly

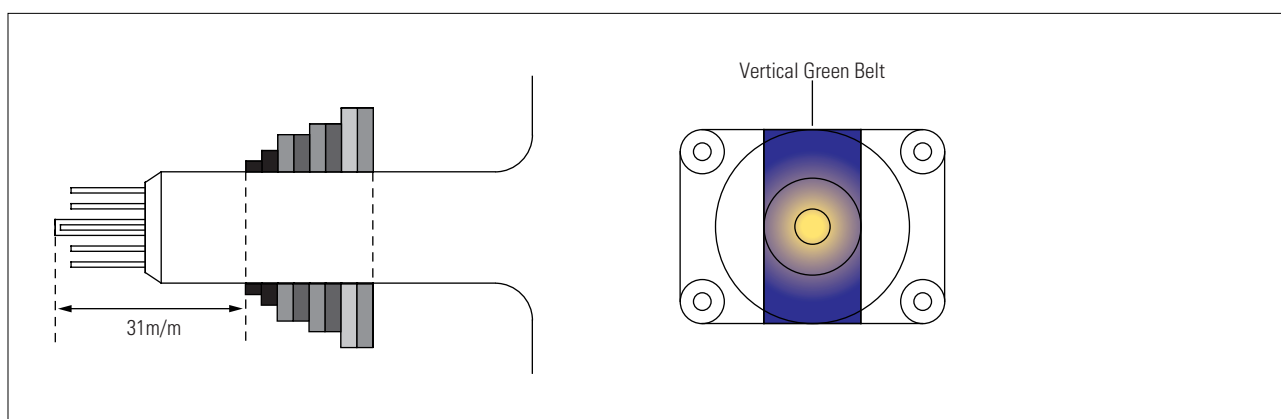


Fig. 4-3 Center Convergence Adjustment

### 4-3-7 White Balance Adjustment

#### (a) Set up

1. Warm up the TV for at least 30 minutes in the Aging Mode (OSD White). This mode is displayed by entering the following sequence:

DISPLAY → FACTORY → FACTORY

2. Input a Toshiba pattern.

#### (b) Low-Light Adjustment

1. Set SBT to 1.5 fL in the Factory Service Mode with using CA100. See Fig. 4-4.
2. Adjust RG,BG so that the levels are suitable to each local area.

#### (c) High-Light Adjustment

1. Set SCT to 45 FL in the Factory Service Mode with using CA100. See Fig. 4-4 .

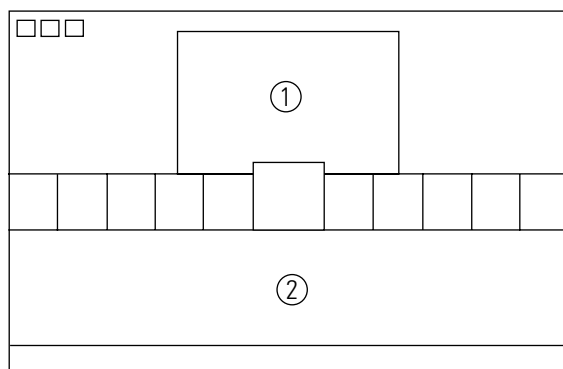


Fig. 4-4

### 4-3-8 Center Convergence Adjustment

1. Warm up the receiver for at least 20 minutes.
2. Adjust the two tabs of the 4 pole magnets to change the angle between them. Superimpose the red and blue vertical lines in the center area of the screen.
3. Adjust the Brightness and Contrast controls for a well defined picture.
4. Adjust the two-tab pairs of the 4 pole magnets, and change the angle between them. Superimpose the red and the blue vertical lines in the center area of the screen.
5. Turn the both tabs at the same time, keeping the angle constant, and superimpose the red and blue horizontal line in the center of the screen.
6. Adjust the two-tab pairs of the 6-pole magnets to superimpose the red and blue line onto the green. (Changing the angle affects the vertical lines, and rotating both magnets affects the horizontal lines.)
7. Repeat adjustments 2~6, if necessary.
8. Since the 4-pole magnets and 6-pole magnets interact, the dot movement is complex (Fig. 4-5).



Fig. 4-5 Center Convergence Adjustment

### 4-3-9 RF AGC Adjustment

Set the AGC data to 33 (Factory Mode).

### 4-3-10 Sub-Color Adjustment

Set NSR data to 10 (Factory Mode).

### 4-3-11 Geometry Adjustment

SC → VS → VA → VSL → HS

1. Input a lion head pattern.
2. Set the SC (S-Correction) as 29 and VS (Vertical Shift) 31 so that the lion head circle becomes oval.
3. Adjust with VA (Vertical Amplitude) so that the top margin of the picture is 4.




Fig. 4-7

4. Adjust with VSL (Vertical-Slope) so that the bottom margin of the picture is 4.




Fig. 4-8

5. Adjust with HS (Horizontal Shift) so that the lion-head pattern and CRT centers are aligned.





Fig. 4-9


6. Adjust EWID (EW Width) so that the left and right margins of the picture are 5.
7. Input a cross-hatch pattern.

## 8. Adjust EW Geometry


1 HPAR (Horizontal Parallelogram)

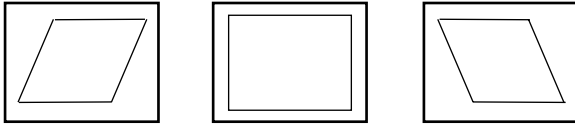


5 EUCN (EW Upper Coner)

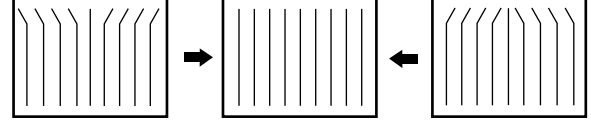


2 HBOW (Horizontal Bow)

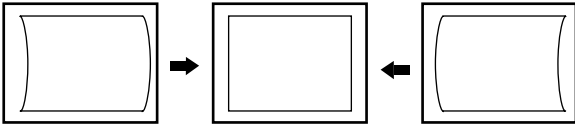


6 ELCN (EW Lower Coner)

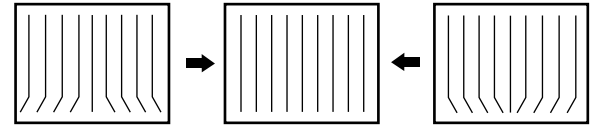


3 EWID (EW Width)

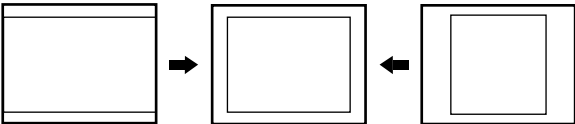

7 ETRP (EW Trapezivm)

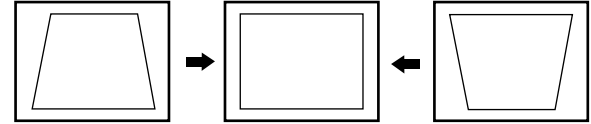

4 EPAR (EW Parabola)

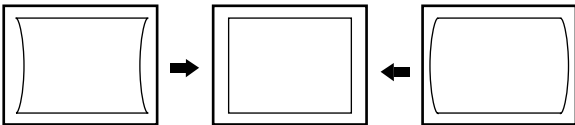







# MEMO

## 5. Troubleshooting


### 5-1 No Power

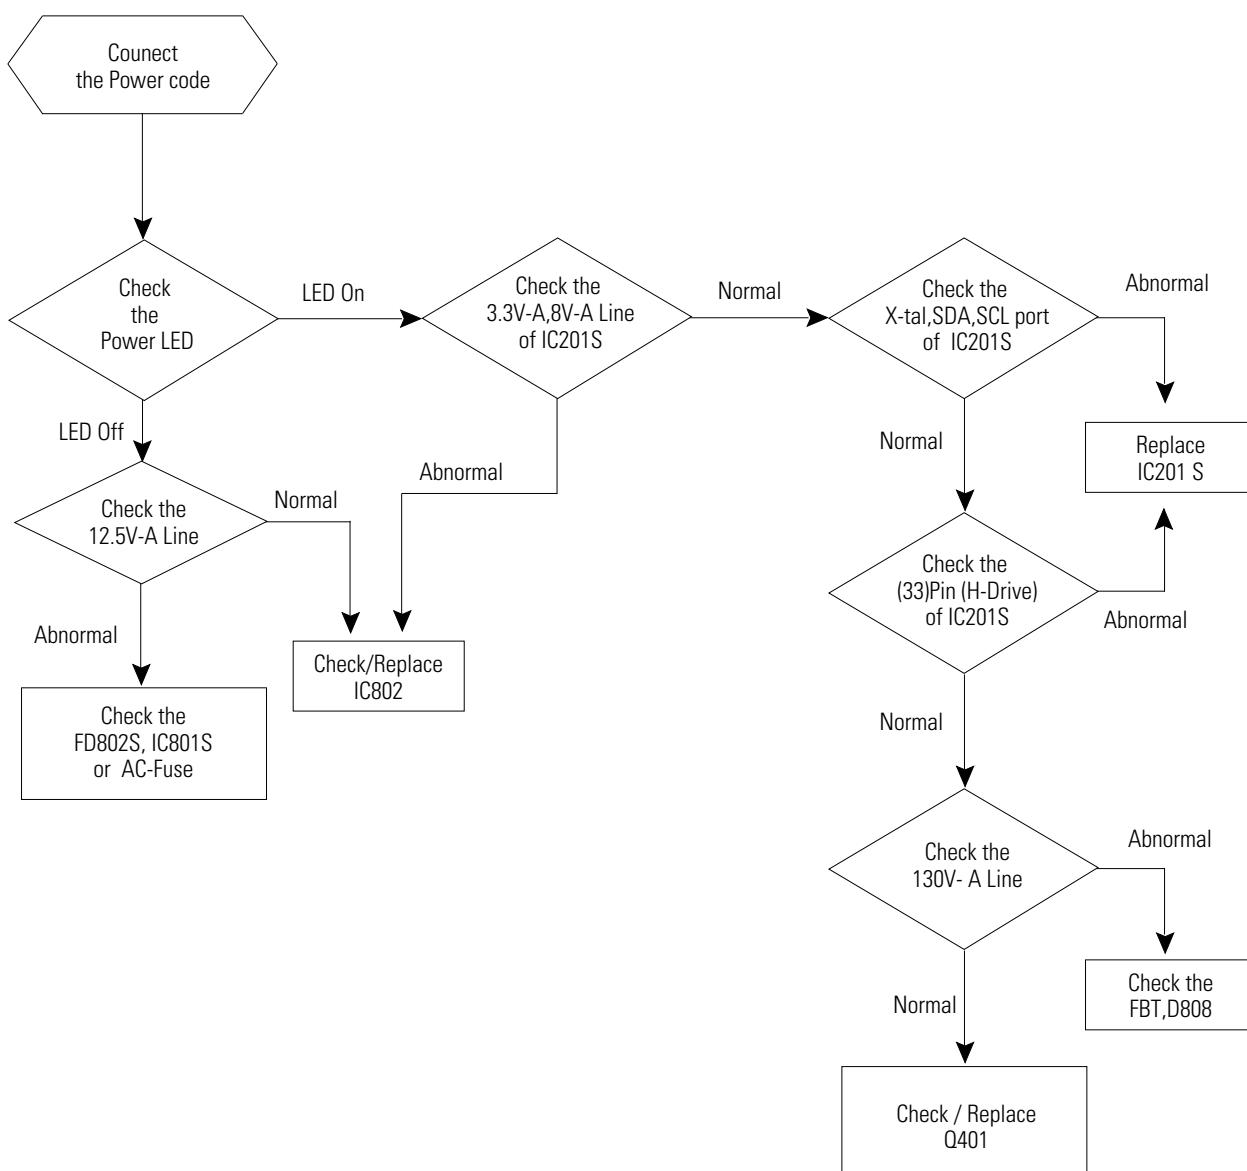

## 5-2 No Video (Sound OK)

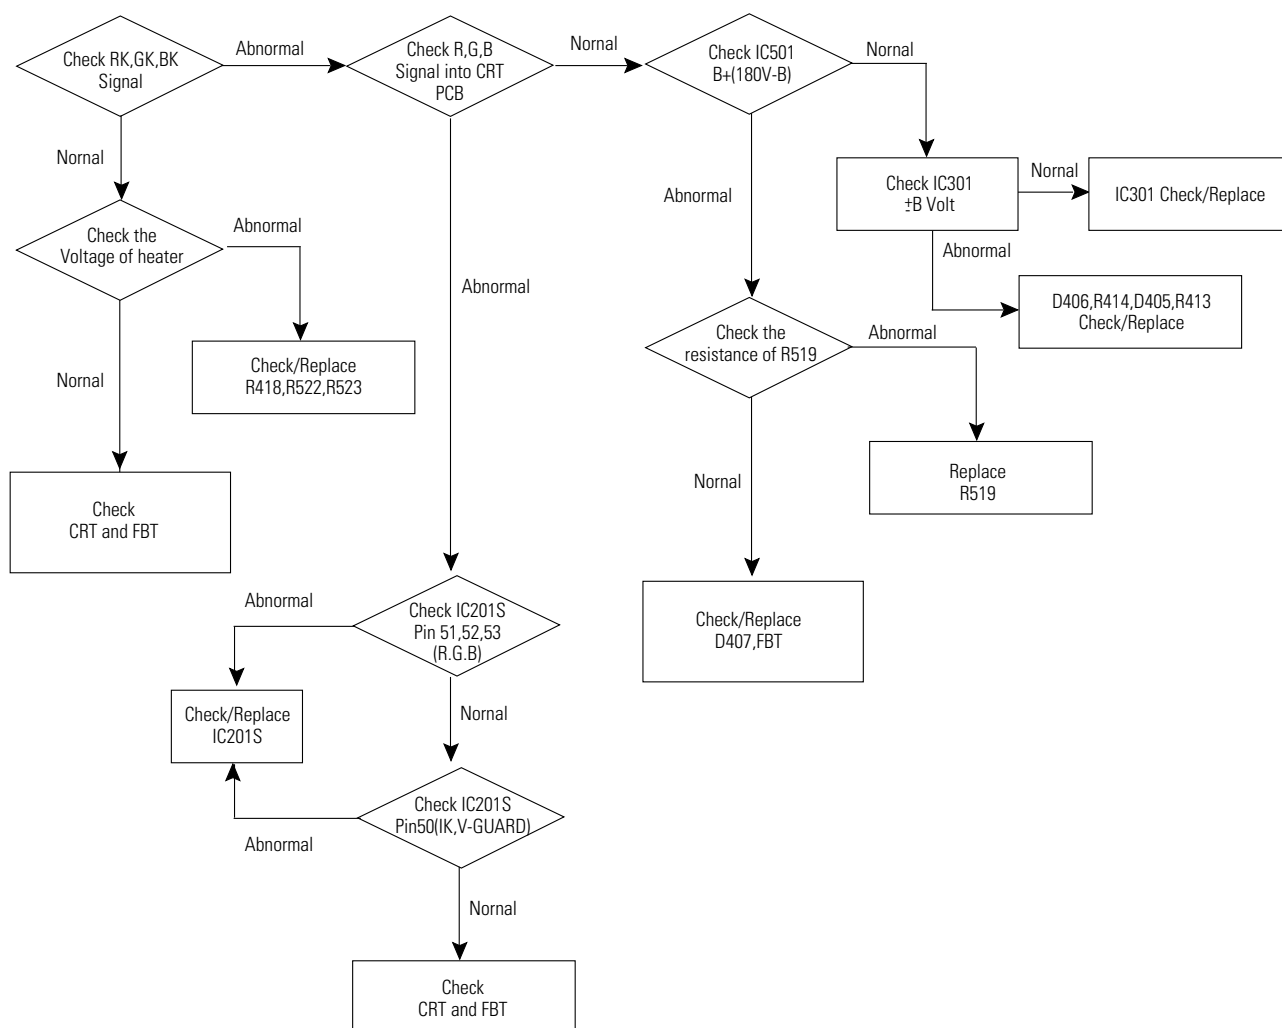


## 5-3 No Sound (Video OK)

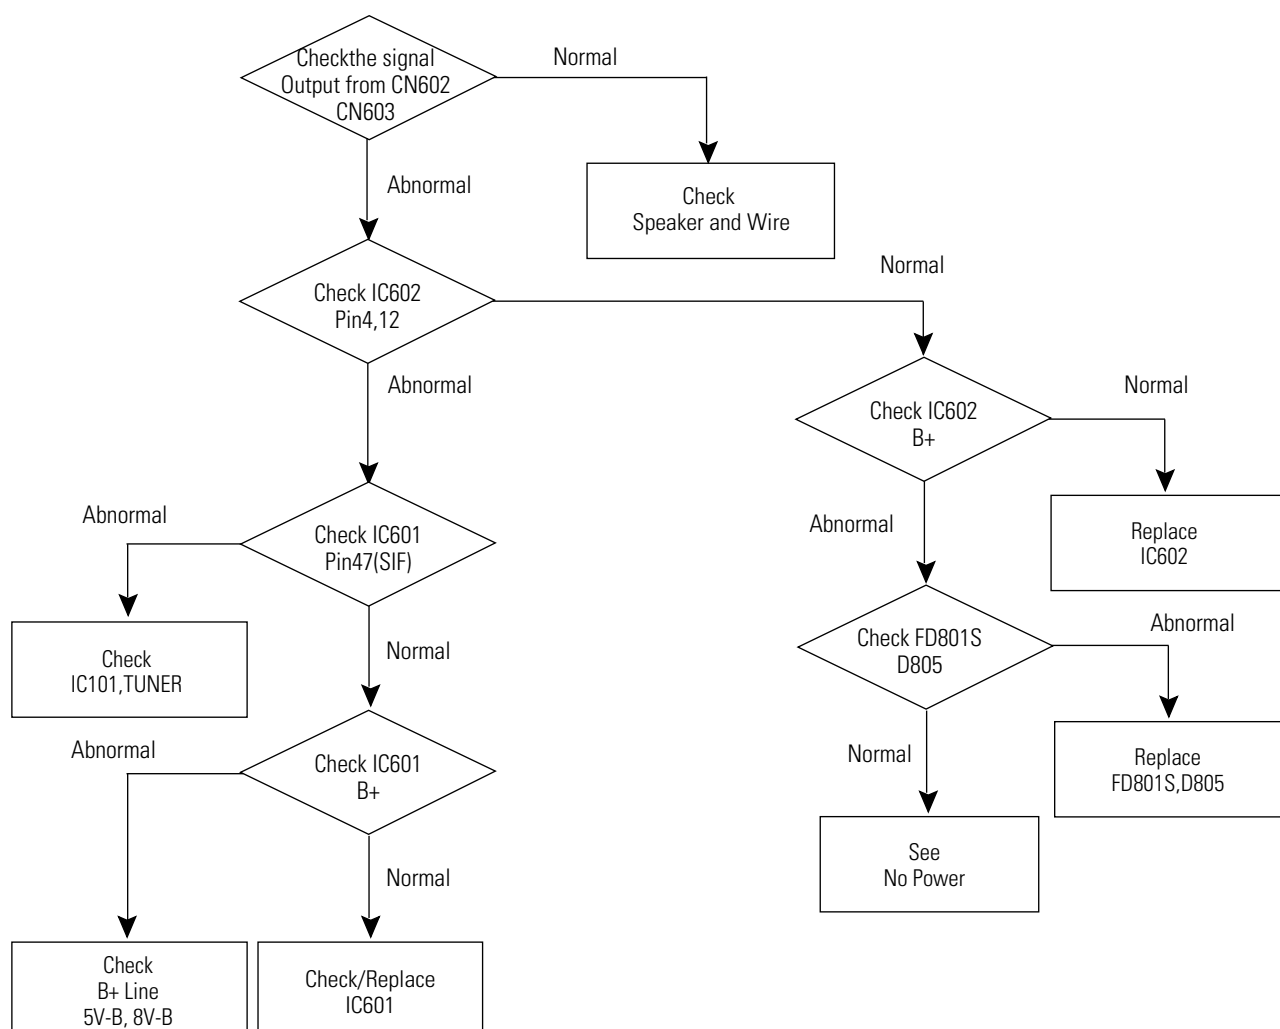

## 5-4 Horizontal Lines Appear or Screen


---

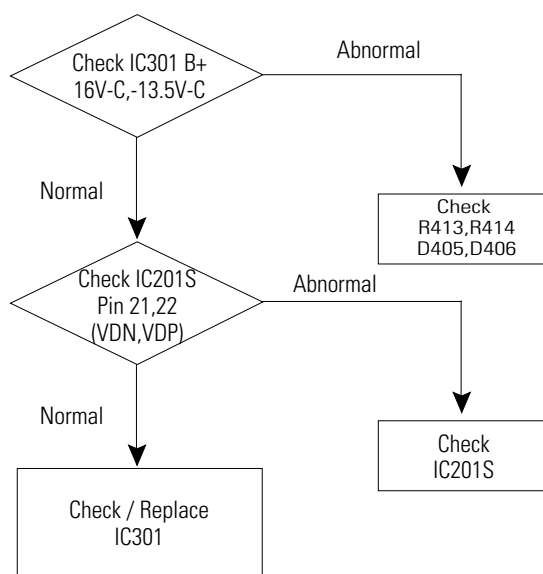

6. Exploded View & Parts List

6-1 CL25M6WKX/XAX


You can search for the updated part code through ITSELF web site.  
URL : <http://itself.sec.samsung.co.kr>

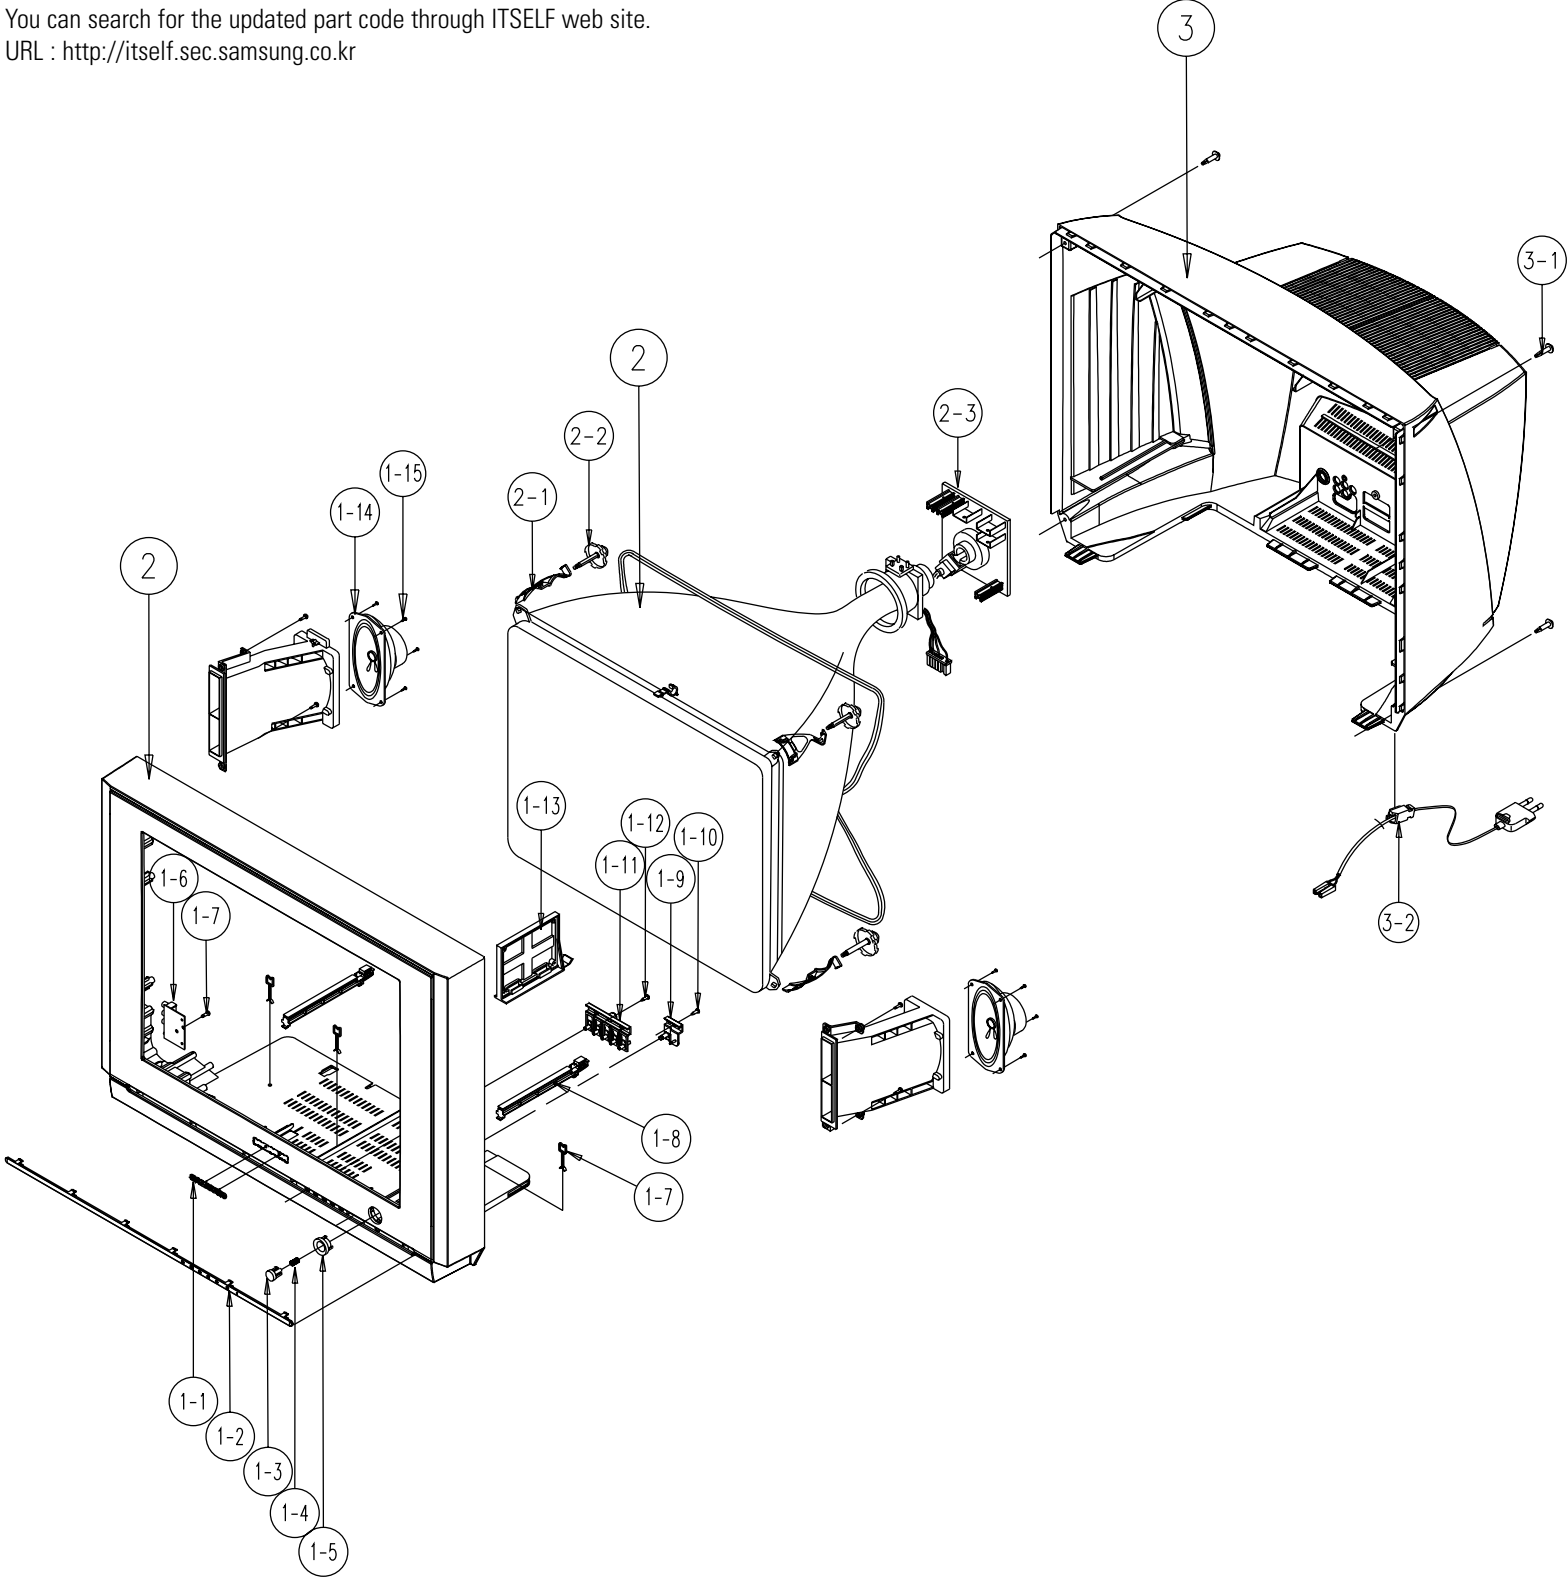

No	Code No	Description;Specification	Q'ty	Remark
1	AA64-03221A	CABINET FRONT;25M6,HIPS,HB,G4309,K57A	1	F/C
1-1	AA64-70117B	BADGE-BRAND;-,AL,-,-,L65,R2000,SILVER,SS	1	
1-2	AA63-00489B	COVER-CONTROL;25M6,ABS,HB,WHT,SVM6145+CL	1	
1-3	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11	1	
1-4	AA61-60003J	SPRING-CS;- ,SUS304,-,-,OD6,N7,OD6,-,-,-,	1	
1-5	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV	1	
1-6	AA96-01156A	ASSY MISC,A/V SIDE,CFT2791KX/SMS;K57A	1	A/SIDE
1-7	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZP	2	AV+CF
1-8	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO	2	
1-9	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR	1	
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10	1	
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13	AA61-00813B	SUPPORT-CRT;25M6,29M6,HIPS,HB,NATURL	1	
1-14	AA91-00507A	ASSY HOLDER SPK;- ,.80HM/15W,-,ASSY HOLD	1	
1-15	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	4	SPK+CF
2	AA03-00322A	CRT COLOR;A59QDF891X999,+380MG,1.05MH,1.	1	CRT
2-1	AA65-30017A	CLAMP-D,COIL;- ,NYLON-66,V0,-,NTR,DADH300	2	
2-2	AA60-10050V	SCREW-ASSY;- ,SWRCH18A,M6,L30,HH,+,WC,-,Z	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-02098C	CABINET-BACK;25M6,HIPS,HB,G4309	1	B/C
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	5	CB+CF
3-2	AA96-20112A	ASSY-POWER,CORD;EP2/NP,H/C300	1	PWR/AC

6-2 CL25M6WKX/XAP

You can search for the updated part code through ITSELF web site.  
URL : <http://itself.sec.samsung.co.kr>

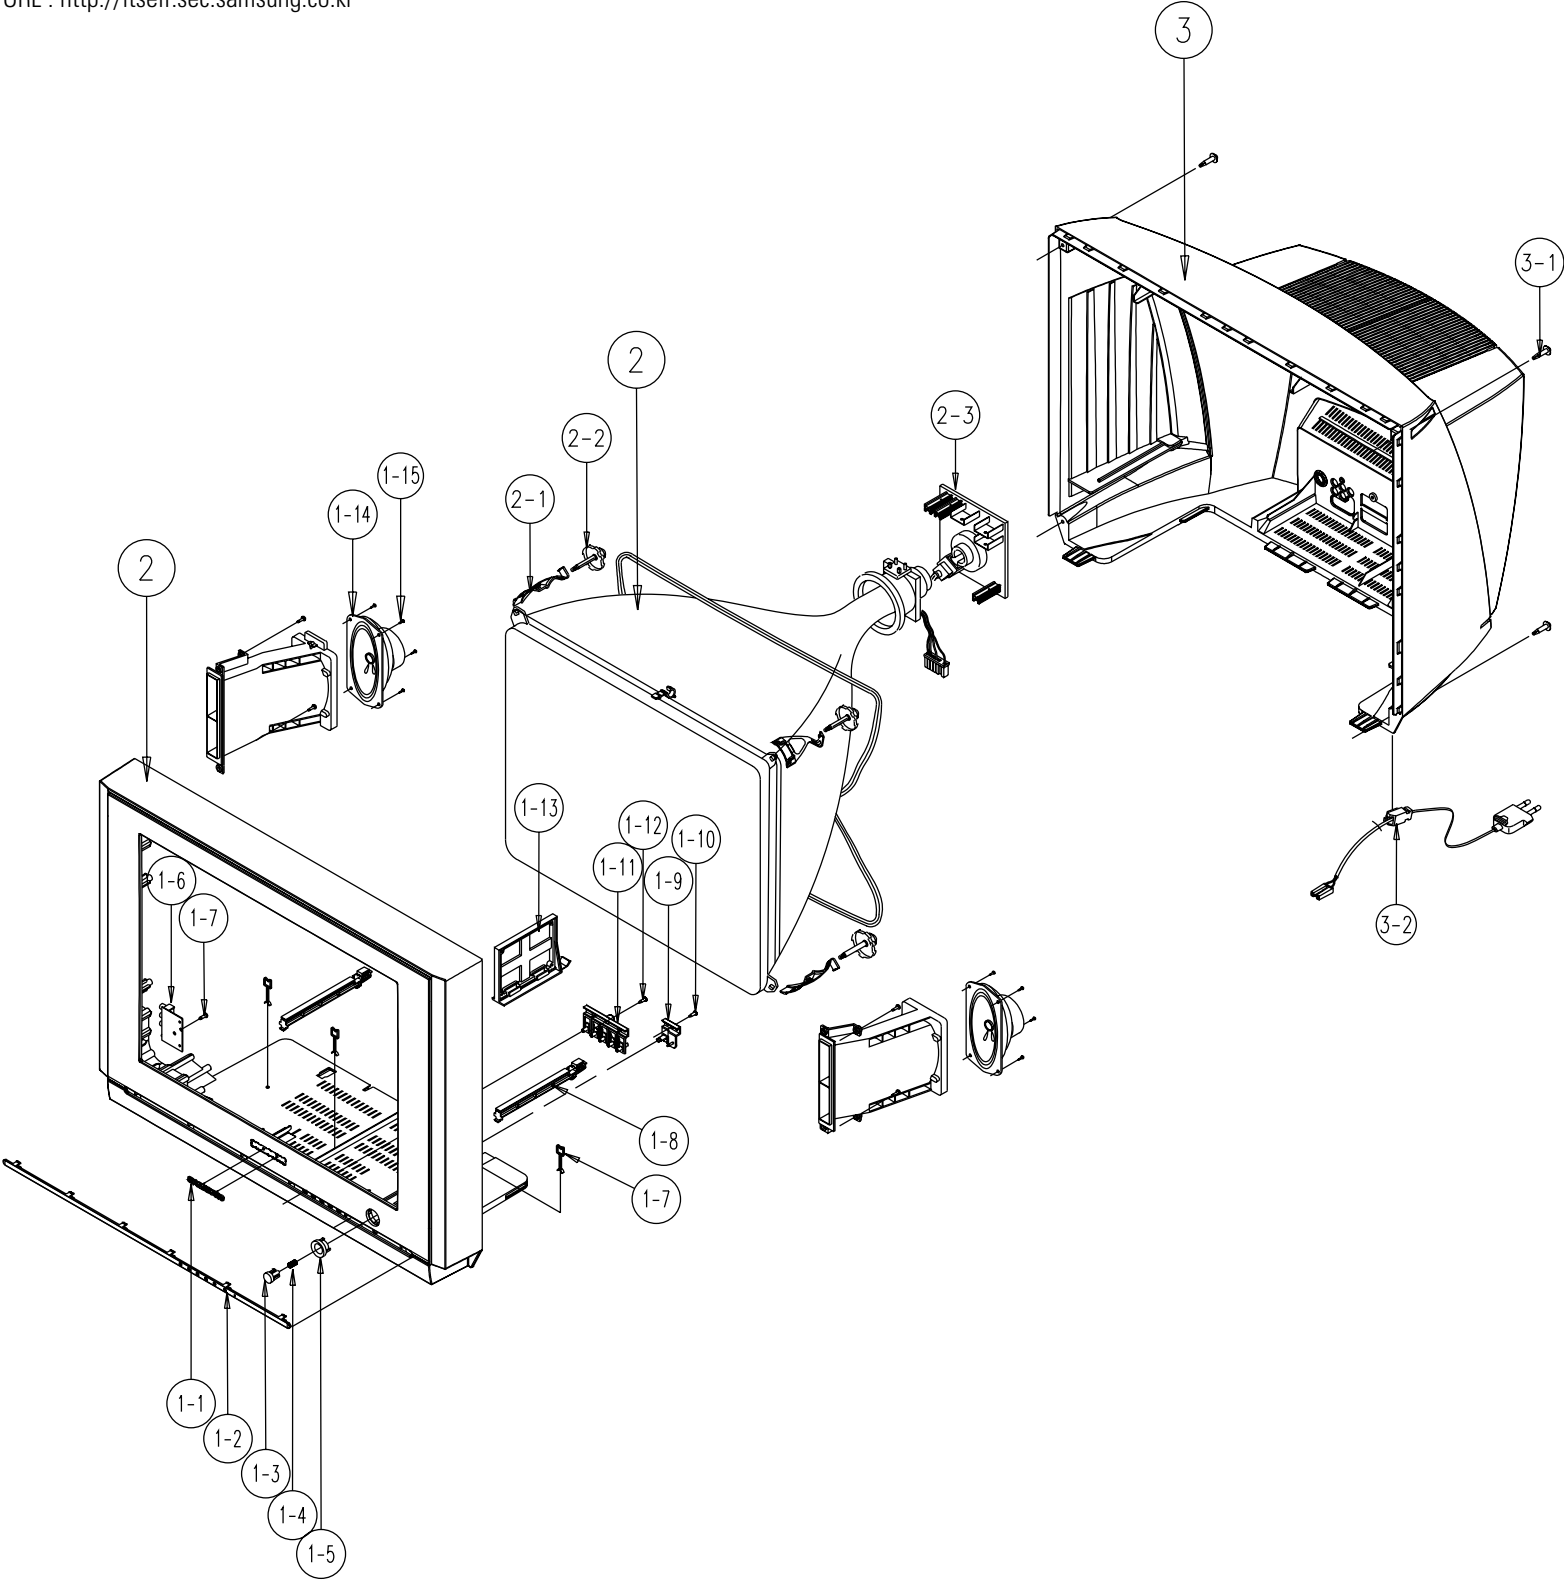


No	Code No	Description;Specification	Q'ty	Remark
	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,	1	F/C
1-1	AA64-70123A	BADGE-BRAND;NEW,AL,-,-,L=50,FLAT,SILVER,	1	
1-2	AA63-00613A	COVER-CONTROL;DP,21M6,AA63-00540A	1	CC
1-3	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11	1	KP
1-4	AA61-60003J	SPRING-CS;-,-,SUS304,-,-,OD6,N7,OD6,-,-,-,	1	
1-5	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV	1	DP
1-6	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WK,K57A	1	APAVS
1-7	6003-001268	SCREW-TAPTITE;TH,+,B,M4,0,L12.0,ZPC(YEL)	1	AV+CF
1-8	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO	2	HP
1-9	AA64-02103B	WINDOW-RMC,L,ED;25M6,29M6,ACRYL,HB,CLEAR	1	WR
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13		SUPPORT-CRT	1	
1-14	AA91-00427A	ASSY HOLDER SPK;-,-,PP,80HM/15W,BLK,SEMI-D	1	AHS
1-15	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	4	SPK+CF
2	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2	1	CRT
2-1	AA65-00009B	CLAMP-D,COIL;NYLON 66,V0,-,-,21A8,-	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-02841A	CABINET BACK;DP,21M6,HB,AA64-02331B	1	C/B
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2	AA96-20112A	ASSY-POWER,CORD;EP2/NPH/C300	1	PWR/AC



6-3 CL21M6WKX/STR


You can search for the updated part code through ITSELF web site.  
URL : <http://itself.sec.samsung.co.kr>

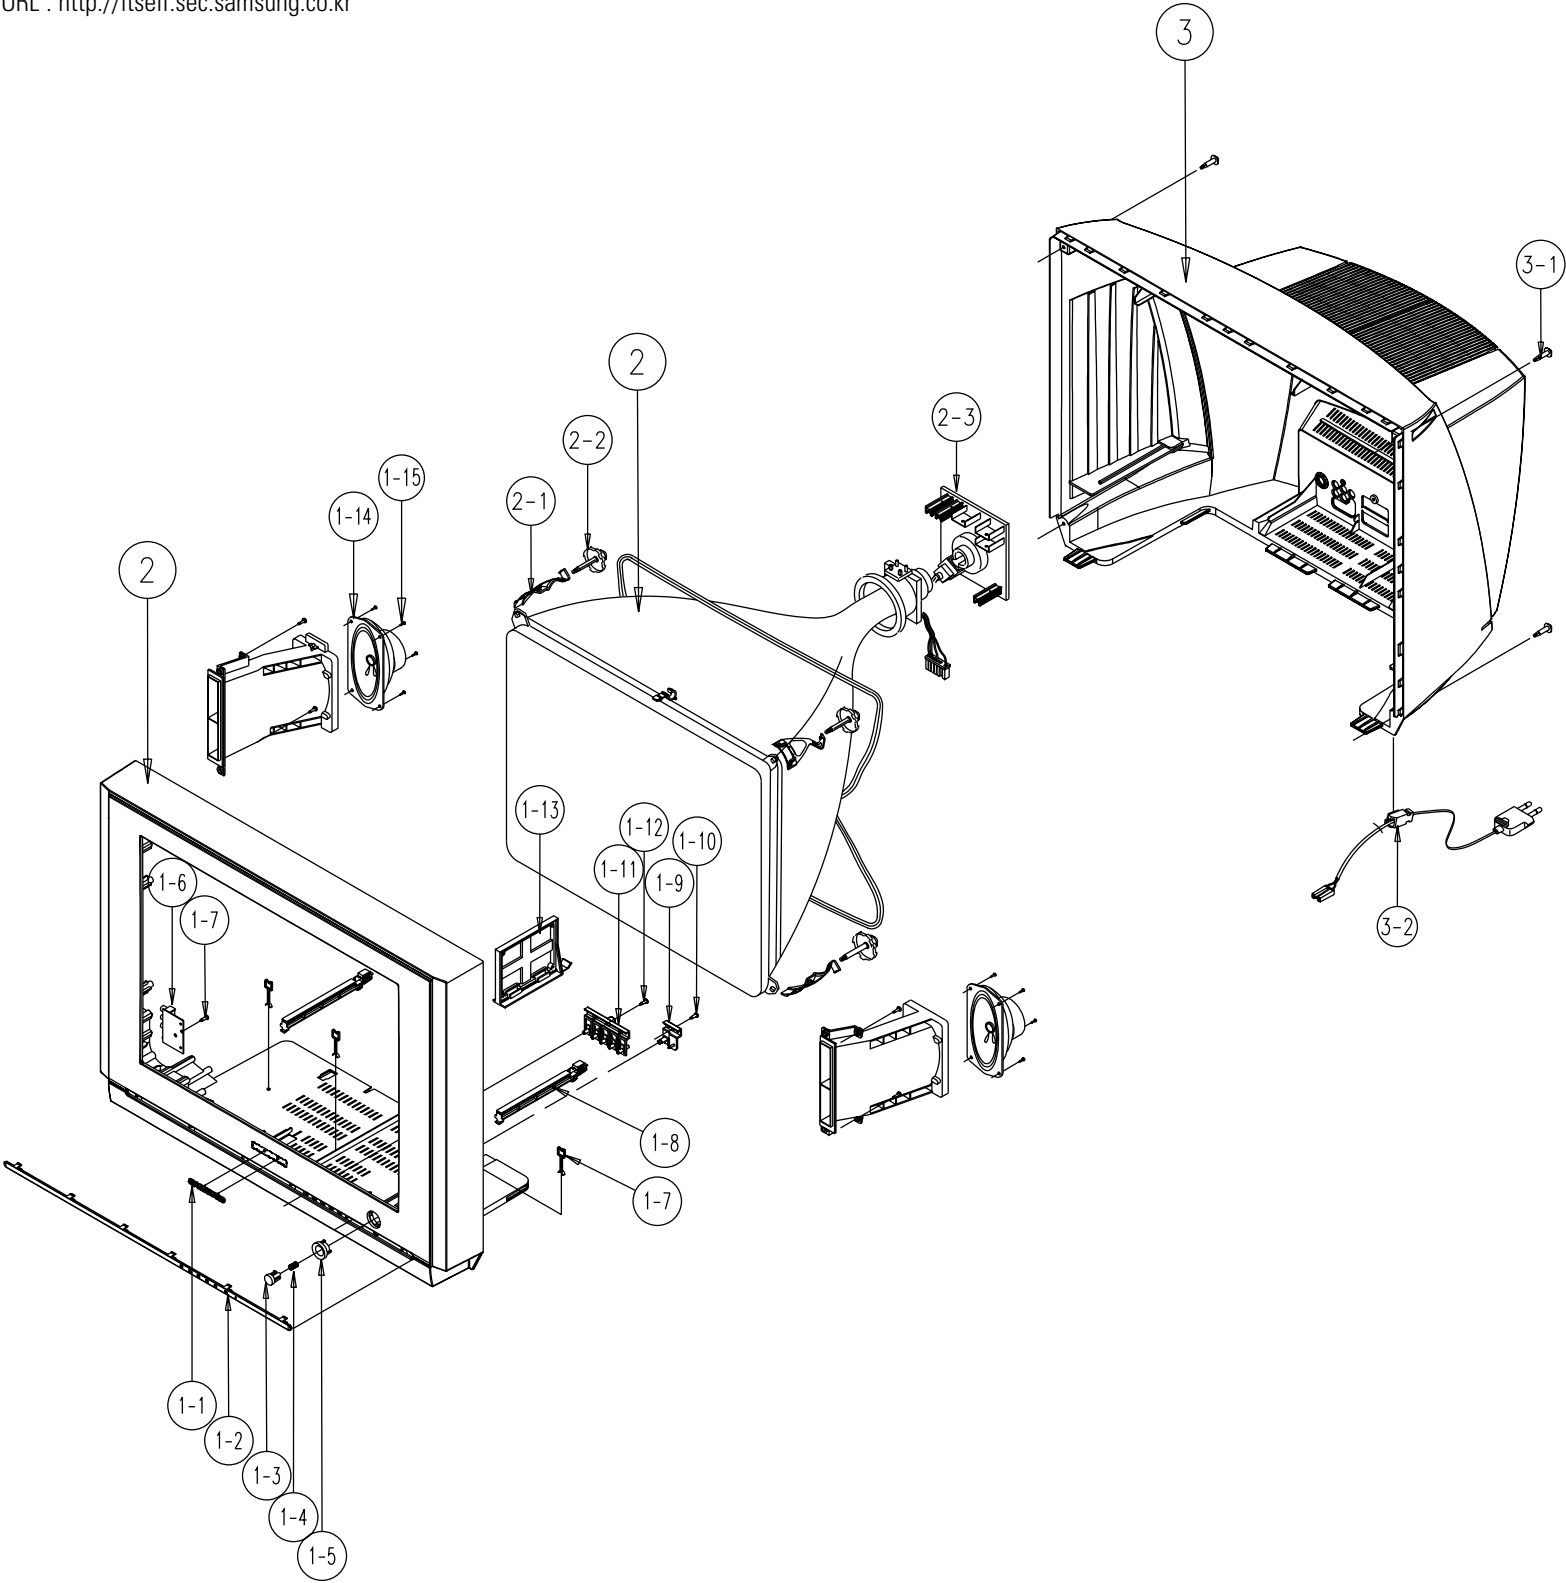

No	Code No	Description;Specification	Q'ty	Remark
1-1	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,	1	F/C
1-2	AA63-00613A	COVER-CONTROL;DP;21M6,AA63-00540A	1	CC
1-3	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11	1	KP
1-4	AA61-60003J	SPRING-CS;-,-,SUS304,-,-,OD6,N7,OD6,-,-,-,	1	
1-5	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV	1	DP
1-6	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WK,K57A	1	APAVS
1-7	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	1	AV+CF
1-8	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO	2	HP
1-9	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR	1	WR
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13		SUPPORT-CRT	1	
1-14	AA91-00427A	ASSY HOLDER SPK;-,-,PP,80HM/15W,BLK,SEMI-D	1	AHS
1-15	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	4	SPK+CF
2	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2	1	CRT
2-1	AA65-00009B	CLAMP-D,COIL;NYLON 66,V0,-,-,21A8,-	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-02841A	CABINET BACK;DP;21M6,HB,AA64-02331B	1	C/B
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	1	PWR/AC

6-4 CL21M6WKX/XAP


You can search for the updated part code through ITSELF web site.  
URL : <http://itself.sec.samsung.co.kr>

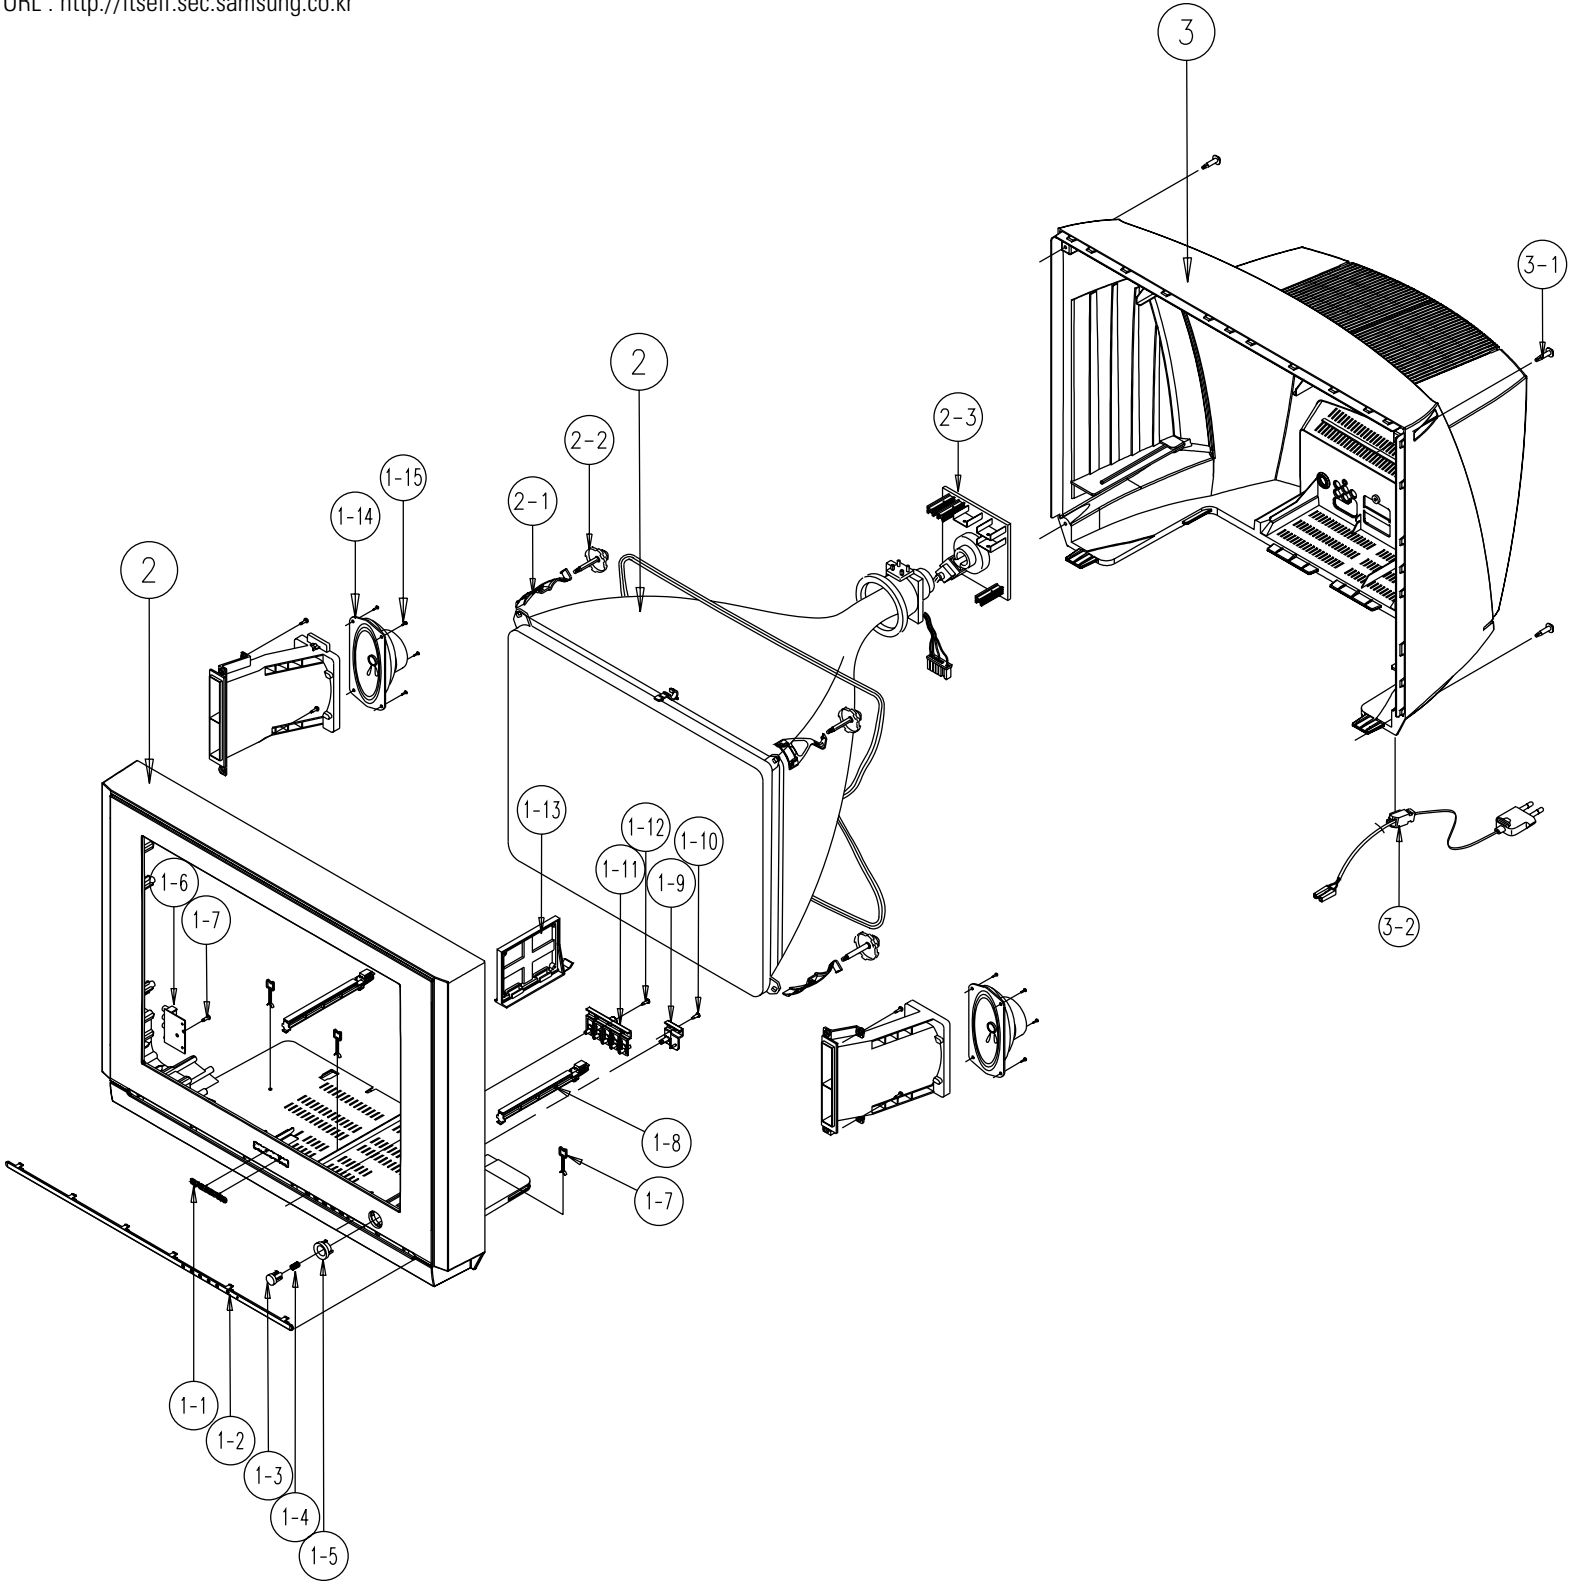

No	Code No	Description;Specification	Q'ty	Remark
1-1	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,	1	F/C
1-2	AA63-00613A	COVER-CONTROL;DP;21M6,AA63-00540A	1	CC
1-3	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11	1	KP
1-4	AA61-60003J	SPRING-CS;- ,SUS304,-,-,OD6,N7,OD6,-,-,-,	1	
1-5	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV	1	DP
1-6	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WK,K57A	1	APAVS
1-7	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	1	AV+CF
1-8	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO	2	HP
1-9	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR	1	WR
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13		SUPPORT-CRT	1	
1-14	AA91-00427A	ASSY HOLDER SPK;- ,PP,80HM/15W,BLK,SEMI-D	1	AHS
1-15	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	4	SPK+CF
2	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2	1	CRT
2-1	AA65-00009B	CLAMP-D,COIL;NYLON 66,V0,-,-,21A8,-	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-02841A	CABINET BACK;DP;21M6,HB,AA64-02331B	1	C/B
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	1	PWR/AC

6-5 CL21M6WKX/RCL


You can search for the updated part code through ITSELF web site.  
URL : <http://itself.sec.samsung.co.kr>

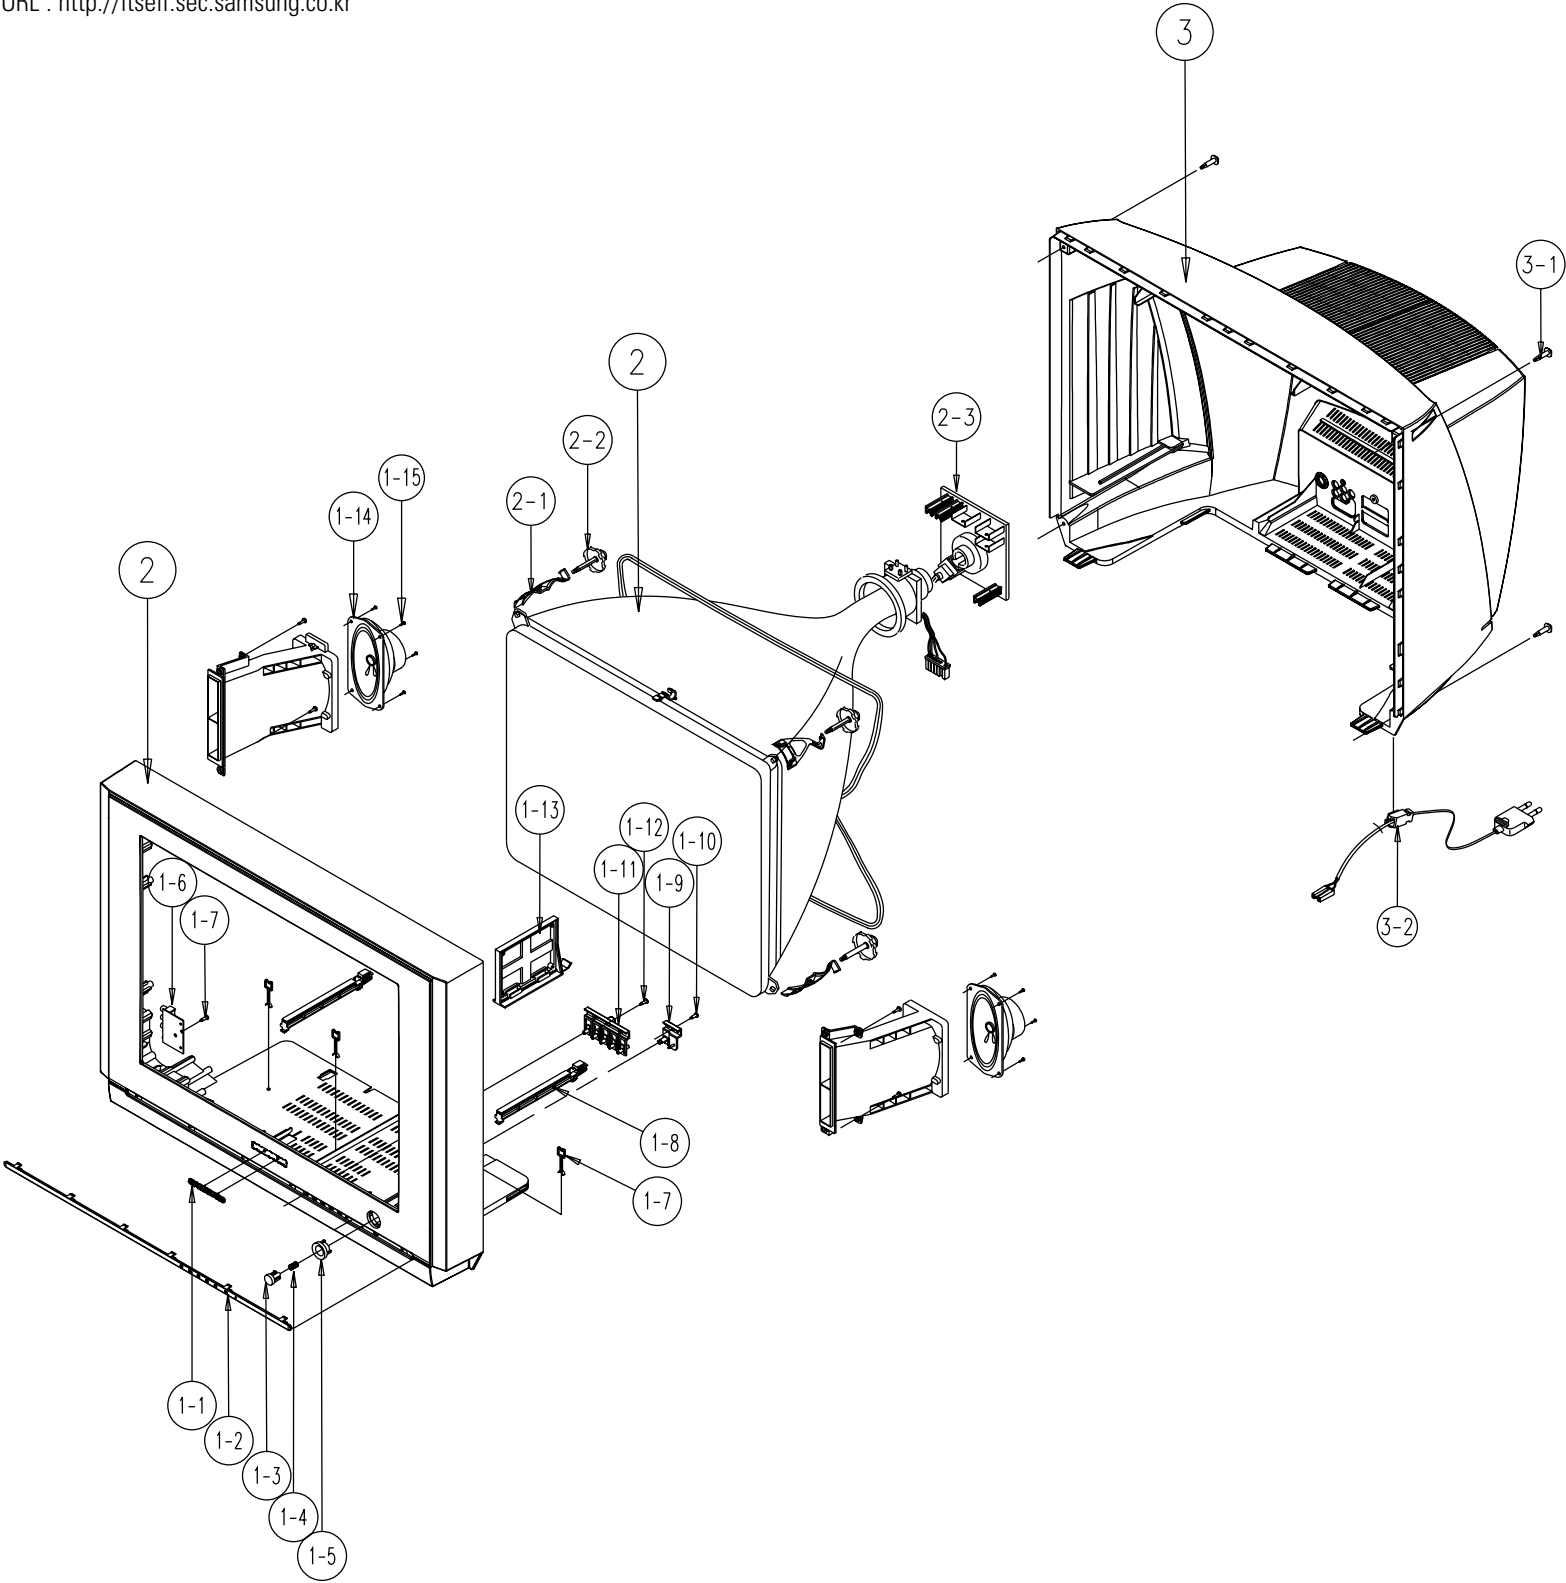

No	Code No	Description;Specification	Q'ty	Remark
	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,	1	F/C
1-1	AA64-70123A	BADGE-BRAND;NEW,AL,-,-,L=50,FLAT,SILVER,	1	
1-2	AA63-00613A	COVER-CONTROL;DP;21M6,AA63-00540A	1	CC
1-3	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11	1	KP
1-4	AA61-60003J	SPRING-CS;-,-,SUS304,-,-,OD6,N7,OD6,-,-,-,	1	
1-5	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV	1	DP
1-6	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WK,K57A	1	APAVS
1-7	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	1	AV+CF
1-8	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO	2	HP
1-9	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR	1	WR
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13		SUPPORT-CRT	1	
1-14	AA91-00427A	ASSY HOLDER SPK;-,-,PP,80HM/15W,BLK,SEMI-D	1	AHS
1-15	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	4	SPK+CF
2	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2	1	CRT
2-1	AA65-00009B	CLAMP-D,COIL;NYLON 66,V0,-,-,21A8,-	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-02841A	CABINET BACK;DP;21M6,HB,AA64-02331B	1	C/B
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	1	PWR/AC

6-6 CL21M6WKX/XA0

You can search for the updated part code through ITSELF web site.  
URL : <http://itself.sec.samsung.co.kr>

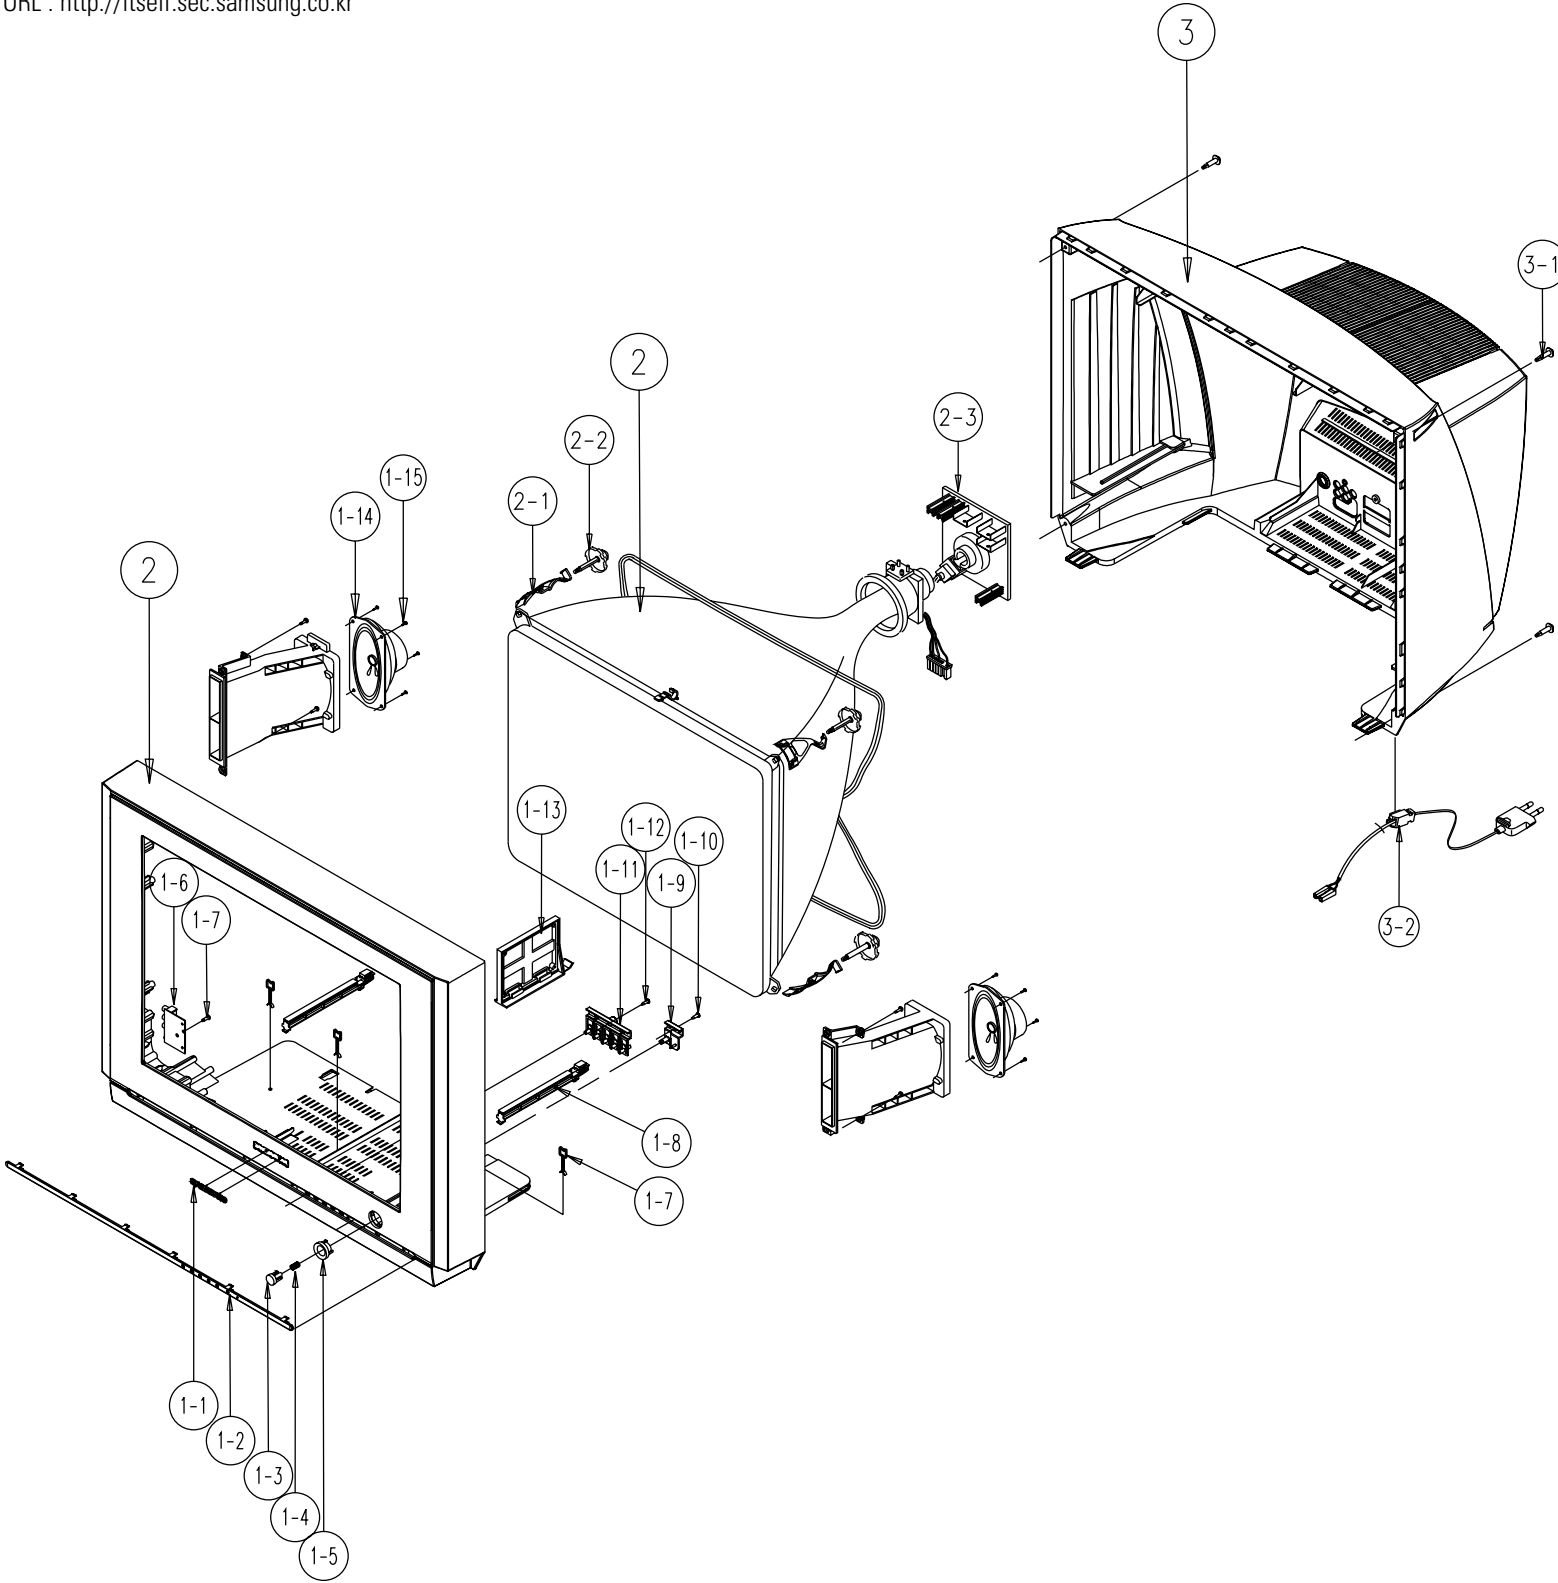

No	Code No	Description;Specification	Q'ty	Remark
1-1	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,	1	F/C
1-2	AA63-00613A	COVER-CONTROL;DP;21M6,AA63-00540A	1	CC
1-3	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11	1	KP
1-4	AA61-60003J	SPRING-CS;-,-,SUS304,-,-,OD6,N7,OD6,-,-,-,	1	
1-5	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV	1	DP
1-6	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WK,K57A	1	APAVS
1-7	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)	1	AV+CF
1-8	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO	2	HP
1-9	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR	1	WR
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	WR+CF
1-11	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10	1	KC
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	1	KC+CF
1-13		SUPPORT-CRT	1	
1-14	AA91-00427A	ASSY HOLDER SPK;-,-,PP,80HM/15W,BLK,SEMI-D	1	AHS
1-15	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	4	SPK+CF
2	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2	1	CRT
2-1	AA65-00009B	CLAMP-D,COIL;NYLON 66,V0,-,-,21A8,-	4	CDCOIL
2-2	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR	4	CRT+CF
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	1	V999S
3	AA64-02841A	CABINET BACK;DP;21M6,HB,AA64-02331B	1	C/B
3-1	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	4	CB+CF
3-2	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,	1	PWR/AC

## 7. Electrical Parts List

### 7-1 CL25M6WKX/XAX

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
<b>ASSY CHASSIS</b>							
1	A/CHAS	AA91-05968A	ASSY CHASSIS;25,SEM,K57A,CL25M6,S-VHS+D	3	IC301	AA96-50406A	ASSY-H/S;LA62-30180K,LA7845
				4		1204-000517	IC-LINEAR;LA7845SIPVERTICALAMP
				4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW
				4		AA62-30180K	HEATSINK-ES,-,A6063EXTR,-,WHT,50/13,-,
				△ 3	D805	BP96-00020F	ASSY HEAT SINK P,H/S TR,SCREW,FFPF10U20S
2	A/MAIN	AA94-12388A	ASSY PCB MAIN;25,SEM,CL25M6,K57A,S-VHS+	4		0205-000129	GREASE-SILICON;SC102,JAPAN
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3.63/37	4		0402-001375	DIODE-RECTIFIER;FFPF10U20S,200V,10A,TO-2
3		0202-000187	SOLDER-WIREFLUX,-,RS60S,D1.2,6	4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000	4		AA62-00045A	HEAT SINK-PS,-,T1.0,-,DREAM,-,-,-,-,
3		0204-001024	FLUX;DF-96TVS,-,20%,-	△ 3	D808	BP96-00020J	ASSY HEAT SINK P,H/S TR,SCREW,FMG-G2CS,O
△ 3	D801S	0402-001160	DIODE-BRIDGE;D5SB60,600V,2.8A,SIP-4,ST	4		0205-000129	GREASE-SILICON;SC102,JAPAN
3	D404	0402-001296	DIODE-RECTIFIER;FMP-3FU,1500V,5A,TO-3PF	4		0402-001230	DIODE-RECTIFIERFMG-G2CS,1000V,3A,TO-22
△ 3	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW	4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
3	ICW01	1001-000211	IC-VIDEO SWITCH;NJM2235D,-,DIP8P,300MIL	4		AA62-00045A	HEAT SINK-PS,-,T1.0,-,DREAM,-,-,-,-,
3	IC202	1103-001200	IC-EEPROM;M24C08-WBN6,1024x8Bit,DIP8P,3	△ 3	PWR/AC	AA96-20112A	ASSY-POWER,CORD;EP2/NPH/C300
3	IC601	1204-001662	IC-SOUND PROCESSOR;MSP3425G-B7,DIP52P5	4		AA39-10006K	POWER-CORD;KJ-10W,AWG SPT-2
△ 3	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T	4		AA61-20284A	HOLDER P CORD;PP,VO,BLK,KE-002
△ 3	PT801S	1404-001264	THERMISTOR-PTC;4.50HM,+30/-20%,220V,290V	3	L/POS	AA68-01018A	LABEL-POS,-,50mmX,13,-,WHITE,-
△ 3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-M(T	3	CN901	3711-002642	POST-HEADER;67094-003(AUTO)
△ 3	CR403S	2306-000255	C-FILM;CF922P1.6KV742-HBUP	3		3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
△ 3	CX801S	2306-000318	C-FILM,MPPF;220NF,20%,250V,-,2	△ 3	CR402S	2306-000357	C-FILM,MPPF;8.2nF,5%,1.6KV,BK,20x9.5x17.
△ 3	CR406S	2306-001017	C-FILM,MPPF;680NF,5%,400V,26X1	△ 3	LR401S	AA27-00099A	COIL LINEARITY;23.5uH,23.5uH,DR14x15C.5.
3	C803	2401-001426	C-AL;470UF,400V	3	QE01	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,
3	C821	2401-003633	C-AL;220UF,20%,160V,GP,ST,22X25MM,1	3	L405	AA27-00057A	COIL HORIZ. WIDTH;-,-,10mH,YL-9N 15x27.5 C
△ 3	SF101S	2904-001107	FILTER-SAW AV;45.75MHZ,SIP5K,TP,12.6dB,N	3	ICE01	1202-000103	IC-VOLTAGECOMP;393,DIP8P,300MIL,DUAL,
△ 3	SF102S	2904-001418	FILTER-SAW AV;45.75MHZ,-,ST,-,-,-	3	JA702	3722-001423	JACK-RCA;3P+S1P,3.4mm,NI,BLK,-
△ 3	RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO	3	A/AUTO	AA97-13616A	ASSY AUTO;25,K57A,CL25M6,S-VHS+DVD
△ 3	FP801S	3601-000293	FUSE-CARTRIDGE;250V,5A,SLOW-BLOW,GLASS,5	4	D202	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-	4	D206	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
3	JA701	3722-001333	JACK-RCA9P,3.2mm,NI,BLK	4	D304	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 3	IC201S	AA09-00316A	IC MICOM;TDA9592PS/N1/3I,SPM-464A,64P,3.	△ 4	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 3	T444S	AA26-00057A	TRANS-FBT,-,FUH-29A001B(S),25/29,130	△ 4	D809	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 3	T801S	AA26-00179C	TRANS SWITCHING;EER4950,K57A,CF72791KX,9	△ 4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 3	T401A	AA26-50001M	TRANS HORIZ DRIVE;-,-,80MH,520UH,4UH,E	4	DZ403	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
3	L808	AA27-00098A	COIL CHOKE;-,-,24uH,10%,-,0.1,3.0A,DR10X	4	DE01	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
3	L409	AA27-00056A	COIL HORIZ. WIDTH;-,-,600uH,YL9N 15x27.5 C	4	D408	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 3	LX801S	AA29-00011A	FILTER LINE NOISE;CZ32W8,-,0.20MAX,1.5KV	△ 4	D802	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
3	WG	AA39-20010B	LEAD-CONNECTOR,ASSY;-,-,YFH800-01,500MM,1P	△ 4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
3	CN503	AA39-20604A	LEAD CONNECTOR-ASSY;-,-,YBNH250-09,YBNH05/	4	D504	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-204A
△ 3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75	4	D402	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
3	CN603	3711-002644	POST-HEADER;67094-005(AUTO)	4	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
3	CN701	3711-002647	POST-HEADER;67094-008(AUTO)	4	D951	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
3	Q801	0502-000242	TR-POWER;KSA614,PNP,-80V,-55V,	△ 4	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1
3	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,150V,1	4	D405	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
3	Q401	AA96-00624A	ASSY H/S;-,-,POWER,AA62-00057A,KSD5703,WA	4	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4		0205-000129	GREASE-SILICON;SC102,JAPAN	4	D406	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4		0502-001136	TR-POWER;KSD5703,NPN,70W,TO-3PF,ST,8-	4	DE04	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	4	D303	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4		AA60-30001A	WASHER-PLATE;-,-,M3,ID3.5,15X8.5,T1.0,-,SB	4	D407	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4		AA62-00057A	HEAT SINK-PS;-,-,T1.0,-,41*20*60,D2,-,-,	4	D409	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
3	IC501	AA96-50311A	ASSY-H/S;-,-,VIDEO,AA62-30175D,TDA6107Q,-	4	DE02	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4		1201-001159	ICVIDEOAMP;TDA6107Q,ZIP,9P,300	4	D501	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP	4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4		AA62-30175D	HEATSINK-PS;-,-,SECC,T1.0,-,33X15X30FT-2	4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
△ 3	IC802	AA96-00245A	ASSY H/S;-,-,AA62-00055A,KA7632,-	4	DZ101	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		1203-001939	IC-POSIX.FIXED REG.;7632,SIP,10P,-,PLASTI	4	DZ204	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP	4	DZ213	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-,	4	DZ214	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
△ 3	IC801S	AA96-50373K	ASSY H/S;-,-,POWER,AA62-30181K,K57A	4	DZ215	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		0205-000129	GREASE-SILICON;SC102,JAPAN	4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		1203-002597	IC-PWM CONTROLLER;KA501265RF-YDTU,TO-3PF	4	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	4	DZ602	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		AA61-11028A	BRACKET-IC;SECC,T1.0,-,	4	DZ805	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		AA62-30181K	HEATSINK-ES;-,-,AL6063EXTR,-,2,WHT,40MM,-	4	DZ806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
3	IC602	AA96-50398A	ASSY-H/S;-,-,AA62-30182E,TDA7297,-	4	DZ809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		0205-000129	GREASE-SILICON;SC102,JAPAN	4	DZ812	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4		1201-001064	IC-POWERAMP;7297,ZIP,15P,-,DUA	4	DZ802	0403-000699	DIODE-ZENER;TZP27B,27V,27-30.8
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW	4	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4		AA62-30182E	HEAT-SINK,ES;-,-,A6063 EXTR,-,WHT,-,-,-,40				

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	DZ811	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,	4	R504	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ803	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m	4	R505	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R506	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R605	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ206	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R606	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R607	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ209	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R608	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ210	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R613	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ211	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R614	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ212	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	RW01	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ218	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	RW02	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ220	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	RW04	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ221	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	RW05	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ222	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	RE07	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ223	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	RW03	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,
4	DZ224	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R206	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ501	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R213	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ502	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R258	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ503	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R315	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ504	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R615	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ808	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R618	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ208	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R619	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ216	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R813	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ217	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R822	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ219	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	4	R835	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ801	0403-001211	DIODE-ZENER;MTZJ12B,11.44-12.03V,500mW,D	4	RE03	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,
4	DZ303	0403-001221	DIODE-ZENER;UZ39BSB,35.36-37.19V,500mW,D	4	R248	2001-000343	R-CARBON;1300HM,5%,1/8W,AA,TP,1.8X3.2MM
4	DZ804	0403-001327	DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	4	J213	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	DZ301	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	4	R207	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	DZ305	0403-001328	DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	4	R617	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	DZ302	0403-001329	DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	4	RE01	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	DZ810	0403-001373	DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D	4	R717	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R602	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	4	R292	2001-000012	R-CARBON;680Kohm,5%,1/8W,AA,TP,1.8x3.2mm
4	D201	0404-000156	DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	4	R260	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP
4	Q205	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM	4	R261	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP
4	Q206	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM	4	R314	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP
4	Q211	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM	4	R833	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP
4	Q301	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM	4	R907	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP
4	Q702	0501-000283	TRANSISTOR;KSA539-Y(TAPG)/YTAM	4	R908	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP
4	Q951	0501-000369	TRANSISTOR;KSC2331-Y(TAPG)	4	R251	2001-000490	R-CARBON;2000HM,5%,1/8W,AA,TP
4	Q203	0501-000389	TRANSISTOR;KSC815-Y(TAPG)/YTAM	4	R279	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP
4	Q204	0501-000389	TRANSISTOR;KSC815-Y(TAPG)/YTAM	4	R716	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP
4	Q207	0501-000389	TRANSISTOR;KSC815-Y(TAPG)/YTAM	4	R101	2001-000554	R-CARBON;2700HM,5%,1/8W,AA,TP
4	Q208	0501-000389	TRANSISTOR;KSC815-Y(TAPG)/YTAM	4	R102	2001-000554	R-CARBON;2700HM,5%,1/8W,AA,TP
4	Q802	0501-000389	TRANSISTOR;KSC815-Y(TAPG)/YTAM	4	R250	2001-000554	R-CARBON;2700HM,5%,1/8W,AA,TP
4	Q701	0501-000389	TRANSISTOR;KSC815-Y(TAPG)/YTAM	4	R719	2001-000554	R-CARBON;2700HM,5%,1/8W,AA,TP
4	IC603	1203-000515	IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	4	R228	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM
⚠	IC803	1203-001217	IC-POST.ADJUSTREG;431,TO-92,3P,4.58MIL,P	4	R229	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM
⚠	VX801S	1405-000187	VARISTOR;750V,1250A,12.5x7mm,TP	4	R814	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM
4	R231	2001-000005	R-CARBON;3900HM,5%,1/8W,AA,TP	4	R245	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP
4	R289	2001-000011	R-CARBON;75Kohm,5%,1/8W,AA,TP,1.8x3.2mm	4	RE04	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP
4	R306	2001-000016	R-CARBON(S);10HM,5%,1/2W,AA,TP	4	R401	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP
4	R806	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	4	R270	2001-000628	R-CARBON;3000HM,5%,1/8W,AA,TP
4	R405	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,T	4	R271	2001-000628	R-CARBON;3000HM,5%,1/8W,AA,TP
4	R817	2001-000020	R-CARBON(S);220HM,5%,1/2W,AA,T	4	R216	2001-000645	R-CARBON;330KOHM,5%,1/8W,AA,TP
4	R809	2001-000109	R-CARBON(S);4700HM,5%,1/2W,AA,	4	R203	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R316	2001-000258	R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	4	R208	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	J708	2001-000258	R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	4	R209	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R712	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP	4	R223	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R713	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP	4	R230	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R103	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R236	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R202	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R293	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R210	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R294	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R211	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R829	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R212	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	RE08	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP
4	R214	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R221	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP
4	R215	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R222	2001-000739	R-CARBON;4.7MOHM,5%,1/8W,AA,TP
4	R219	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R601	2001-000780	R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R220	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R602	2001-000780	R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R272	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R603	2001-000780	R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R273	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R604	2001-000780	R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm
4	R274	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R104	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,
4	R275	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R714	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,
4	R276	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R246	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1
4	R277	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R217	2001-000857	R-CARBON;5600HM,5%,1/8W,AA,TP,
4	R288	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R610	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP
4	R296	2001-000281	R-CARBON;1000HM,5%,1/8W,AA,TP,	4	R612	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
4 R136	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4 R105	2001-000947	R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4 R708	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R711	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R247	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R705	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R706	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R707	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R709	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R710	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	
4 R514	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,	
4 R812	2001-001067	R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R402	2001-001077	R-CARBON(S);150OHM,5%,1/2W,AA,	
4 R823	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R824	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R828	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4 R404	2001-001114	R-CARBON(S);270OHM,5%,1/2W,AA,	
4 R825	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,	
4 R803	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA	
4 R804	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA	
4 R827	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AB	
4 R807	2001-001170	R-CARBON(S);6.8OHM,5%,1/2W,AB,	
4 R808	2001-001170	R-CARBON(S);6.8OHM,5%,1/2W,AB,	
4 R810	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AB,	
4 R403	2001-001079	R-CARBON(S);150HM,5%,1/2W,AB,T	
4 R501H	2002-001009	R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7	
4 R502H	2002-001009	R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7	
4 R511	2002-001009	R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7	
△ 4 RY801S	2002-001012	R-COMPOSITION;8.2MOhm,5%,1/2W,AA,TP,3.7X	
4 R313	2003-000537	R-METALOXIDE(S);1KOHM,5%,1W,AD	
4 R408	2003-000540	R-METALOXIDE(S);1KOHM,5%,2W,AD	
4 R801	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	
4 R802	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	
4 R830	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	
4 R831	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	
4 R841	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	
4 R818	2003-000998	R-METALOXIDE;300OHM,5%,2W,AF,T	
4 R832	2003-001035	R-METALOXIDE(S);270HM,5%,2W,AF	
4 R419	2003-001040	R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	
4 R423	2003-002007	R-METAL OXIDE(S);4.7KOHM,5%,2W,AF,TP,3.9	
4 R407	2003-002008	R-METAL OXIDE(S);18KOHM,5%,2W,AF,TP,3.9X	
4 R819	2003-002064	R-METALOXIDE;7.5OHM,5%,2W,AF,T	
4 R820	2003-002064	R-METALOXIDE;7.5OHM,5%,2W,AF,T	
4 R821	2003-002064	R-METALOXIDE;7.5OHM,5%,2W,AF,T	
4 R309	2003-002150	R-METAL OXIDE;270OHM,5%,2W,AG,TP,6X16MM	
4 R310	2003-002150	R-METAL OXIDE;270OHM,5%,2W,AG,TP,6X16MM	
4 R305	2004-001371	R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4 R307	2004-001371	R-METAL(S);1.5KOHM,1%,1/2W,AA,	
4 R834	2004-001889	R-METAL(S);127KOHM,1%,1/2W,AA,TP,2.5X6.5	
△ 4 RR401S	2004-001390	R-METAL(S);1KOHM,2%,1/2W,AA,TP	
4 R416	2004-001402	R-METAL(S);6.8KOHM,1%,1/2W,AA,	
4 R420	2001-001073	R-CARBON(S);130KOHM,5%,1/2W,AA,TP,2.4X6.	
4 R417	2001-001073	R-CARBON(S);130KOHM,5%,1/2W,AA,TP,2.4X6.	
4 R280	2004-001914	R-METAL;39KOHM,2%,1/8W,AA,TP,1	
4 R826	2004-001983	R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	
4 R815	2008-000205	R-FUSIBLE(S);100HM,5%,1/2W,AF,	
4 R413	2008-000253	R-FUSIBLE(S);0.47OHM,5%,1W,AF,	
4 R414	2008-000253	R-FUSIBLE(S);0.47OHM,5%,1W,AF,	
4 R312	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	
4 R513	2008-001133	R-FUSIBLE(S);0.75ohm,5%,AF,TP,3.9x10mm	
4 R512	2008-000301	R-FUSIBLE(S);56ohm,5%,2W,AF,TP,3.9x10mm	
4 R308	2008-001076	R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm	
△ 4 CR405S	2201-000132	C-CERAMIC,DISC;100PF,10%,500V,Y5P,6X3MM,	
4 C601	2201-000304	C-CERAMIC,DISC0.001nF,0.25pF,50V,NP0,TP	
4 C602	2201-000304	C-CERAMIC,DISC0.001nF,0.25pF,50V,NP0,TP	
4 C801	2201-000332	C-CERAMIC,AC;CK45PTAPGE250V222	
4 C802	2201-000332	C-CERAMIC,AC;CK45PTAPGE250V222	
4 C823	2201-000370	C-CERAMIC,DISC;220PF,10%,50V,Y5P,TP	
4 C408	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	
4 C411	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	
4 C413	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	
4 C818	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	
4 C208	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NP0	
4 C210	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NP0	
4 C403	2201-000599	C-CERAMIC,DISC;560PF,10%,500V,	
4 C816	2201-000599	C-CERAMIC,DISC;560PF,10%,500V,	
4 C405	2201-000639	C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-,5MM,T	

Loc. No.	Code No.	Description ; Specification	Remark
4 C508	2201-000723	C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5	
4 CW04	2201-000982	C-CERAMIC,DISC;10NF,+80-20%,50	
4 C820	2201-000991	C-CERAMIC,HIC;CK45(T)B2KV561-K	
4 C302	2201-002103	C-CERAMIC,DISC;0.015nF,5%,500V,NP0,TP,6.	
4 C505	2202-000106	C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP	
4 C110	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C120	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	
4 C603	2202-000286	C-CERAMIC,MLC-AXIAL;56PF,5%,50	
4 C629	2202-000286	C-CERAMIC,MLC-AXIAL;56PF,5%,50	
4 C223	2202-000252	C-CERAMIC,MLC-AXIAL;4.7nF,10%,50V,X7R,TP	
4 C205	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C242	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C243	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C605	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50	
4 C221	2202-000849	C-CERAMIC,MLC-AXIAL;18pF,5%,50V,CH,TP,3.	
4 C613	2301-000108	C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M	
4 C622	2301-000108	C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M	
4 C630	2301-000111	C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M	
4 C634	2301-000111	C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M	
4 C623	2301-000192	C-FILM,PEF;1NF,5%,50V,5.3X10MM	
4 C624	2301-000192	C-FILM,PEF;1NF,5%,50V,5.3X10MM	
4 C806	2301-000204	C-FILM,PEF;2.7NF,5%,50V,7.4X3.9	
4 C245	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 C805	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 C824	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 CE02	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4 C625	2301-000232	C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4 C626	2301-000232	C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4 CE04	2301-000232	C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4 C301	2301-000254	C-FILM,PEF;39NF,5%,50V,7.5X3.5X5.5MM,5MM	
4 C235	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4 CE03	2301-000342	C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
4 C102	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4 C401	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4 C621	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4 C237	2301-000445	C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4 C414	2301-001065	C-FILM,MPPF;47NF,55,630V,TP,19	
△ 4 CR407S	2301-001258	C-FILM,PPF;39nF,5%,400V,TP,19.5x9x15,7.5	
4 C504	2301-001259	C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
4 C808	2301-001435	C-FILM,PPF;1.5nF,5%,1.2KV,TP,15x8x12.5mm	
4 C306	2305-000149	C-FILM;CF922N100VT104-J-40/105	
4 C305	2305-000285	C-FILM,MPEF;220NF,5%,100V,-,5MM	
4 C213	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C225	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C231	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C236	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C214	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C215	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C216	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C217	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM	
4 C404	2305-000382	C-FILM,MPEF;4.7NF,5%,400V,TP,-,5MM.	
4 C204	2305-000412	C-FILM,MPEF;470NF,5%,63V,-,5MM	
4 C218	2305-000412	C-FILM,MPEF;470NF,5%,63V,-,5MM	
4 C105	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C206	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C209	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C219	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C222	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C232	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C240	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C253	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C606	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C618	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C632	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C807	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C812	2305-000665	C-FILM;104J, 60V,5MM TAPING	
4 C244	2309-000138	C-FILM,PE-PPF;100NF,5%,50V,TP,	
4 C608	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4 C609	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4 C610	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4 C611	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4 C710	2401-002075	C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4 C822	2401-000262	C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4 C207	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	
4 C211	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	
4 C220	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	
4 C226	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	C227	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	4	L302	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.
4	C233	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	4	L303	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.
4	C402	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	4	L402	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.
4	C604	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	4	L801	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.
4	C619	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	4	L802	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.
4	C811	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5	4	L804	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.
4	C304	2401-000326	C-AL;100UF,20%,35V,GP,8X11MM,5	4	L806	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.
4	C303	2401-000365	C-AL;100UF,20%,50V,WT,TP,10x12.5mm,	4	L809	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,
4	C506	2401-000430	C-ELECTROLYTIC;CE04WTAPG250V10	△	FD802S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M
4	C104	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	△	FD801S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO
4	C239	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	4	F801A	3602-000114	FUSE-HOLDER;-,-,30MOHM
4	C614	2401-000480	C-AL;10UF,20%,50V,GP,5X11MM,5M	4	F801B	3602-000114	FUSE-HOLDER;-,-,30MOHM
4	C607	2401-000493	C-AL;10UF,20%,50V,WT,5X11MM,5M	4	C203	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C616	2401-000493	C-AL;10UF,20%,50V,WT,5X11MM,5M	4	C502	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C617	2401-000493	C-AL;10UF,20%,50V,WT,5X11MM,5M	4	C503	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C627	2401-000493	C-AL;10UF,20%,50V,WT,5X11MM,5M	4	J101	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C809	2401-000493	C-AL;10UF,20%,50V,WT,5X11MM,5M	4	J102	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C238	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	4	J103	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	CW01	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	4	J105	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	CW02	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	4	J106	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	CW03	2401-000603	C-AL;1UF,20%,50V,GP,5X11MM,5MM	4	J107	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C224	2401-000660	C-ELECTROLYTIC;CE04WTAPG50V2.2	4	J108	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C234	2401-000660	C-ELECTROLYTIC;CE04WTAPG50V2.2	4	J109	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C412	2401-000927	C-AL;22UF,20%,250V,GP,13X20MM,	4	J110	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C101	2401-000962	C-AL;22UF,20%,50V,GP,TP,5x11.5	4	J201	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C212	2401-000962	C-AL;22UF,20%,50V,GP,TP,5x11.5	4	J202	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C615	2401-001026	C-AL;3.3UF,20%,50V,GP,5X11MM,5	4	J203	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C620	2401-001026	C-AL;3.3UF,20%,50V,GP,5X11MM,5	4	J204	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C804	2401-001192	C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	4	J205	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C507	2401-001232	C-AL;4.7UF,20%,250V,GP,10X12.5	4	J210	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C409	2401-001397	C-AL;470UF,20%,25V,GP,10X16MM,	4	J211	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C410	2401-001397	C-AL;470UF,20%,25V,GP,10X16MM,	4	J212	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C612	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11.5	4	J215	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	CW05	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11.5	4	J217	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C633	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11.5	4	J219	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C635	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11.5	4	J220	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C817	2401-002215	C-AL;2200UF,20%,25V,(105RD)13X	4	J221	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C407	2401-002268	C-ELEC;CE04-40/105250VTR2-R2-MWR	4	J222	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C825	2401-002300	C-ELECTROLYTIC;CE04WTAPG50V47U	4	J223	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C103	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5.5	4	J224	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C813	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11.5.5	4	J225	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11.5	4	J228	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C810	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11.5	4	J231	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C814	2401-003028	C-AL;100UF,20%,25V,WT,TP,6.3X1	4	J232	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C815	2401-003028	C-AL;100UF,20%,25V,WT,TP,6.3X1	4	J233	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C631	2401-003139	C-AL;1000UF,20%,25V,WT,TP,10*2	4	J234	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C819	2401-003139	C-AL;1000UF,20%,25V,WT,TP,10*2	4	J236	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L101	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J237	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L205	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J240	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L206	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J249	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L603	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J250	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	LE01	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J251	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L707	2701-000127	INDUCTOR-AXIAL;15UH,10%,2.5X3.	4	J252	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L210	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J253	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L211	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J255	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
△	L401	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J256	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L604	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J257	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L605	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J274	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L212	2701-000158	INDUCTOR-AXIAL;22UH,10%,2.5X3.	4	J279	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L209	2701-000159	INDUCTORAXIAL;22uH,10%,4.2x9.8mm	4	J285	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L803	2701-000159	INDUCTORAXIAL;22uH,10%,4.2x9.8mm	4	J290	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L601	2701-000169	INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	4	J292	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L602	2701-000169	INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	4	J293	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L202	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	4	J294	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L203	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	4	J295	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L230	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	4	J302	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L204	2702-000142	INDUCTOR-RADIAL;22uH,5%,6x6.4mm	4	J304	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	X601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	4	J305	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	X201	2801-003433	CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	4	J306	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
△	L403	2901-000297	FILTER-EMI ON BOARD;-;3A,-,-,3.5x5,TP,-	4	J307	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L407	2901-000297	FILTER-EMI ON BOARD;-;3A,-,-,3.5x5,TP,-	4	J308	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L501	2901-000297	FILTER-EMI ON BOARD;-;3A,-,-,3.5x5,TP,-	4	J403	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L805	2901-000297	FILTER-EMI ON BOARD;-;3A,-,-,3.5x5,TP,-	4	J404	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	R816	2901-000297	FILTER-EMI ON BOARD;-;3A,-,-,3.5x5,TP,-	4	J405	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	LE02	2901-000297	FILTER-EMI ON BOARD;-;3A,-,-,3.5x5,TP,-	4	J407	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	Z202	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,-,TP,-	4	J408	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J235	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J409	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A





Loc. No.	Code No.	Description ; Specification	Remark
4	EY844	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY845	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY848	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY850	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY851	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY855	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY856	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY857	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY858	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY859	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY862	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY863	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY864	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY865	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EY866	AA60-40011A EYELET;-ID2.0,OD2.8,-,-,BST	
4	EL401	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL402	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL403	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL404	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL405	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL406	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL407	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL501	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL502	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL805	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL806	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL807	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	EL808	AA60-40011B EYELET;-ID2.2,OD3.2,-,-,BSP	
4	GT102	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT404	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT502	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT503	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	R256	2004-000433 R-METAL;1KOHM,1%,1/8W,AA,TP,1	
4	R609	2001-000411 R-CARBON;18KOHM,5%,1/8W,AA,TP	
4	R611	2001-000411 R-CARBON;18KOHM,5%,1/8W,AA,TP	
4	R418	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP	
4	CE01	2401-002597 C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
4	DE03	0403-001325 DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
4	RE02	2001-001178 R-CARBON(S);680OHM,5%,1/2W,AA	
4	RE05	2004-001397 R-METAL(S);4.7KOHM,1%,1/2W,AA	
4	RE09	2008-001018 R-FUSIBLE(S);0.47OHM,10%,2W,AF	
4	RE10	2004-004048 R-METAL(S);3.9Kohm,1%,1/2W,AA,TP,2.5x6.5	
4	R516	2008-000206 R-FUSIBLE(S);10HM,5%,1/2W,AF,TP	
4	R718	2001-000515 R-CARBON;220OHM,5%,1/8W,AA,TP	
4	C709	2202-000806 C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
3	C406	2301-001296 C-FILM,MPPF;720NF,5%,400V,BK,26X15.5X20M	
2	A/SIDE	AA96-01156A ASSY MISC,A/V SIDE,CFT2791KX/SMS;K57A	
3	R701	2001-000028 R-CARBON(S);100OHM,5%,1/2W,AB	
3	R702	2001-000028 R-CARBON(S);100OHM,5%,1/2W,AB	
3	C701	2202-000121 C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
3	C702	2202-000121 C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
3	C703	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3	
3	C704	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3	
3	C705	2401-002009 C-AL;100UF,20%,16V,GP,TP,6.3X7	
3	C706	2401-002009 C-AL;100UF,20%,16V,GP,TP,6.3X7	
3	L701	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3	
3	L702	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3	
3	L703	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3	
3	L704	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3	
3	L707	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6	
3	L708	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6	
3	00VER	AA41-00345A PCB-SIDE A/V;CS29K1,FR-1,1L,A,1.6T,245x2	
3	JH701	3722-000143 JACK-PHONE;1P,3.4MM,-,MBAG	
3	JA701	3722-001031 JACK-RCA;3P,3.6MM,#18,AU	
3	CN704	AA39-00070A LEAD CONNECTOR-ASSY;4P,200mm,YBNH250-04,	

Loc. No.	Code No.	Description ; Specification	Remark
3	CN701	AA39-20068E LEAD CONNECTOR-ASSY;-YBNH025-08,67096-0	
3	CN703	AA39-20069C LEAD CONNECTOR-ASSY;5P,YBNH025-05,67096	
3	BAND	AA63-10002A BAND-TIE;-NYLON66V2,-,-,L100,NTR,-,-	

## ASSY COVER FRONT

1	A/CFRN	AA90-04432A	ASSY COVER FRONT;25M6,G4309,K57A,HIPS,HB
2	PC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	AV+CF	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZP
2	BRAC+C	6002-000522	SCREW-TAPPING;TH,+,2,M4,L15,ZP
2	SPK+CF	6006-001095	SCREW-ASSY TAPT;WPBH,+,M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050V	SCREW-ASSY;WC,HH,+,M6,L30,SWRCH18A,ZPC(S
2	S/CRT	AA61-00813B	SUPPORT-CRT;25M6,29M6,HIPS,HB,NATURL
2	BRAC	AA61-10053A	BRACKET-CRATER;-7277,STS304,T0.5,-,-
2	F/C	AA64-03221A	CABINET FRONT;25M6,HIPS,HB,G4309,K57A
3	KC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	WR+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	HOLDER	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO
3	SPRING	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,OD6,H
3	CC	AA63-00489B	COVER-CONTROL;25M6,ABS,HB,WHT,SVM6145+CL
3	KP	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11
3	KC	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10
3	WRL	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR
3	DP	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV
2	BADGE	AA64-70117B	BADGE-BRAND;-AL,-,-,L65,R2000,SILVER,SS
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	R/CAP	AA73-00005B	RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT
2	A/HSPK	AA91-00507A	ASSY HOLDER SPK;-,-,80HM/15W,-,ASSY HOLD
2	A/CTRL	AA96-01189A	ASSY PCB P-CONTROL,CL21M6WKX;K57A
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
3	RY03	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
3	RY06	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP
3	RY02	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
3	RY05	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
3	RY01	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP
3	RY04	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP
3	RY07	2001-000793	R-CARBON;470HM,5%,1/8W,AA,TP,1
3	RY08	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm
3	JY01	3812-000219	JUMPER-WIRE-SQ,COPPER;TA0.6SN/52M/M(A
3	00VER	AA41-00709A	PCB-QUEST CONTROL;TXM2792FX,FR-1,1L,A,1.
3	SW07	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY02	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY03	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY04	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY05	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY06	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	CY01	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11.5
3	LDY02	0601-000465	LED;ROUND,GRN,5mm,565
3	RMV01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES
3	CNY01	AA39-00100C	LEAD CONNECTOR-ASSY;4P,YBNH250-04,35155
3	CNY02	AA39-20005A	LEAD-CONNECTOR,ASSY;-YBNH025-03,67096-0
3	BAND	AA63-10002A	BAND-TIE;-NYLON66V2,-,-,L100,NTR,-,-
2	R-CAP	0203-001290	TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50
2	CWFC	AA65-00011C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,25M
2	CWFC	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	DRESSP	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL

## ASSY COVER REAR

1	A/REAR	AA90-01757A	ASSY COVER REAR;CL25M6W7X/XAX
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	TER+RK	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA63-60001X	SPACER-FELT;FELT,T0.5,330X15MM
2	B/C	AA64-02098C	CABINET-BACK;25M6,HIPS,HB,G4309
2	AC+BC	AA65-30008A	CLAMP-CORD;-PE,HB,BLK,-
2	H/T	AA61-00356B	HOLDER-TUNER,F/JACK;-501F,ABS,HB,BLK,-
2	FBT	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL
2	YUGO	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL
2	DRES/A	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

### ASSY LABEL

1	A/LABE	AA92-02726A	ASSY LABEL;CL25M6W7X/XAX
2	INLAYB	AA64-00892G	INLAY BACK;D2,D3,RCA9P+S-VHS+DVD,PS SHEE
2	IN/AV	AA64-01506C	INLAY-AV;29K3,PVC-SHEET,T0.3,-,P/GRAY,-
2	L/RAT	AA68-01546A	LABEL RATING;TETRONEPAPER90(S)N,SEM

### ASSY BOX

1	A/BOX	AA92-07430A	ASSY BOX;25M6,K57A,25
2	L/BN	AA68-01793A	LABEL;BOX & NOM,WTH,PAPER,MEX & TIJ
2	PCK	AA69-02037A	PACKING CASE;25M6,K57A,CB D-3 AB,YEL,A1,

### ASSY P/MATERIAL

1	A/PACK	AA92-02775A	ASSY P/MATERIAL;CL25M6W7X/XAX
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2	PE-BAG	AA69-01209A	BAG;SHEET,25-27,W54,L60,FOAM,OEM.
2	C/SET	AA69-01264B	CUSHION-SET;25M6,EPS C=0.02

### ASSY CPT

1	A/CPT	AA91-05989A	ASSY CPT;A59QDF891X999,+380MG,1.05MH
△ 2	CRT	AA03-00322A	CRT COLOR;A59QDF891X999,+380MG,1.05MH,1.
2	DCOIL	AA27-00262A	COIL DEGAUSSING;25INCH F,10%,45TS,4.50H
2	S/CRT	AA60-00038A	SPACER-CRT;PS,SHEET,T1.0,BLK,OD22,ID10.
2	CDCOIL	AA65-30017A	CLAMP-D,COIL;- ,NYLON-66,V0,NTR,DADH300,2
2	CDCOIL	AA65-30113A	CLAMP-D,COIL;NYLON66,V2,BLK,TVI25-29,-
2	A/TBC	AA98-70008B	ASSY-TBC,WIRE(P);-,TVI 25',NTSC,2P-WH,-

### ASSY ACCESSORY

1	A/ACCE	AA92-07391A	ASSY ACCESSORY;K57A,25,SEM
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	BATT	4301-000120	BATTERY-MN;1.5V,-,AA
2	C/RCA	AA39-40001B	PATCH-CORD;3P-3P1500MMRED,WHT,YEL,500
2	RMT	AA59-00141A	REMOCON;- ,TM58,SSM174PT,41,SS,L/GRAY,M
2	M/SERV	AA68-00501A	MANUAL-SERVICE;-,-,WHT,ALL MEX&TIJ.
2	C/WARR	AA68-00559C	CARD WARRANTY;- ,W/P150(G);-,138X212,-,
2	I/B1	AA68-02711A	MANUAL USERS;SPA,K57A,W/P100(G)
2	L/CONS	AA68-01574A	LABEL;CONSIGN-REEXPL,W;3,1/2; 1,15
2	T/REG	AA68-01585A	CARD;REGISTRATION,8.5X11,80GL,MEX
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPETO.012,93/4X151

## 7-2 CL25M6WKX/XAP

Loc. No.	Code No.	Description ; Specification	Remark
<b>ASSY CHASSIS</b>			
1	A/CHAS	AA91-05969A	ASSY CHASSIS;25,LATIN,K57A,CL25M6,S-VHS
2	A/MAIN	AA94-12389A	ASSY PCB MAIN;25,LATIN,K57A,CL25M6,S-VH
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3.63/37
3		0202-000187	SOLDER-WIREFLUX;-,RS60S,D1.2.6
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0204-001024	FLUX;DF-96TVS,-,20%,
△ 3	D801S	0402-001160	DIODE-BRIDGE;D5SB60,600V,2.8A,SIP-4,ST
3	D404	0402-001296	DIODE-RECTIFIER;FMP-3FU,1500V,5A,TO-3PF
△ 3	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW
3	ICW01	1001-000211	IC-VIDEO SWITCH;NJM2235D,-,DIP,8P,300MIL
3	IC202	1103-001200	IC-EEPROM;M24C08-WBN6,1024x8Bit,DIP,8P3
3	IC601	1204-001662	IC-SOUND PROCESSOR;MSP3425G-B7,DIP,52P,5
△ 3	NT801S	1404-001045	THERMISTOR NTC;4.7OHM,15%,2900K,35.0MW,T
△ 3	PT801S	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V
△ 3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-MIT
△ 3	CR403S	2306-000255	C-FILM;CF922P1.6KV742-HBUP
△ 3	CX801S	2306-000318	C-FILM,MPPF;220NF,20%,250V,-,2
△ 3	CR406S	2306-001017	C-FILM,MPPF;680NF,5%,400V,26X1
3	C803	2401-001426	C-AL;470UF,400V
3	C821	2401-003633	C-AL;220UF,20%,160V,GP,ST,22X25MM,1
△ 3	SF101S	2904-001107	FILTER-SAW AV;45.75MHz,SIP5K,TP,12.6dB,N
△ 3	SF102S	2904-001418	FILTER-SAW AV;45.75MHz,-,ST,-,-
△ 3	RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO
△ 3	FP801S	3601-000293	FUSE-CARTRIDGE;250V,5A,SLOW-BLOW,GLASS,5
△ 3	V999S	3704-001105	SOCKET-CRT;11P20PI,26.5PI,NL,-
3	JA701	3722-001333	JACK-RCA9P3.2mm,NL,BLK
△ 3	IC201S	AA09-00316A	IC MICOM;TDA9592PS/N1/3I,SPM-464A,64P,3
△ 3	T444S	AA26-00057A	TRANS-FBT;-,FUH-29A001B(S),25/29,130
△ 3	T801S	AA26-00179C	TRANS SWITCHING;EER4950,K57A,CFT2791KX,9
△ 3	T401A	AA26-50001M	TRANS HORIZ DRIVE;-,80MH,520UH,4UH,E
3	L808	AA27-00098A	COIL CHOKE;-,24uH,10%,-,0.1,3.0A,DR10X
3	L409	AA27-00056A	COIL HORIZ. WIDTH;-,600uH,YL9N 15x27.5 C
△ 3	LX801S	AA29-00011A	FILTER LINE NOISE;CZ32W8,-,0.20MAX,1.5KV
3	WG	AA39-20010B	LEAD-CONNECTOR,ASSY;-,YFH800-01,500MM,1P
3	CN503	AA39-20604A	LEAD CONNECTOR-ASSY;-,YBNH250-09,YBNH05/
△ 3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
3	CN603	3711-002644	POST-HEADER;67094-005(AUTO)
3	CN701	3711-002647	POST-HEADER;67094-008(AUTO)
3	Q801	0502-000242	TR-POWER;KSA614,PNP,-80V,-55V,
3	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,150V,1
3	Q401	AA96-00624A	ASSY H/S;-,POWER,AA62-00057A,KSD5703,WA
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0502-001136	TR-POWER;KSD5703,NPN,70W,TO-3PF,ST,8-
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA60-30001A	WASHER-PLATE;-,M3,ID3.5,15X8.5,T1.0,-,SB
4		AA62-00057A	HEAT SINK-PS;-,T1.0,-,41*20*60,D2,-,-
4	IC501	AA96-50311A	ASSY H/S;-,VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	ICVIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-,SECC,T1.0,-,33X15X30FT-2
△ 3	IC802	AA96-00245A	ASSY H/S;-,AA62-00055A,KA7632,-
4		1203-001939	IC-POS.FIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-,T1.0,-,35*15*25,D1,-,-
△ 3	IC801S	AA96-50373K	ASSY H/S;-,POWER,AA62-30181K,K57A
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-002597	IC-PWM CONTROLLER;KA5Q1265RF-YDTU,TO-3PF
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA61-11028A	BRACKET-IC;SECC,T1.0,-,
4		AA62-30181K	HEATSINK-ES;-,A6063EXTR,-,2,WHT,40MM,-
3	IC602	AA96-50398A	ASSY H/S;-,AA62-30182E,TDA7297,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001064	IC-POWERAMP;7297,ZIP,15P,-,DUA
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30182E	HEAT-SINK,ES;-,A6063 EXTR,-,WHT,-,-,40
3	IC301	AA96-50406A	ASSY H/S;LA62-30180K,LA7845
4		1204-000517	IC-LINEAR;LA7845SIPVERTICALAMP
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30180K	HEATSINK-ES;-,A6063EXTR,-,WHT,50/13,-,

Loc. No.	Code No.	Description ; Specification	Remark
△ 3	D805	BP96-00020F	ASSY HEAT SINK P;H/S TR,SCREW,FFPF10U20S
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001375	DIODE-RECTIFIER;FFPF10U20S,200V,10A,TO-2
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-,T1.0,-,DREAM,-,-,-,-
△ 3	D808	BP96-00020J	ASSY HEAT SINK P;H/S TR,SCREW,FMG-G2CS,O
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001230	DIODE-RECTIFIERFMG-G2CS,1000V,3A,TO-22
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-,T1.0,-,DREAM,-,-,-,-
△ 3	PWR/AC	AA96-20109C	ASSY PWR-CORD;CP2/NQ(4.0)H/C300,KKP419C,
4		AA39-10006X	POWER-CORD;-,KKP419C,KLCE-2F,2.286MT
4		AA61-20284A	HOLDER P CORD;PPV0,BLK,KE-002
3	L/PQS	AA68-01018A	LABEL-POS;-,50mmX,13,-,WHITE,-
3	CN901	3711-002642	POST-HEADER;67094-003(AUTO)
3	CN902	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
△ 3	CR402S	2306-000357	C-FILM,MPPF;8.2nf,5%,1.6KV,BK,20x9.5x17.
△ 3	LR401S	AA27-00099A	COIL LINEARITY;23.5uH,23.5uH,DR14x15C-5.
3	QE01	0505-000156	FET-SILICON;IRF620,N,200V,5A,0.8ohm,50W,
3	L405	AA27-00057A	COIL HORIZ. WIDTH;-,10mH,YL-9N 15x27.5 C
3	ICE01	1202-000103	IC-VOLTAGECOMP;393,DIP,8P,300MIL,DUAL,
3	JA702	3722-001423	JACK-RCA;3P+51P,3.4mm,NL,BLK,-
3	A/AUTO	AA97-13616A	ASSY AUTO;25,K57A,CL25M6,S-VHS+DVD
4	D202	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D206	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D304	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D809	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	DZ403	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	DE01	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D408	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D802	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
△ 4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D504	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-204A
4	D402	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D951	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△ 4	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1
4	D405	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D406	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	DE04	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D303	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1
4	D407	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1
4	D409	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1
4	DE02	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1
4	D501	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	DZ101	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ204	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ213	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ214	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ215	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ602	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ805	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ812	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ802	0403-000699	DIODE-ZENER;TZP27B,27V,27-30.8
4	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ811	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ803	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ206	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ209	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ210	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ211	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500

Loc. No.	Code No.	Description ; Specification	Remark
4	DZ212	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ218	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ220	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ221	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ222	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ223	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ224	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ501	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ502	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ503	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ808	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ208	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ216	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ217	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ219	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ801	0403-001211 DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
4	DZ303	0403-001221 DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
4	DZ804	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
4	DZ301	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ305	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ302	0403-001329 DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,	
4	DZ810	0403-001373 DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D	
4	D602	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	D201	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	Q205	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q206	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q211	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q301	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q702	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q951	0501-000369 TRANSISTOR;KSC2331-Y(TAPG)	
4	Q203	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q204	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q207	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q208	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q802	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q701	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	IC603	1203-000515 IC-VOL DETECTOR;7042,TO-92,3P,177MIL,PL	
4	IC803	1203-001217 IC-POST,ADJUSTREG;431,TO-92,3P,4.58MIL,P	
4	VX801S	1405-000187 VARISTOR;750V,1250A,12.5x7mm,TP	
4	R231	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP	
4	R289	2001-000011 R-CARBON;75Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R306	2001-000016 R-CARBON(S);10HM,5%,1/2W,AA,TP	
4	R806	2001-000019 R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
4	R405	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R817	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R809	2001-000109 R-CARBON(S);470OHM,5%,1/2W,AA,	
4	R316	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	J708	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R712	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R713	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R103	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R202	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R210	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R211	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R212	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R214	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R215	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R219	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R220	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R272	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R273	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R274	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R275	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R276	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R277	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R288	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R296	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R504	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R505	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R506	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R605	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R606	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R607	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R608	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R613	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R614	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	

△  
△

Loc. No.	Code No.	Description ; Specification	Remark
4	RW01	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	RW02	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	RW04	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	RW05	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	RE07	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	RW03	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP	
4	R206	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R213	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R258	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R315	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R615	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R618	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R619	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R813	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R822	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R835	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	RE03	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R248	2001-000343 R-CARBON;130OHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	J213	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R207	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R617	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	RE01	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R717	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R292	2001-000012 R-CARBON;680Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R260	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R261	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R314	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R833	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R251	2001-000490 R-CARBON;200OHM,5%,1/8W,AA,TP	
4	R279	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP	
4	R716	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP	
4	R101	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	R102	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	R250	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	R719	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	R228	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R229	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R814	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R245	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	RE04	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	R401	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP	
4	R270	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP	
4	R271	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP	
4	R216	2001-000645 R-CARBON;330KOHM,5%,1/8W,AA,TP	
4	R203	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R208	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R209	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R223	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R230	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R236	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R293	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R294	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R829	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RE08	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R221	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R222	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R601	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R602	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R603	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R104	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP	
4	R714	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP	
4	R246	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4	R217	2001-000857 R-CARBON;560OHM,5%,1/8W,AA,TP	
4	R610	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	R612	2001-000890 R-CARBON;6.8KOHM,5%,1/8W,AA,TP	
4	R136	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R105	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R708	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R711	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R247	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R705	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R706	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R707	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R709	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	R710	2001-000969	R-CARBON;750HM,5%,1/8W,AA,TP,1	4	C223	2202-000252	C-CERAMIC,MLC-AXIAL;4.7nF,10%,50V,X7R,TP
4	R514	2001-001062	R-CARBON(S);10MOHM,5%,1/2W,AA,	4	C205	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50
4	R812	2001-001067	R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4	4	C242	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50
4	R402	2001-001077	R-CARBON(S);1500HM,5%,1/2W,AA,	4	C243	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50
4	R823	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	4	C605	2202-000796	C-CERAMIC,MLC-AXIAL;1NF,10%,50
4	R824	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	4	C221	2202-000849	C-CERAMIC,MLC-AXIAL;18pF,5%,50V,CH,TP,3.
4	R828	2001-001088	R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	4	C613	2301-000108	C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M
4	R404	2001-001114	R-CARBON(S);2700HM,5%,1/2W,AA,	4	C622	2301-000108	C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M
4	R825	2001-001131	R-CARBON(S);33KOHM,5%,1/2W,AA,	4	C630	2301-000111	C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M
4	R803	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA	4	C634	2301-000111	C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M
4	R804	2001-001150	R-CARBON(S);470KOHM,5%,1/2W,AA	4	C623	2301-000192	C-FILM,PEF;1NF,5%,50V,5.3X10MM
4	R827	2001-001168	R-CARBON(S);6.8KOHM,5%,1/2W,AB	4	C624	2301-000192	C-FILM,PEF;1NF,5%,50V,5.3X10MM
4	R807	2001-001170	R-CARBON(S);6.8OHM,5%,1/2W,AB,	4	C806	2301-000204	C-FILM,PEF;2.7NF,5%,50V,7.4X3.
4	R808	2001-001170	R-CARBON(S);6.8OHM,5%,1/2W,AB,	4	C245	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9
4	R810	2001-001192	R-CARBON(S);820OHM,5%,1/2W,AB,	4	C805	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9
4	R403	2001-001079	R-CARBON(S);15OHM,5%,1/2W,AB,T	4	C824	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9
4	R501H	2002-001009	R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7	4	CE02	2301-000224	C-FILM,PEF;22NF,5%,50V,7.4X3.9
4	R502H	2002-001009	R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7	4	C625	2301-000232	C-FILM,PEF;3.3NF,5%,50V,8.1X4.
4	R511	2002-001009	R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7	4	C626	2301-000232	C-FILM,PEF;3.3NF,5%,50V,8.1X4.
△	RY801S	2002-001012	R-COMPOSITION;8.2MOhm,5%,1/2W,AA,TP,3.7X	4	CE04	2301-000232	C-FILM,PEF;3.3NF,5%,50V,8.1X4.
4	R313	2003-000537	R-METALOXIDE(S);1KOHM,5%,1W,AD	4	C301	2301-000254	C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM
4	R408	2003-000540	R-METALOXIDE(S);1KOHM,5%,2W,AD	4	C235	2301-000342	C-FILM,PEF;2.2nf,5%,50V,TP,7.4x3.9x13mm,
4	R801	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	4	CE03	2301-000342	C-FILM,PEF;2.2nf,5%,50V,TP,7.4x3.9x13mm,
4	R802	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	4	C102	2301-000383	C-FILM,PEF;10nf,5%,50V,TP,6x7x3.2mm,5mm
4	R830	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	4	C401	2301-000383	C-FILM,PEF;10nf,5%,50V,TP,6x7x3.2mm,5mm
4	R831	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	4	C621	2301-000383	C-FILM,PEF;10nf,5%,50V,TP,6x7x3.2mm,5mm
4	R841	2003-000586	R-METALOXIDE(S);22KOHM,5%,2W,A	4	C237	2301-000445	C-FILM,PEF;4.7nf,5%,50V,TP,5.5x7x3mm,5mm
4	R818	2003-000998	R-METALOXIDE;300OHM,5%,2W,AF,T	4	C414	2301-001065	C-FILM,MPPF;47NF,55,630V,TP,19
4	R832	2003-001035	R-METALOXIDE(S);27OHM,5%,2W,AF	△	CR407S	2301-001258	C-FILM,PPF;39nf,5%,400V,TP,19.5x9x15,7.5
4	R419	2003-001040	R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1	4	C504	2301-001259	C-FILM,MPPF;100nf,5%,400V,TP,19x8x16,7.5
4	R423	2003-002007	R-METAL OXIDE(S);4.7KOHM,5%,2W,AF,TP,3.9	4	C808	2301-001435	C-FILM,PPF;1.5nf,5%,1.2kV,TP,15x8x12.5mm
4	R407	2003-002008	R-METAL OXIDE(S);18KOHM,5%,2W,AF,TP,3.9X	4	C306	2305-000149	C-FILM;CF922N100VT104-J-40/105
4	R819	2003-002064	R-METALOXIDE;7.5OHM,5%,2W,AF,T	4	C305	2305-000285	C-FILM,MPEF;220NF,5%,100V,-,5M
4	R820	2003-002064	R-METALOXIDE;7.5OHM,5%,2W,AF,T	4	C213	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
4	R821	2003-002064	R-METALOXIDE;7.5OHM,5%,2W,AF,T	4	C225	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
4	R309	2003-002150	R-METAL OXIDE;270OHM,5%,2W,AG,TP,6X16MM	4	C231	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
4	R310	2003-002150	R-METAL OXIDE;270OHM,5%,2W,AG,TP,6X16MM	4	C236	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
4	R305	2004-001371	R-METAL(S);1.5KOHM,1%,1/2W,AA,	4	C214	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
4	R307	2004-001371	R-METAL(S);1.5KOHM,1%,1/2W,AA,	4	C215	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
4	R834	2004-001889	R-METAL(S);127KOHM,1%,1/2W,AA,TP,2.5X6.5	4	C216	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
△	RR401S	2004-001390	R-METAL(S);1KOHM,2%,1/2W,AA,TP	4	C217	2305-000289	C-FILM,MPEF;220NF,5%,63V,-,5MM
4	R416	2004-001402	R-METAL(S);6.8KOHM,1%,1/2W,AA,	4	C404	2305-000382	C-FILM,MPEF;4.7NF,5%,400V,TP,-,5MM.
4	R420	2001-001073	R-CARBON(S);130KOHM,5%,1/2W,AA,TP,2.4X6.	4	C204	2305-000412	C-FILM,MPEF;470NF,5%,63V,-,5MM
4	R417	2001-001073	R-CARBON(S);130KOHM,5%,1/2W,AA,TP,2.4X6.	4	C218	2305-000412	C-FILM,MPEF;470NF,5%,63V,-,5MM
4	R280	2004-001914	R-METAL;39KOHM,2%,1/8W,AA,TP,1	4	C105	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R826	2004-001983	R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4	4	C206	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R815	2008-000205	R-FUSIBLE(S);100HM,5%,1/2W,AF,	4	C209	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R413	2008-000253	R-FUSIBLE(S);0.47OHM,5%,1W,AF,	4	C219	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R414	2008-000253	R-FUSIBLE(S);0.47OHM,5%,1W,AF,	4	C222	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R312	2008-001013	R-FUSIBLE(S);1.2ohm,5%,2W,AF,TP,3.9x10mm	4	C232	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R513	2008-001133	R-FUSIBLE(S);0.75ohm,5%,AF,TP,3.9x10mm	4	C240	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R512	2008-000301	R-FUSIBLE(S);56ohm,5%,2W,AF,TP,3.9x10mm	4	C253	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	R308	2008-001076	R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm	4	C606	2305-000665	C-FILM;104J, 60V,5MM TAPING
△	CR405S	2201-000132	C-CERAMIC,DISC;100PF,10%,500V,Y5P,6X3MM,	4	C618	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	C601	2201-000304	C-CERAMIC,DISC0.001nf,0.25pF,50V,NP0,TP	4	C632	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	C602	2201-000304	C-CERAMIC,DISC0.001nf,0.25pF,50V,NP0,TP	4	C807	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	C801	2201-000332	C-CERAMIC,AC;CK45PTAPGE250V222	4	C812	2305-000665	C-FILM;104J, 60V,5MM TAPING
4	C802	2201-000332	C-CERAMIC,AC;CK45PTAPGE250V222	4	C244	2309-000138	C-FILM,PE-PPF;100NF,5%,50V,TP,
4	C823	2201-000370	C-CERAMIC,DISC;220PF,10%,50V,Y5P,TP	4	C608	2401-002075	C-AL;4.7uf,20%,50V,GP,TP,5x11.5mm
4	C408	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	4	C609	2401-002075	C-AL;4.7uf,20%,50V,GP,TP,5x11.5mm
4	C411	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	4	C610	2401-002075	C-AL;4.7uf,20%,50V,GP,TP,5x11.5mm
4	C413	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	4	C611	2401-002075	C-AL;4.7uf,20%,50V,GP,TP,5x11.5mm
4	C818	2201-000556	C-CERAMIC,DISC;470PF,10%,500V,	4	C710	2401-002075	C-AL;4.7uf,20%,50V,GP,TP,5x11.5mm
4	C208	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NP0	4	C822	2401-000262	C-AL;100UF,20%,160V,GP,16X25MM,5MM,
4	C210	2201-000573	C-CERAMIC,DISC;47PF,5%,50V,NP0	4	C207	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C403	2201-000599	C-CERAMIC,DISC;560PF,10%,500V,	4	C211	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C816	2201-000599	C-CERAMIC,DISC;560PF,10%,500V,	4	C220	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C405	2201-000639	C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-,5MM,T	4	C226	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C508	2201-000723	C-CERAMIC,DISC;4.7nf,20%,3KV,Y5U,TP,16x5	4	C227	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	CW04	2201-000982	C-CERAMIC,DISC;10NF,+80-20%,50	4	C233	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C820	2201-000991	C-CERAMIC,HIC;CK45(T)B2KV561-K	4	C402	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C302	2201-002103	C-CERAMIC,DISC;0.015nf,5%,500V,NP0,TP,6.	4	C604	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C505	2202-000106	C-CERAMIC,MLC-AXIAL;1.5nf,20%,16V,Y5P,TP	4	C619	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C110	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	4	C811	2401-000302	C-AL;100UF,20%,25V,GP,6X11MM,5
4	C120	2202-000127	C-CERAMIC,MLC-AXIAL;10NF,+80-2	4	C304	2401-000326	C-AL;100UF,20%,35V,GP,8X11MM,5
4	C603	2202-000286	C-CERAMIC,MLC-AXIAL;56PF,5%,50	4	C303	2401-000365	C-AL;100uf,20%,50V,WT,TP,10x12.5mm,
4	C629	2202-000286	C-CERAMIC,MLC-AXIAL;56PF,5%,50	4	C506	2401-000430	C-ELECTROLYTIC;CE04WTAPG250V10

Loc. No.	Code No.	Description ; Specification	Remark
4	C104	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C239	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C614	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C607	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C616	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C617	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C627	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C809	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C238	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CW01	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CW02	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	CW03	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C224	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C234	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C412	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C101	2401-000962 C-AL;22uF,20%,50V,GP,TP5x11,5	
4	C212	2401-000962 C-AL;22uF,20%,50V,GP,TP5x11,5	
4	C615	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C620	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C804	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C507	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	C409	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C410	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C612	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11,5	
4	CW05	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11,5	
4	C633	2401-001914 C-AL;1uF,20%,50V,BP,TP5x11,5	
4	C635	2401-001914 C-AL;1uF,20%,50V,BP,TP5x11,5	
4	C817	2401-002215 C-AL;2200UF,20%,25V,(105RD)13X	
4	C407	2401-002268 C-ELEC;CE04-40/105250VTR2R2-MWR	
4	C825	2401-002300 C-ELECTROLYTIC;CE04WTAPG50V47U	
4	C103	2401-002594 C-AL;220uF,20%,16V,GP,TP8x11.5,5	
4	C813	2401-002594 C-AL;220uF,20%,16V,GP,TP8x11.5,5	
4	C229	2401-002619 C-AL;47uF,20%,25V,GP,TP5x11,5	
4	C810	2401-002619 C-AL;47uF,20%,25V,GP,TP5x11,5	
4	C814	2401-003028 C-AL;100UF,20%,25V,WT,TP6.3X1	
4	C815	2401-003028 C-AL;100UF,20%,25V,WT,TP6.3X1	
4	C631	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2	
4	C819	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2	
4	L101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L205	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L206	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L603	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	LE01	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L707	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L210	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L211	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
△	4	L401 2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L604	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L605	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L212	2701-000158 INDUCTOR-AXIAL;22UH,10%,2.5X3.	
4	L209	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L803	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L601	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	
4	L602	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	
4	L202	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L203	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L230	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L204	2702-000142 INDUCTOR-RADIAL;22uH,5%,6x6.4mm	
4	X601	2801-000186 CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
4	X201	2801-003433 CRYSTAL-UNIT;12MHz,30PPM,28-AAM,30pF,300	
△	4	L403 2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L407	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L501	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L805	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	R816	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	LE02	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	Z202	2903-000129 FILTER-CERAMIC;BR,4.5MHz,-,-,TP,-	
4	J235	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L302	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L303	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L402	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L801	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L802	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L804	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L809	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,	
△	4	FD802S 3601-001163 FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	

Loc. No.	Code No.	Description ; Specification	Remark
△	4	FD801S 3601-001228 FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
4	F801A	3602-000114 FUSE-HOLDER;-,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,30MOHM	
4	C203	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	C502	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	C503	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J109	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J201	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J202	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J203	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J204	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J205	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J210	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J211	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J212	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J215	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J217	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J219	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J220	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J221	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J222	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J223	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J224	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J225	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J228	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J231	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J232	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J233	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J234	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J236	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J237	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J240	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J249	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J250	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J251	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J252	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J253	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J255	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J256	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J257	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J274	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J279	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J285	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J290	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J292	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J293	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J294	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J295	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J302	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J304	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J305	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J306	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J307	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J308	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J403	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J404	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J405	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J407	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J408	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J409	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J410	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J413	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J414	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J415	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J416	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J420	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J501	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J502	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	
4	J503	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M/A	

Samsung Electronics



Loc. No.	Code No.	Description ; Specification	Remark
4	EY859	AA60-40011A EYELET; ID2.0,OD2.8,-,-,BST	
4	EY862	AA60-40011A EYELET; ID2.0,OD2.8,-,-,BST	
4	EY863	AA60-40011A EYELET; ID2.0,OD2.8,-,-,BST	
4	EY864	AA60-40011A EYELET; ID2.0,OD2.8,-,-,BST	
4	EY865	AA60-40011A EYELET; ID2.0,OD2.8,-,-,BST	
4	EY866	AA60-40011A EYELET; ID2.0,OD2.8,-,-,BST	
4	EL401	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL402	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL403	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL404	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL405	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL406	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL407	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL501	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL502	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL805	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL806	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL807	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL808	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	GT102	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT404	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT502	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT503	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	R256	2004-000433 R-METAL;1KOHM,1%,1/8W,AA,TP,1	
4	R609	2001-000411 R-CARBON;18KOHM,5%,1/8W,AA,TP,	
4	R611	2001-000411 R-CARBON;18KOHM,5%,1/8W,AA,TP,	
4	R418	2008-000266 R-FUSIBLE(S);10HM,5%,2W,AF,TP,	
4	CE01	2401-002597 C-AL;220uF,20%,35V,GP,TP,10x12.5,5	
4	DE03	0403-001325 DIODE-ZENER;MTZJ15C,14.35-15.09V,500mW,D	
4	RE02	2001-001178 R-CARBON(S);680OHM,5%,1/2W,AA,	
4	RE05	2004-001397 R-METAL(S);4.7KOHM,1%,1/2W,AA,	
4	RE09	2008-001018 R-FUSIBLE(S);0.47OHM,10%,2W,AF	
4	RE10	2004-004048 R-METAL(S);3.9Kohm,1%,1/2W,AA,TP,2.5x6.5	
4	R516	2008-000206 R-FUSIBLE(S);10HM,5%,1/2W,AF,T	
4	R718	2001-000515 R-CARBON;220OHM,5%,1/8W,AA,TP,	
4	C709	2202-000806 C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
3	C406	2301-001296 C-FILM,MPPF;720NF,5%,400V,BK,26X15.5X20M	
2	A/SIDE	AA96-01156A ASSY MISC,A/V SIDE,CFT2791KX/SMS;K57A	
3	R701	2001-000028 R-CARBON(S);100OHM,5%,1/2W,AB,	
3	R702	2001-000028 R-CARBON(S);100OHM,5%,1/2W,AB,	
3	C701	2202-000121 C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
3	C702	2202-000121 C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP	
3	C703	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3	
3	C704	2202-000231 C-CERAMIC,MLC-AXIAL;330PF,10%,50V,Y5P,3	
3	C705	2401-002009 C-AL;100UF,20%,16V,GP,TP,6.3X7	
3	C706	2401-002009 C-AL;100UF,20%,16V,GP,TP,6.3X7	
3	L701	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
3	L702	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
3	L703	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
3	L704	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
3	L707	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
3	L708	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
3	00VER	AA41-00345A PCB-SIDE A/V;CS29K1,FR-1,1L,A,1.6T,245x2	
3	JH701	3722-000143 JACK-PHONE;1P3.4MM,-,MBAG	
3	JA701	3722-001031 JACK-RCA;3P,3.6MM,#18,AU	
3	CN704	AA39-00070A LEAD CONNECTOR-ASSY;4P,200mm,YBNH250-04,	
3	CN701	AA39-20068E LEAD CONNECTOR-ASSY;-YBNH025-08,67096-0	
3	CN703	AA39-20069C LEAD CONNECTOR-ASSY;5P,YBNH025-05,67096	
3	BAND	AA63-10002A BAND-TIE;-NYLON66V2,-,-,L100,NTR,-,-	

## ASSY COVER FRONT

1 A/CFRN AA90-04432A ASSY COVER FRONT;25M6,G4309,K57A,HIPS,HB

Loc. No.	Code No.	Description ; Specification	Remark
2	PC+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
2	AV+CF	6002-000522 SCREW-TAPPING;TH,+,2,M4,L15,ZP	
2	BRAC+C	6002-000522 SCREW-TAPPING;TH,+,2,M4,L15,ZP	
2	SPK+CF	6006-001095 SCREW-ASS'Y TAPT;WPBH,+,M4,L12,ZPC(YEL)	
2	CRT+CF	AA60-10050V SCREW-ASSY;WC,HH,+,M6,L30,SWRCH18A,ZPC(S	
2	S/CRT	AA61-00813B SUPPORT-CRT;25M6,29M6,HIPS,HB,NATURL	
2	BRAC	AA61-10053A BRACKET-CRATER;-7277,STS304,T0.5,-,-	
2	F/C	AA64-03221A CABINET FRONT;25M6,HIPS,HB,G4309,K57A	
3	KC+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
3	WR+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
3	HOLDER	AA61-00711B HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO	
3	SPRING	AA61-60003J SPRING-CS;-,-,SUS304,0.5,OD6,H	
3	CC	AA63-00489B COVER-CONTROL;25M6,ABS,HB,WHT,SVM6145+CL	
3	KP	AA64-02100B KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11	
3	KC	AA64-02102B KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10	
3	WRL	AA64-02103B WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR	
3	DP	AA64-02104B DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV	
2	BADGE	AA64-70117B BADGE-BRAND;-AL,-,-,L65,R2000,SILVER,SS	
2	L/QMS	AA68-02391A LABEL-QMS;ART-PAPER(90)G,110x24mm	
2	R/CAP	AA73-00005B RUBBER-CAP;FLAT,PRJ,SILICONE RUBBER,WHIT	
2	A/HSPK	AA91-00507A ASSY HOLDER SPK;-,-,80HM/15W,-,ASSY HOLD	
2	A/CTRL	AA96-01189A ASSY PCB P-CONTROL,CL21M6WKX;K57A	
3	DZY01	0403-000508 DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500	
3	RY03	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP,	
3	RY06	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP,	
3	RY02	2001-000241 R-CARBON;1.5KOHM,5%,1/8W,AA,TP	
3	RY05	2001-000241 R-CARBON;1.5KOHM,5%,1/8W,AA,TP	
3	RY01	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY04	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY07	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
3	RY08	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	JY01	3812-000219 JUMPER-WIRE-SQ,COPPER;TA0.6GSN/52M/M(A	
3	00VER	AA41-00709A PCB-QUEST CONTROL;TXM2792FX,FR-1,1L,A,1.	
3	SW07	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY02	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY03	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY04	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY05	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY06	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	CY01	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
3	LDY02	0601-000465 LED;ROUND,GRN,5mm,565	
3	RMV01	AA32-00012A MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
3	CNY01	AA39-00100C LEAD CONNECTOR-ASSY;4P,YBNH250-04,35155	
3	CNY02	AA39-20005A LEAD-CONNECTOR,ASSY;-YBNH025-03,67096-0	
3	BAND	AA63-10002A BAND-TIE;-NYLON66V2,-,-,L100,NTR,-,-	
2	R-CAP	0203-001290 TAPE-OPP MASKING;ANT 100C,T0.073,W30,L50	
2	CWFC	AA65-00011C CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,25M	
2	CWFC	AA65-30105A CLAMP-WIRE;NYLON 66N,VO,NTR,15MM	
2	DRESSP	AA65-30018A CLAMP-WIRE;-NYLON6.6,-,-,DATL	

## ASSY COVER REAR

1 A/REAR AA90-01757A ASSY COVER REAR;CL25M6W7X/XAX

2	CB+CF	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
2	TER+RK	6003-001026 SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR	
2	SPCBC	AA63-60001X SPACER-FELT;FELT,T0.5,330X15MM	
2	B/C	AA64-02098C CABINET-BACK;25M6,HIPS,HB,G4309	
2	AC+BC	AA65-30008A CLAMP-CORD;-PE,HB,BLK,-,-	
2	H/T	AA61-00356B HOLDER-TUNER,F/JACK;-501F,ABS,HB,BLK,-	
2	FBT	AA65-30018A CLAMP-WIRE;-NYLON6.6,-,-,DATL	
2	YUGO	AA65-30018A CLAMP-WIRE;-NYLON6.6,-,-,DATL	
2	DRES/A	AA65-30018A CLAMP-WIRE;-NYLON6.6,-,-,DATL	

## ASSY LABEL

1 A/LABE AA92-02725A ASSY LABEL;CL25M6W7X/XAP

2	INLAYB	AA64-00892G INLAY BACK;D2,D3,RCA9P+S-VHS+DVD,PS SHEE	
2	IN/AV	AA64-01506C INLAY-AV;29K3,PVC-SHEET,T0.3,-,P/GRAY,-	
2	L/RAT	AA68-01547A LABEL RATING;TETRONEPAPER90(S)B,LATIN	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------	----------	----------	-----------------------------	--------

### ASSY BOX

1	A/BOX	AA92-07432A	ASSY BOX;25M6,K57A,25				
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD				
2	PCK	AA69-02037A	PACKING CASE;25M6,K57A,CB D-3 AB,YEL,A1,				

### ASSY P/MATERIAL

1	A/PACK	AA92-02775A	ASSY P/MATERIAL;CL25M6W7X/XAX				
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,				
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2				
2	PE-BAG	AA69-01209A	BAG;SHEET,25-27,W54,L60,FOAM,OEM.				
2	C/SET	AA69-01264B	CUSHION-SET;25M6,EPS C=0.02				

### ASSY CPT

1	A/CPT	AA91-05989A	ASSY CPT;A59QDF891X999,+380MG,1.05MH				
△ 2	CRT	AA03-00322A	CRT COLOR;A59QDF891X999,+380MG,1.05MH,1.				
2	DCOIL	AA27-00262A	COIL DEGAUSSING;25INCH F,10%,45TS,4.50H				
2	S/CRT	AA60-00038A	SPACER-CRT;PS,SHEET,T1.0,BLK,OD22,ID10.				
2	CDCOIL	AA65-30017A	CLAMP-D,COIL;- ,NYLON-66,V0,NTR,DADH300,2				
2	CDCOIL	AA65-30113A	CLAMP-D,COIL;NYLON66,V2,BLK,TVI25-29,-				
2	A/TBC	AA98-70008B	ASSY-TBC,WIRE(P);- ,TVI 25',NTSC,2P-WH,-				

### ASSY ACCESSORY

1	A/ACCE	AA92-07390A	ASSY ACCESSORY;K57A,25,XAP/XA0/XBM				
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y				
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP				
2	BATT	4301-000120	BATTERY-MN;1.5V;-,AA				
2	C/RCA	AA39-40001B	PATCH-CORD;3P-3P1500MMRED,WHT,YEL,500				
2	RMT	AA59-00141A	REMOCON;- ,TM58,SSM174PT,41,SS,L/GRAY,M				
2	C/WARR	AA68-00987A	CARD WARRANTY;W/P100,A4,1P,SELA				
2	I/B2	AA68-02710A	MANUAL USERS;K57A,ENG,W/P100(G)				
2	I/B1	AA68-02711A	MANUAL USERS;SPA,K57A,W/P100(G)				
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151				

## 7-3 CL21M6WKX/STR

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

### ASSY CHASSIS

1	A/CHAS	AA91-05975A	ASSY CHASSIS;CL21M6WKX;LATIN,K57A
2	A/MAIN	AA94-12422A	ASSY PCB MAIN;CL21M6WKX;K57A LATIN
△ 3	D801S	0402-001160	DIODE-BRIDGE;D5SB60,600V,2.8A,SIP-4,ST
3	D404	0402-001296	DIODE-RECTIFIER;FMP-3FU,1500V,5A,T0-3PF
△ 3	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW
3	ICW01	1001-000211	IC-VIDEO SWITCH;NJM2235D,-,DIP,8P,300MIL
3	IC202	1103-001200	IC-EEPROM;M24C08-WBN6,1024x8Bit,DIP,8P,3
3	IC601	1204-001662	IC-SOUND PROCESSOR;MSP3425G-B7,DIP,52P5
△ 3	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T
△ 3	PT801S	1404-001264	THERMISTOR-PTC;4.50HM,+30/-20%,220V,290V
△ 3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-MIT
△ 3	CR402S	2301-001219	C-FILM,MPE-PPF;3.9nF,5%,1.6KV,TP,29x8.5x
△ 3	CR403S	2303-000334	C-FILM,PPF;3nF,5%,1.6KV,BK,31x13.5x8,20
△ 3	CX801S	2306-000318	C-FILM,MPPF;220NF,20%,250V,-,2
△ 3	CR406S	2306-001004	C-FILM,MPPF;300nF,5%,400V,TP,26x14x21mm,
3	C803	2401-001426	C-AL;470UF,400V
3	C821	2401-003633	C-AL;220UF,20%,160V,GP,ST,22X25MM,1
△ 3	SF101S	2904-001107	FILTER-SAW AV;45.75MHZ,SIP5K,TP,12.6dB,N
△ 3	SF102S	2904-001418	FILTER-SAW AV;45.75MHZ,-,ST,-,-
△ 3	RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO
△ 3	FP801S	3601-000293	FUSE-CARTRIDGE;250V,5A,SLOW-BLOW,GLASS,5
△ 3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NL-
3	CN902	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
3	JA701	3722-001333	JACK-RCA9P,3.2mm,NL,BLK
3	JA702	3722-001596	JACK-RCA;3P/9P,3.5mm,NL,BLK[GRN/BLU/RED
△ 3	IC201S	AA09-00316A	IC MICOM;TDA9592PS/N1/3I,SPM-464A,64P,3.
△ 3	T444S	AA26-00057A	TRANS-FBT,-,FUH-29A001B(S),25/29,130
△ 3	T801S	AA26-00179C	TRANS SWITCHING;EER4950,K57A,CTF2791KX,9
△ 3	T401A	AA26-50001M	TRANS HORIZ DRIVE,-,80MH,520UH,4UH,E
3	L808	AA27-00098A	COIL CHOKE,-,24UH,10%,-,0.1,3.0A,DR10X
3	L409	AA27-00159A	COIL HORIZ WIDTH;140UH,140UH,YL-81 DR 1
3	LR401A	AA27-30003L	COIL LINEARITY,-,73UH,DR,12X15,0.55MM,BK
△ 3	LX801S	AA29-00011A	FILTER LINE NOISE;C232W8,-,0.20MAX,1.5KV
3	WG	AA39-20010B	LEAD-CONNECTOR,ASSY,-,YFH800-01,500MM,1P
3	CN503	AA39-20604A	LEAD CONNECTOR-ASSY,-,YBNH250-09,YBNH05/
△ 3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△ 3	IC802	AA96-00245A	ASSY H/S,-,AA62-00055A,KA7632,-
4		1203-001939	IC-POSIFIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS,-,T1.0,-,35*15*25,D1,-,-
3	Q401	AA96-00624A	ASSY H/S,-,POWER,AA62-00057A,KSD5703,WA
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0502-001136	TR-POWER;KSD5703,NPN,70W,T0-3PF,ST,8-
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA60-30001A	WASHER-PLATE,-,M3,1D3.5,15X8.5,T1.0,-,SB
4		AA62-00057A	HEAT SINK-PS,-,T1.0,-,41*20*60,D2,-,-
3	IC501	AA96-50311A	ASSY H/S,-,VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	ICVIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS,-,SECC,T1.0,-,33X15X30FT-2
△ 3	IC801S	AA96-50373K	ASSY H/S,-,POWER,AA62-30181K,K57A
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-002597	IC-PWM CONTROLLER;KA501265RF-YDTU,T0-3PF
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA61-11028A	BRACKET-IC;SECC,T1.0,-,
4		AA62-30181K	HEATSINK-ES,-,AL6063EXTR,-,2,WHT,40MM,-
3	IC602	AA96-50398A	ASSY H/S,-,AA62-30182E,TDA7297,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001064	IC-POWERAMP;7297,ZIP,15P,-,DUA
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30182E	HEAT-SINK,ES,-,A6063 EXTR,-,WHT,-,-,40
3	IC301	AA96-50406A	ASSY H/S;LA62-30180K,LA7845
4		1204-000517	IC-LINEAR;LA7845SIPVERTICALAMP
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30180K	HEATSINK-ES,-,A6063EXTR,-,WHT,50/13,-,
△ 3	D805	BP96-00020F	ASSY HEAT SINK P;H/S TR,SCREW,FFPF10U20S
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001375	DIODE-RECTIFIER;FFPF10U20S,200V,10A,T0-2
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

4		AA62-00045A	HEAT SINK-PS,-,T1.0,-,DREAM,-,-,-,-
△ 3	D808	BP96-00020J	ASSY HEAT SINK P;H/S TR,SCREW,FMG-G2CS,0
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001230	DIODE-RECTIFIERFMG-G2CS,1000V,3A,T0-22
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS,-,T1.0,-,DREAM,-,-,-,-
3	CN901	3711-002642	POST-HEADER;67094-003(AUTO)
3	CN604	3711-002644	POST-HEADER;67094-005(AUTO)
3	CN701	3711-002647	POST-HEADER;67094-008(AUTO)
3	Q801	0502-000242	TR-POWER;KSA614,PNP,-80V,-55V,
3	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,150V,1
△ 3	PWR/AC	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,
4		AA39-10006X	POWER-CORD;-,KKP419C,KLCE-2F,2.286MT
4		AA61-20284A	HOLDER P CORD;PPVO,BLK,KE-002
3	L/PQS	AA68-01018A	LABEL-PQS,-,50mmX,13,-,WHITE,-
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3.63/37
3		0202-000187	SOLDER-WIREFLUX;-,RS60S,D1.2.6
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3	A/AUTO	AA97-13471X	ASSY AUTO-MAIN;CL21M6WKX/XAX,K57A
4	D202	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D206	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D304	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D809	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D2403	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D802	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
△ 4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D504	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-204A
4	D402	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D951	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△ 4	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1
4	D405	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D406	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D303	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D407	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D409	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D501	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D2101	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2204	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2213	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2214	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2215	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2602	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2805	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2812	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	D2802	0403-000699	DIODE-ZENER;TZP27B,27V,27-30.8
4	D2306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	D2811	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	D2803	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m
4	D2202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2206	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2208	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2209	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2210	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2211	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2212	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2216	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2218	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2219	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2220	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	D2221	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500

Loc. No.	Code No.	Description ; Specification	Remark
4	DZ222	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ223	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ224	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ501	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ502	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ503	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ808	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ801	0403-001211 DIODE-ZENER;MTZJ12B,11.44-12.03V,500mW,D	
4	DZ303	0403-001221 DIODE-ZENER;UZ39BSB,35.36-37.19V,500mW,D	
4	DZ804	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
4	DZ301	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ305	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ302	0403-001329 DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
4	DZ810	0403-001373 DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D	
4	D602	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	D201	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	Q205	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q206	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q211	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q301	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q702	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q951	0501-000369 TRANSISTOR;KSC2331-Y(TAPG)	
4	Q203	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q204	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q207	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q208	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q701	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q802	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	IC603	1203-000515 IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
△	IC803	1203-001217 IC-POST.ADJUSTREG;431,TO-92,3P,4.58MIL,P	
△	VX801S	1405-000187 VARISTOR;750V,1250A,12.5x7mm,TP	
4	R231	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP	
4	R289	2001-000011 R-CARBON;75KOHM,5%,1/8W,AA,TP,1.8x3.2mm	
4	R306	2001-000016 R-CARBON(S);10HM,5%,1/2W,AA,TP	
4	R806	2001-000019 R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4m	
4	R405	2001-000020 R-CARBON(S);220OHM,5%,1/2W,AA,T	
4	R817	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R809	2001-000109 R-CARBON(S);4700HM,5%,1/2W,AA,	
4	J708	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R316	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R712	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R713	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R103	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R202	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R210	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R211	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R212	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R214	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R215	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R219	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R220	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R272	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R273	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R274	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R275	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R276	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R277	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R288	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R296	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R504	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R505	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R506	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R605	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R606	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R607	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R608	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R613	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R614	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RW01	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RW02	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RW04	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	RW05	2001-000281 R-CARBON;1000HM,5%,1/8W,AA,TP,	
4	R206	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R213	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R258	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R315	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
4	R615	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R618	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R619	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R813	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R822	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R835	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R248	2001-000343 R-CARBON;130OHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R609	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R611	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R610	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	J213	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R207	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R218	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R617	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R717	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R260	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R261	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R314	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R833	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R251	2001-000490 R-CARBON;200OHM,5%,1/8W,AA,TP,	
4	R718	2001-000515 R-CARBON;220OHM,5%,1/8W,AA,TP,	
4	R279	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP,	
4	R716	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP,	
4	R101	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R102	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R250	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R719	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R228	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R229	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R814	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8x3.2MM	
4	R245	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	R401	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP	
4	R270	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP,	
4	R271	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP,	
4	R216	2001-000645 R-CARBON;330KOHM,5%,1/8W,AA,TP	
4	R203	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R208	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R209	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R223	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R230	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R236	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R293	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R294	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R829	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R221	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R222	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R601	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R602	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R603	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R104	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R714	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R246	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4	R217	2001-000857 R-CARBON;560OHM,5%,1/8W,AA,TP,	
4	R136	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R105	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R705	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R706	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R707	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R708	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R711	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R247	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R514	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R812	2001-001067 R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R402	2001-001077 R-CARBON(S);150OHM,5%,1/2W,AA,	
4	R823	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R824	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R828	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R404	2001-001114 R-CARBON(S);270OHM,5%,1/2W,AA,	
4	R825	2001-001131 R-CARBON(S);33KOHM,5%,1/2W,AA,	
4	R803	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R804	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R827	2001-001168 R-CARBON(S);6.8KOHM,5%,1/2W,AB	
4	R807	2001-001170 R-CARBON(S);6.8OHM,5%,1/2W,AB,	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	R808	2001-001170 R-CARBON(S);6.80HM,5%,1/2W,AB,		4	C805	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R810	2001-001192 R-CARBON(S);820OHM,5%,1/2W,AB,		4	C824	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R403	2001-001066 R-CARBON(S);110OHM,5%,1/2W,AA,TP,2.4X6.4		4	C625	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R501H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C626	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R502H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C301	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
△	R511	2002-001009 R-COMPOSITION;2.7KOHm,10%,1/2W,AA,TP,3.7		4	C235	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
△	RY801S	2002-001012 R-COMPOSITION;8.2MOhm,5%,1/2W,AA,TP,3.7X		4	C102	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	R313	2003-000537 R-METALOXIDE(S);1KOHM,5%,1W,AD		4	C401	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	R408	2003-000540 R-METALOXIDE(S);1KOHM,5%,2W,AD		4	C621	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	R801	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C237	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	R802	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C414	2301-001065 C-FILM,MPPF;47NF,55,630V,TP,19	
4	R830	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		△	CR407S	2306-000134 C-FILM,MPPF;150nF,5%,400V,TP,19x17x11,7.	
4	R831	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C504	2301-001259 C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
4	R841	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C808	2301-001435 C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
4	R818	2003-000998 R-METALOXIDE;300OHM,5%,2W,AF,T		4	C306	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	R832	2003-001035 R-METALOXIDE(S);27OHM,5%,2W,AF		4	C305	2305-000285 C-FILM,MPEF;220NF,5%,100V,-,5M	
4	R419	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1		4	C213	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R423	2003-002007 R-METAL OXIDE(S);4.7KOHM,5%,2W,AF,TP,3.9		4	C214	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R407	2003-002008 R-METAL OXIDE(S);18KOHM,5%,2W,AF,TP,3.9X		4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R819	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R820	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C225	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R821	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C231	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R309	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP,3.9x		4	C236	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R310	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP,3.9x		4	C404	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-,5MM.	
4	R305	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C204	2305-000412 C-FILM,MPEF;470NF,5%,63V,-,5MM	
4	R307	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C218	2305-000412 C-FILM,MPEF;470NF,5%,63V,-,5MM	
4	R834	2004-001377 R-METAL(S);120KOHM,1%,1/2W,AA,TP,2.4X6.4		4	C105	2305-000665 C-FILM;104J, 60V,5MM TAPING	
△	RR401S	2004-001390 R-METAL(S);1KOHM,2%,1/2W,AA,TP		4	C206	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R416	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,		4	C209	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R420	2004-001405 R-METAL(S);79KOHM,1%,1/2W,AA,T		4	C219	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R280	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1		4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R826	2004-001983 R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4		4	C232	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R815	2008-000205 R-FUSIBLE(S);10OHM,5%,1/2W,AF,		4	C240	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R413	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,		4	C253	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R414	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,		4	C606	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R312	2008-000290 R-FUSIBLE;2.4OHM,5%,2W,AF,TP,3		4	C618	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R513	2008-000292 R-FUSIBLE;RF2WRT(S)3R3-J		4	C632	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R512	2008-000301 R-FUSIBLE(S);56ohm,5%,2W,AF,TP,3.9x10mm		4	C807	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R308	2008-001076 R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm		4	C812	2305-000665 C-FILM;104J, 60V,5MM TAPING	
△	CR405S	2201-000132 C-CERAMIC,DISC;100PF,10%,500V,Y5P,6X3MM,		4	C244	2309-000138 C-FILM,PE-PFF;100NF,5%,50V,TP	
4	C601	2201-000304 C-CERAMIC,DISC;0.001nF,0.25pF,50V,NP0,TP		4	C608	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C602	2201-000304 C-CERAMIC,DISC;0.001nF,0.25pF,50V,NP0,TP		4	C609	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C801	2201-000332 C-CERAMIC,AC;CK45TPAPGE250V222		4	C610	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C802	2201-000332 C-CERAMIC,AC;CK45TPAPGE250V222		4	C611	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C823	2201-000370 C-CERAMIC,DISC;220PF,10%,50V,Y5P,TP		4	C710	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C408	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C822	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C411	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C207	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C413	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C211	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C818	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C220	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C208	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NP0		4	C226	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C210	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NP0		4	C227	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C403	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,		4	C233	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C816	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,		4	C402	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C405	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-,5MM,T		4	C604	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C508	2201-000723 C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5		4	C619	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	CW04	2201-000982 C-CERAMIC,DISC;10NF,+80-20%,50		4	C811	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C820	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K		4	C304	2401-000326 C-AL;100UF,20%,35V,GP,8X11MM,5	
4	C302	2201-002103 C-CERAMIC,DISC;0.015nF,5%,500V,NP0,TP,6		4	C303	2401-000365 C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP		4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C110	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2		4	C104	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C120	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2		4	C212	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C603	2202-000286 C-CERAMIC,MLC-AXIAL;56PF,5%,50		4	C239	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C629	2202-000286 C-CERAMIC,MLC-AXIAL;56PF,5%,50		4	C614	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C223	2202-000252 C-CERAMIC,MLC-AXIAL;4.7nF,10%,50V,X7R,TP		4	C607	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C205	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C616	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C242	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C617	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C243	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C627	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C605	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C809	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C221	2202-000849 C-CERAMIC,MLC-AXIAL;18pF,5%,50V,CH,TP,3		4	C238	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C613	2301-000108 C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW01	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C622	2301-000108 C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW02	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C630	2301-000111 C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	C224	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C634	2301-000111 C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	C234	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C623	2301-000192 C-FILM,PEF;1NF,5%,50V,5.3X10MM		4	C412	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C624	2301-000192 C-FILM,PEF;1NF,5%,50V,5.3X10MM		4	C101	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	C806	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.		4	C615	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C245	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9		4	C620	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	

## Electrical Parts List

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	C804	2401-001192	C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	4	J210	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C507	2401-001232	C-AL;4.7UF,20%,250V,GP,10X12.5	4	J211	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C409	2401-001397	C-AL;470UF,20%,25V,GP,10X16MM,	4	J212	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C410	2401-001397	C-AL;470UF,20%,25V,GP,10X16MM,	4	J215	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C612	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	4	J217	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	CW05	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	4	J219	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C633	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	4	J220	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C635	2401-001914	C-AL;1uF,20%,50V,BP,TP,5x11,5	4	J221	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C817	2401-002215	C-AL;2200UF,20%,25V,(105RD)13X	4	J222	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C407	2401-002268	C-ELEC;CE04-40/105250VT2R2-MWR	4	J223	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C825	2401-002300	C-ELECTROLYTIC;CE04WTAPG50V47U	4	J224	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C103	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11,5,5	4	J225	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C813	2401-002594	C-AL;220uF,20%,16V,GP,TP,8x11,5,5	4	J228	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C229	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	4	J231	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C810	2401-002619	C-AL;47uF,20%,25V,GP,TP,5x11,5	4	J232	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C814	2401-003028	C-AL;100UF,20%,25V,WT,TP,6.3X1	4	J233	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C815	2401-003028	C-AL;100UF,20%,25V,WT,TP,6.3X1	4	J234	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C631	2401-003139	C-AL;1000UF,20%,25V,WT,TP,10*2	4	J236	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C819	2401-003139	C-AL;1000UF,20%,25V,WT,TP,10*2	4	J237	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L101	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J240	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L205	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J249	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L206	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J250	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L603	2701-000114	INDUCTOR-AXIAL;10UH,10%,2.5X3.	4	J251	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L707	2701-000127	INDUCTOR-AXIAL;15UH,10%,2.5X3.	4	J252	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L210	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J253	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L211	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J255	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
△	L401	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J256	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L604	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J257	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L605	2701-000142	INDUCTOR-AXIAL;1UH,10%,2.5X3.4	4	J274	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L212	2701-000158	INDUCTOR-AXIAL;22UH,10%,2.5X3.	4	J279	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L209	2701-000159	INDUCTORAXIAL;22uH,10%,4.2x9.8mm	4	J285	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L803	2701-000159	INDUCTORAXIAL;22uH,10%,4.2x9.8mm	4	J290	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L601	2701-000169	INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	4	J292	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L602	2701-000169	INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	4	J293	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L202	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	4	J294	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L203	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	4	J295	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L230	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	4	J302	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L204	2702-000142	INDUCTOR-RADIAL;22uH,5%,6x6.4mm	4	J304	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	X601	2801-000186	CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	4	J305	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	X201	2801-003433	CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300	4	J306	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
△	L403	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	4	J307	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L407	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	4	J308	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L501	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	4	J403	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L805	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	4	J404	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	R816	2901-000297	FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	4	J405	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	Z202	2903-000129	FILTER-CERAMIC;BR,4.5MHz,-,TP,-	4	J407	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J235	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J408	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L302	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J409	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L303	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J410	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L402	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J413	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L404	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J414	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L801	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J415	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L802	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J416	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L804	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J420	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L806	3301-000287	CORE-FERRITEBEAD;AA,3.5X1.0X6.	4	J421	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	L809	3301-001223	CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,	4	J422	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
△	FD802S	3601-001163	FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	4	J501	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
△	FD801S	3601-001228	FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	4	J502	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	F801A	3602-000114	FUSE-HOLDER;-,30MOHM	4	J503	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	F801B	3602-000114	FUSE-HOLDER;-,30MOHM	4	J504	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C203	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J505	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C502	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J601	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	C503	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J602	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J101	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J603	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J102	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J604	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J103	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J614	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J105	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J615	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J106	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J616	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J107	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J619	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J108	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J620	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J109	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J621	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J110	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J624	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J201	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J625	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J202	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J626	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J203	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J627	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J204	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J628	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
4	J205	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	4	J629	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A

Loc. No.	Code No.	Description ; Specification	Remark
4 J630	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J631	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J632	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J635	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J636	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J704	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J705	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J706	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J711	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J712	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J716	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J717	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J718	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J719	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J720	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J801	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J802	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J803	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J804	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J805	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J806	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J808	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J809	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J810	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J811	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J813	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J815	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J817	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J820	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J822	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J826	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J827	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J828	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J829	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J830	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J831	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J832	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J833	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J836	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J837	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J841	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 J842	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 R501	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 R502	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 R503	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 R715	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
△ 4 RY802S	3812-000219	JUMPER-WIRE-SO, COPPER;TA0.6SN/52M/M/A	
4 02VER	AA41-00656C	PCB-MAIN;CT-29K5(QUEST),FR-1,1L,C,1.6T,3	
4 EY301	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY302	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY303	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY304	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY401	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY402	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY403	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY404	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY407	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY408	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY409	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY410	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY411	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY412	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY413	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY414	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY419	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY420	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY421	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY423	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY424	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY425	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY426	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY427	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY428	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY429	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY430	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY431	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	
4 EY432	AA60-40011A	EYELET; ,ID2.0,0D2.8,-,-,BST	

[illegible]

Loc. No.	Code No.	Description ; Specification	Remark
4	EL404	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL405	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL406	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL407	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL501	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL502	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL805	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL806	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL807	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	EL808	AA60-40011B EYELET; ID2.2,OD3.2,-,-,BSP	
4	GT102	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT404	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT502	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT503	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	R256	2004-000433 R-METAL;1KOHM,1%,1/8W,AA,TP,1.	
4	C709	2202-000806 C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
4	R292	2001-000012 R-CARBON;680Kohm,5%,1/8W,AA,TP,1.8x3.2mm	

## ASSY COVER FRONT

1	A/CFRO	AA90-03573F	ASSY COVER FRONT;CL21M6WKX/XAX
2	PCB+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
2	SPK+CF	6006-001095	SCREW-ASSY TAPT;WP,BH,+M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+M5,L31.5,SWR
2	AV+CF	6003-001268	SCREW-TAPTITE;TH,+B,M4.0,L12.0,ZPC(YEL)
2	F/C	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,
3	KC+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
3	WR+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
3	SFFC	AA60-00091F	SPACER-FELT;FELT,150X10,-,-,BLK,T0.5,-
3	HP	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO
3	SPRING	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,OD6,H
3	CC	AA63-00613A	COVER-CONTROL;DP,21M6,AA63-00540A
3	KP	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11
3	KC	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10
3	WR	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR
3	DP	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV
3	C/F	AA64-02852C	CABINET-FRONT;DP,21M6,AA64-02330G
3	TAPE	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	INLAY	AA64-60448W	INLAY AV;S51A,PS SHEET,T0.3,BLK,SILVER E
2	BADGE	AA64-70123A	BADGE-BRAND;AL,SAMSUNG,SILVER,L=50,FLAT,
2	AHS	AA91-00427A	ASSY HOLDER SPK;-,-,PP80HM/15W,BLK,SEMI-D
2	CWFCR	AA65-00011C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,25M
2	WFFCL	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	APAVS	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WKX,K57A
3	RA01	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	RA02	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	CA06	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP.6.3x11.5
3	CA07	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP.6.3x11.5
3	JA101	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
3	O3VER	AA41-11017D	PCB-A/V SIDE;CT-29U1,FR-1,1L,D,1.6T,245X
3	JE01	3722-000143	JACK-PHONE;1P,3.4MM,-,MBAG
3	JA01	3722-001031	JACK-RCA;3P,3.6MM,#18,AU
3	CN06A	AA39-00070A	LEAD CONNECTOR-ASSY;4P,200mm,YBNH250-04,
3	CN01A	AA39-20068E	LEAD CONNECTOR-ASSY;-,-,YBNH025-08,67096-0
3	CN05A	AA39-20069C	LEAD CONNECTOR-ASSY;-,-,5P,YBNH025-05,67096
3	BAND	AA63-10002A	BAND-TIE;-,-,NYLON66V2,-,-,L100,NTR,-,-
2	APC	AA96-01189A	ASSY PCB P-CONTROL,CL21M6WKX,K57A
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
3	RY03	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
3	RY06	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
3	RY02	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,

Loc. No.	Code No.	Description ; Specification	Remark
3	RY05	2001-000241 R-CARBON;1.5KOHM,5%,1/8W,AA,TP	
3	RY01	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY04	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY07	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
3	RY08	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	JY01	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	
3	O0VER	AA41-00709A PCB-QUEST CONTROL;TXM2792FX,FR-1,1L,A,1.	
3	SW07	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY02	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY03	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY04	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY05	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY06	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	CY01	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP.6.3x11.5	
3	LDY02	0601-000465 LED;ROUND,GRN,5mm,565	
3	RMV01	AA32-00012A MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
3	CNY01	AA39-00100C LEAD CONNECTOR-ASSY;-,-,4P,YBNH250-04,35155	
3	CNY02	AA39-20005A LEAD-CONNECTOR,ASSY;-,-,YBNH025-03,67096-0	
3	BAND	AA63-10002A BAND-TIE;-,-,NYLON66V2,-,-,L100,NTR,-,-	
2	L/SPK	AA65-30018A CLAMP-WIRE;-,-,NYLON6.6,-,-,DATL	
2	INLCFC	AA64-02089A INLAY-BACK,PS,SHEET,T0.3,BLK,40X40	

## ASSY COVER REAR

1	A/CREA	AA90-04417A	ASSY COVER REAR;CL21M6WKX/GSU;K57A
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
2	CB+RCA	6003-001026	SCREW-TAPTITE;RH,+B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA60-00091J	SPACER-FELT;-,-,FELT,330X10,-,-,BLK,T0.5,-
2	C/B	AA64-02841A	CABINET BACK;DP,21M6,HB,AA64-02331B
2	AC+BC	AA65-30008A	CLAMP-CORD;-,-,PE,HB,BLK,-,-
2	INB	AA64-00892F	INLAY BACK;D2,D3,CA9P+DVD,PS SHEET,T0.3
2	HT	AA61-00356B	HOLDER-TUNER,F/JACK;-,-,501F,ABS,HB,BLK,-
2	L/RAT	AA68-01547A	LABEL RATING;TETRONEPAPER90(S)B,LATIN
2	FBT	AA65-30018A	CLAMP-WIRE;-,-,NYLON6.6,-,-,DATL
2	YUGO	AA65-30018A	CLAMP-WIRE;-,-,NYLON6.6,-,-,DATL
2	DRESA/	AA65-30018A	CLAMP-WIRE;-,-,NYLON6.6,-,-,DATL

## ASSY BOX

1	A/BOX	AA92-07400A	ASSY BOX;CL21M6WKX/RCL;K57A
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-01588L	PACKING CASE;21M6 K57A NT-AMER,D-2 BB,A1

## ASSY P/MATERIAL

1	A/PMAT	AA92-03716E	ASSY P/MATERIAL;21M6
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2	C/SET	AA69-01479A	CUSHION-SET;21M6,PS FOAMED,C=0.02
2	PE-BAG	AA69-01209A	BAG;SHEET,25-27,W54,L60,FOAM,OEM.

## ASSY CPT

1	A/CPT	AA91-05837A	ASSY CPT;A51QDX992X,21,+0MG,BARE,SDI FL
2	TAPE	0203-000432	TAPE-ACETATE;ACETATET0.25W19WH
2	CRT	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M
2	D-COIL	AA27-00256A	COIL DEGAUSSING;21IHCH,10%,35TS,4.5OHM,
2	D-Y	AA27-00198A	DEFLECTION YOKE;21DF,DIF-2192AA(NF),ST-3
2	SPACER	AA63-60028A	SPACER-DY;-,-,NEOPRENE,-,BLK,VOW
2	CDCOIL	AA65-00009B	CLAMP-D,COIL;NYLON 66,VO,-,-,21A8,-
2	A/TBC	AA98-70014D	ASSY-TBC,WIRE(P);-,-,22 Q,NTSC,PAL,1P,TVI
2	S/GUM	AA63-60004P	SPACER-GUM,CRT;-,-,NTR RUBBER,-,-,-,GRY,T2



Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

## ASSY ACCESSORY

1	A/ACCS	AA92-07406A	ASSY ACCESSORY;CL21M6WKX/STR;K57A
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	RMT	AA59-10113H	REMOCON;DP,TM59,-,-,-,-,AA59-10110H,
2	I/B2	AA68-02647A	MANUAL USERS;CL21M6WKX,SAMEX,ENG,W/P100G
2	I/B	AA68-02648A	MANUAL USERS;CL21M6WKX,SAMEX,SPA,W/P100G
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP
2	W/CARD	AA68-40004B	CARD-WARRANTY;W/P100(G),WHITE/BLUE,PERU
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151
2	BATT	4301-000120	BATTERY-MN;1.5V,-,AA
2	T/MAT	AA26-90001F	TRANS-MATCHING;-;3000HM/750HM,NTSC,40-89
2	A/ROD	AA42-00005A	ANT ROD;1000MM,5SECTIONS

## 7-4 CL21M6WKX/XAP

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

### ASSY CHASSIS

1	A/CHAS	AA91-05975A	ASSY CHASSIS;CL21M6WKX;LATIN,K57A
2	A/MAIN	AA94-12422A	ASSY PCB MAIN;CL21M6WKX;K57A LATIN
△ 3	D801S	0402-001160	DIODE-BRIDGE;D5SB60,600V,2.8A,SIP-4,ST
3	D404	0402-001296	DIODE-RECTIFIER;FMP-3FU,1500V,5A,T0-3PF
△ 3	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW
3	ICW01	1001-000211	IC-VIDEO SWITCH;NJM2235D,-,DIP,8P,300MIL
3	IC202	1103-001200	IC-EEPROM;M24C08-WBN6,1024x8Bit,DIP,8P,3
3	IC601	1204-001662	IC-SOUND PROCESSOR;MSP3425G-B7,DIP,52P,5
△ 3	NT801S	1404-001045	THERMISTOR NTC;4.7OHM,15%,2900K,35.0MMW,T
△ 3	PT801S	1404-001264	THERMISTOR-PTC;4.5OHM,+30/-20%,220V,290V
△ 3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-MJT
△ 3	CR402S	2301-001219	C-FILM,MPE-PPF;3.9nF,5%,1.6KV,TP,29x8.5x
△ 3	CR403S	2303-000334	C-FILM,PPF;3nF,5%,1.6KV,BK,31x13.5x8,20
△ 3	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,-,Z
△ 3	CR406S	2306-001004	C-FILM,MPPF;300nF,5%,400V,TP,26x14x21mm,
3	C803	2401-001426	C-AL;470UF,400V
3	C821	2401-003633	C-AL;220UF,20%,160V,GP,ST,22X25MM,1
△ 3	SF101S	2904-001107	FILTER-SAW AV;45.75MHz,SIP5K,TP,12.6dB,N
△ 3	SF102S	2904-001418	FILTER-SAW AV;45.75MHz,-,ST,-,-
△ 3	RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO
△ 3	FP801S	3601-000293	FUSE-CARTRIDGE;250V,5A,SLOW-BLOW,GLASS,5
△ 3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,Ni,-
3	CN902	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
3	JA701	3722-001333	JACK-RCA9P,3.2mm,Ni,BLK
3	JA702	3722-001596	JACK-RCA;3P/9P,3.5mm,Ni,BLK(GRN/BLU/RED
△ 3	IC201S	AA09-00316A	IC MICOM;TDA9592PS/N1/3I,SPM-464A,64P,3.
△ 3	T444S	AA26-00057A	TRANS-FBT;-,FUH-94A001B(S),25/29,130
△ 3	T801S	AA26-00179C	TRANS SWITCHING;EER4950,K57A,CFT2791KX,9
△ 3	T401A	AA26-50001M	TRANS HORIZ DRIVE;-,80MH,520UH,4UH,E
3	L808	AA27-00098A	COIL CHOKE;-,24uH,10%,-,0.1,3.0A,DR10X
3	L409	AA27-00159A	COIL HORIZ. WIDTH;140UH,140UH,YL-81 DR 1
3	LR401A	AA27-30003L	COIL LINEARITY;-,73UH,DR,12X15,0.55MM,BK
△ 3	LX801S	AA29-00011A	FILTER LINE NOISE;CZ32W8,-,0.20MAX,1.5KV
3	WG	AA39-20010B	LEAD-CONNECTOR,ASSY;-,YFH800-01,500MM,1P
3	CN503	AA39-20604A	LEAD CONNECTOR-ASSY;-,YBNH250-09,YBNH05/
△ 3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△ 3	IC802	AA96-00245A	ASSY H/S;-,AA62-00055A,KA7632,-
4		1203-001939	IC-POSIFIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-,T1.0,-,35*15*25,D1,-,-
4	Q401	AA96-00624A	ASSY H/S;-,POWER,AA62-00057A,KSD5703,WA
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0502-001136	TR-POWER;KSD5703,NPN,70W,T0-3PF,ST,8-
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW
4		AA60-30001A	WASHER-PLATE;-,M3,ID3.5,15X8.5,T1.0,-,SB
4		AA62-00057A	HEAT SINK-PS;-,T1.0,-,41*20*60,D2,-,-
3	IC501	AA96-50311A	ASSY-H/S;-,VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	ICVIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+,2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-,SECC,T1.0,-,33X15X30FT-2
△ 3	IC801S	AA96-50373K	ASSY H/S;-,POWER,AA62-30181K,K57A
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-002597	IC-PWM CONTROLLER;KA5Q1265RF-YDTU,T0-3PF
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW
4		AA61-11028A	BRACKET-IC;SECC,T1.0,-,
4		AA62-30181K	HEATSINK-ES;-,AL6063EXTR.,2,WHT,40MM,-
3	IC602	AA96-50398A	ASSY-H/S;-,AA62-30182E,TDA7297,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001064	IC-POWERAMP;7297,ZIP,15P,-,DUA
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW
4		AA62-30182E	HEAT-SINK,ES;-,A6063 EXTR,-,WHT,-,-,40
3	IC301	AA96-50406A	ASSY-H/S;LA62-30180K,LA7845
4		1204-000517	IC-LINEAR;LA7845SIPVERTICALAMP
4		6003-000333	SCREW-TAPTITE;RH,+,2S,M3,L10,ZPC(YEL),SW
4		AA62-30180K	HEATSINK-ES;-,A6063EXTR,-,WHT,50/13,-
△ 3	D805	BP96-00020F	ASSY HEAT SINK P;H/S TR,SCREW,FFPF10U20S
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001375	DIODE-RECTIFIER;FFPF10U20S,200V,10A,T0-2
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

4		AA62-00045A	HEAT SINK-PS;-,T1.0,-,DREAM,-,-,-,-
△ 3	D808	BP96-00020J	ASSY HEAT SINK P;H/S TR,SCREW,FMG-G2CS,O
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001230	DIODE-RECTIFIERFMG-G2CS,1000V,3A,T0-22
4		6003-000335	SCREW-TAPTITE;RH,+,2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-,T1.0,-,DREAM,-,-,-,-
3	CN901	3711-002642	POST-HEADER;67094-003(AUTO)
3	CN604	3711-002644	POST-HEADER;67094-005(AUTO)
3	CN701	3711-002647	POST-HEADER;67094-008(AUTO)
3	Q801	0502-000242	TR-POWER;KSA614,PNP,-80V,-55V,
3	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,150V,1
△ 3	PWR/AC	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,
4		AA39-10006X	POWER-CORD;-,KKP419C,KLCE-2F,2.286MT
4		AA61-20284A	HOLDER P CORD;PP,VO,BLK,KE-002
3	L/PQS	AA68-01018A	LABEL-PQS,-,50mmX,13,-,WHITE,-
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3		0202-000187	SOLDER-WIREFLUX;-,RS60S,D1.2.6
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3	A/AUTO	AA97-13471X	ASSY AUTO-MAIN;CL21M6WKX/XAX,K57A
4	D202	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D206	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D304	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D809	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	DZ403	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D802	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
△ 4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D504	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-204A
4	D402	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D951	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△ 4	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1
4	D405	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D406	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D303	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D407	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D409	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D501	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	DZ101	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ204	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ213	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ214	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ215	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ602	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ805	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ812	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ802	0403-000699	DIODE-ZENER;TZP278,27V,27-30.8
4	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ811	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ803	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ206	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ208	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ209	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ210	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ211	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ212	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ216	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ218	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ219	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ220	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ221	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500

Loc. No.	Code No.	Description ; Specification	Remark
4	DZ222	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ223	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ224	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ501	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ502	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ503	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ808	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ801	0403-001211 DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
4	DZ303	0403-001221 DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
4	DZ804	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
4	DZ301	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ305	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ302	0403-001329 DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,	
4	DZ810	0403-001373 DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D	
4	D602	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	DZ01	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	QZ05	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	QZ06	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	QZ11	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q301	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q702	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q951	0501-000369 TRANSISTOR;KSC2331-Y(TAPG)	
4	QZ03	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	QZ04	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	QZ07	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	QZ08	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q701	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q802	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	IC603	1203-000515 IC-VOL DETECTOR;7042,TO-92,3P,177MIL,PL	
△	IC803	1203-001217 IC-POST,ADJUSTREG;431,TO-92,3P,4.58MIL,P	
△	VX801S	1405-000187 VARISTOR;750V,1250A,12.5x7mm,TP	
4	R231	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP,	
4	R289	2001-000011 R-CARBON;75Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R306	2001-000016 R-CARBON(S);10HM,5%,1/2W,AA,TP	
4	R806	2001-000019 R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
4	R405	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R817	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R809	2001-000109 R-CARBON(S);470OHM,5%,1/2W,AA,	
4	J708	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R316	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R712	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R713	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R103	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R202	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R210	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R211	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R212	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R214	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R215	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R219	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R220	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R272	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R273	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R274	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R275	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R276	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R277	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R288	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R296	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R504	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R505	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R506	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R605	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R606	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R607	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R608	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R613	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R614	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW01	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW02	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW04	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW05	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R206	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R213	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R258	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R315	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
4	R615	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R618	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R619	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R813	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R822	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R835	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	RZ48	2001-000343 R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R609	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R611	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R610	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	J213	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R207	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R218	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R617	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R717	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R260	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R261	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R314	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R833	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R251	2001-000490 R-CARBON;200OHM,5%,1/8W,AA,TP,	
4	R718	2001-000515 R-CARBON;220OHM,5%,1/8W,AA,TP,	
4	RZ79	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP,	
4	R716	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP,	
4	R101	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R102	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R250	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R719	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	RZ28	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ29	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R814	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R245	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	R401	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP	
4	RZ70	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP,	
4	RZ71	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP,	
4	R216	2001-000645 R-CARBON;330KOHM,5%,1/8W,AA,TP	
4	R203	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ08	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ09	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ23	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ30	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ36	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ93	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ94	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R829	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ21	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	RZ22	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R601	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R602	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R603	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R104	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R714	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	RZ46	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4	R217	2001-000857 R-CARBON;560OHM,5%,1/8W,AA,TP,	
4	R136	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R105	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R705	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R706	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R707	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R708	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R711	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	RZ47	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R514	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R812	2001-001067 R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R402	2001-001077 R-CARBON(S);150OHM,5%,1/2W,AA,	
4	R823	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R824	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R828	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R404	2001-001114 R-CARBON(S);270OHM,5%,1/2W,AA,	
4	R825	2001-001131 R-CARBON(S);33KOHM,5%,1/2W,AA,	
4	R803	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R804	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R827	2001-001168 R-CARBON(S);6.8KOHM,5%,1/2W,AB	
4	R807	2001-001170 R-CARBON(S);6.8OHM,5%,1/2W,AB,	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	R808	2001-001170 R-CARBON(S);6.80HM,5%,1/2W,AB,		4	C805	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R810	2001-001192 R-CARBON(S);8200HM,5%,1/2W,AB,		4	C824	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R403	2001-001066 R-CARBON(S);1100HM,5%,1/2W,AA,TP2.4X6.4		4	C625	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R501H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP3.7		4	C626	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R502H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP3.7		4	C301	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
△	RY801S	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP3.7		4	C235	2301-000342 C-FILM,PEF;2.2nf,5%,50V,TP,7.4x3.9x13mm,	
4	R313	2003-000537 R-METALOXIDE(S);1KOHM,5%,1W,AD		4	C102	2301-000383 C-FILM,PEF;10nf,5%,50V,TP,6x7x3.2mm,5mm	
4	R408	2003-000540 R-METALOXIDE(S);1KOHM,5%,2W,AD		4	C401	2301-000383 C-FILM,PEF;10nf,5%,50V,TP,6x7x3.2mm,5mm	
4	R801	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C621	2301-000383 C-FILM,PEF;10nf,5%,50V,TP,6x7x3.2mm,5mm	
4	R802	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C237	2301-000445 C-FILM,PEF;4.7nf,5%,50V,TP,5.5x7x3mm,5mm	
4	R830	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		△	C414	2301-001065 C-FILM,MPPF;47NF,55,630V,TP,19	
4	R831	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	CR407S	2306-000134 C-FILM,MPPF;150nf,5%,400V,TP,19x17x11,7.	
4	R841	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C504	2301-001259 C-FILM,MPPF;100nf,5%,400V,TP,19x8x16,7.5	
4	R818	2003-000998 R-METALOXIDE;3000HM,5%,2W,AF,T		4	C808	2301-001435 C-FILM,PPF;1.5nf,5%,1.2kV,TP,15x8x12.5mm	
4	R832	2003-001035 R-METALOXIDE(S);270HM,5%,2W,AF		4	C306	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	R419	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP3.9x1		4	C305	2305-000285 C-FILM,MPEF;220NF,5%,100V,-,5M	
4	R423	2003-002007 R-METAL OXIDE(S);4.7KOHM,5%,2W,AF,TP3.9		4	C213	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R407	2003-002008 R-METAL OXIDE(S);18KOHM,5%,2W,AF,TP3.9X		4	C214	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R819	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R820	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R821	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C225	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R309	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP3.9x		4	C231	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R310	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP3.9x		4	C236	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R305	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C404	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-,5MM.	
4	R307	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C204	2305-000412 C-FILM,MPEF;470NF,5%,63V,-,5MM	
4	R834	2004-001377 R-METAL(S);120KOHM,1%,1/2W,AA,TP2.4X6.4		4	C218	2305-000412 C-FILM,MPEF;470NF,5%,63V,-,5MM	
△	RR401S	2004-001390 R-METAL(S);1KOHM,2%,1/2W,AA,TP		4	C105	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R416	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,		4	C206	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R420	2004-001405 R-METAL(S);9KOHM,1%,1/2W,AA, T		4	C209	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R280	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP1		4	C219	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R826	2004-001983 R-METAL;2.49KOHM,1%,1/2W,AA,TP2.4X6.4		4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R815	2008-000205 R-FUSIBLE(S);100HM,5%,1/2W,AF,		4	C232	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R413	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,		4	C240	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R414	2008-000253 R-FUSIBLE(S);0.470HM,5%,1W,AF,		4	C253	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R312	2008-000290 R-FUSIBLE;2.40HM,5%,2W,AF,TP3		4	C606	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R513	2008-000292 R-FUSIBLE;RF2WRT(S)3R3-J		4	C618	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R512	2008-000301 R-FUSIBLE(S);56ohm,5%,2W,AF,TP3.9x10mm		4	C632	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R308	2008-001076 R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP3.9x10mm		4	C807	2305-000665 C-FILM;104J, 60V,5MM TAPING	
△	CR405S	2201-000132 C-CERAMIC, DISC;100PF,10%,500V,Y5P6X3MM,		4	C812	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	C601	2201-000304 C-CERAMIC, DISC;0.001nf,0.25pf,50V,NP0,TP		4	C244	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP	
4	C602	2201-000304 C-CERAMIC, DISC;0.001nf,0.25pf,50V,NP0,TP		4	C608	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	C801	2201-000332 C-CERAMIC, AC;CK45PTAPGE250V222		4	C609	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	C802	2201-000332 C-CERAMIC, AC;CK45PTAPGE250V222		4	C610	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	C823	2201-000370 C-CERAMIC, DISC;220PF,10%,50V,Y5P,TP		4	C611	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	C408	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C710	2401-002075 C-AL;4.7uf,20%,50V,GP,TP,5x11,5mm	
4	C411	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C822	2401-000262 C-AL;100UF,20%,160V,GP;16X25MM,5MM,	
4	C413	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C207	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C818	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C211	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C208	2201-000573 C-CERAMIC, DISC;47PF,5%,50V,NP0		4	C220	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C210	2201-000573 C-CERAMIC, DISC;47PF,5%,50V,NP0		4	C226	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C403	2201-000599 C-CERAMIC, DISC;560PF,10%,500V,		4	C227	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C816	2201-000599 C-CERAMIC, DISC;560PF,10%,500V,		4	C233	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C405	2201-000639 C-CERAMIC, DISC;680PF,10%,2KV,Y5P,-,5MM,T		4	C402	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C508	2201-000723 C-CERAMIC, DISC;4.7nf,20%,3KV,Y5U, TP,16x5		4	C604	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	CW04	2201-000982 C-CERAMIC, DISC;10NF,+80-20%,50		4	C619	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C820	2201-000991 C-CERAMIC, HIC;CK45(T)B2KV561-K		4	C811	2401-000302 C-AL;100UF,20%,25V,GP;6X11MM,5	
4	C302	2201-002103 C-CERAMIC, DISC;0.015nf,5%,500V,NP0,TP,6		4	C304	2401-000326 C-AL;100UF,20%,35V,GP;8X11MM,5	
4	C505	2202-000106 C-CERAMIC, MLC-AXIAL;1.5nf,20%,16V,Y5P,TP		4	C303	2401-000365 C-AL;100uf,20%,50V,WT,TP,10x12.5mm,	
4	C110	2202-000127 C-CERAMIC, MLC-AXIAL;10NF,+80-2		4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C120	2202-000127 C-CERAMIC, MLC-AXIAL;10NF,+80-2		4	C104	2401-000480 C-AL;10UF,20%,50V,GP;5X11MM,5M	
4	C603	2202-000286 C-CERAMIC, MLC-AXIAL;56PF,5%,50		4	C212	2401-000480 C-AL;10UF,20%,50V,GP;5X11MM,5M	
4	C629	2202-000286 C-CERAMIC, MLC-AXIAL;56PF,5%,50		4	C239	2401-000480 C-AL;10UF,20%,50V,GP;5X11MM,5M	
4	C223	2202-000252 C-CERAMIC, MLC-AXIAL;4.7nf,10%,50V,X7R,TP		4	C614	2401-000480 C-AL;10UF,20%,50V,GP;5X11MM,5M	
4	C205	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C607	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C242	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C616	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C243	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C617	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C605	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C627	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C221	2202-000849 C-CERAMIC, MLC-AXIAL;18pf,5%,50V,CH,TP,3.		4	C809	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C613	2301-000108 C-FILM, PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	C238	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	C622	2301-000108 C-FILM, PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW01	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	C630	2301-000111 C-FILM, PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW02	2401-000603 C-AL;1UF,20%,50V,GP;5X11MM,5MM	
4	C634	2301-000111 C-FILM, PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	C224	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C623	2301-000192 C-FILM, PEF;1NF,5%,50V,5.3X10MM		4	C234	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C624	2301-000192 C-FILM, PEF;1NF,5%,50V,5.3X10MM		4	C412	2401-000927 C-AL;22UF,20%,250V,GP;13X20MM,	
4	C806	2301-000204 C-FILM, PEF;2.7NF,5%,50V,7.4X3.		4	C101	2401-000962 C-AL;22uf,20%,50V,GP,TP,5x11,5	
4	C245	2301-000224 C-FILM, PEF;22NF,5%,50V,7.4X3.9		4	C615	2401-001026 C-AL;3.3UF,20%,50V,GP;5X11MM,5	
				4	C620	2401-001026 C-AL;3.3UF,20%,50V,GP;5X11MM,5	

Loc. No.	Code No.	Description ; Specification	Remark
4	C804	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C507	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	C409	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C410	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C612	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	CW05	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5	
4	C633	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	C635	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5	
4	C817	2401-002215 C-AL;2200UF,20%,25V,(105RD)13X	
4	C407	2401-002268 C-ELEC;CE04-40/105250V/T2R2-MWVR	
4	C825	2401-002300 C-ELECTROLYTIC;CE04WTPAG50V47U	
4	C103	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
4	C813	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
4	C229	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5	
4	C810	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5	
4	C814	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	C815	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	C631	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2	
4	C819	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2	
4	L101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L205	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L206	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L603	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L707	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L210	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L211	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
△	4	L401 2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L604	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L605	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L212	2701-000158 INDUCTOR-AXIAL;22UH,10%,2.5X3.	
4	L209	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L803	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L601	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	
4	L602	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	
4	L202	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L203	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L230	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L204	2702-000142 INDUCTOR-RADIAL;22uH,5%,6x6.4mm	
4	X601	2801-000186 CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
4	X201	2801-003433 CRYSTAL-UNIT;12MHz,30PPM,28-AAM,30PF,300	
△	4	L403 2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L407	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L501	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	L805	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	R816	2901-000297 FILTER-EMI ON BOARD;-,3A,-,3.5x5,TP,-	
4	Z202	2903-000129 FILTER-CERAMIC;BR,4.5MHz,-,TP,-	
4	J235	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L302	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L303	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L402	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L404	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L801	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L802	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L804	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L809	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,-	
△	4	FD802S 3601-001163 FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
△	4	FD801S 3601-001228 FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
4	F801A	3602-000114 FUSE-HOLDER;-,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-,30MOHM	
4	C203	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	C502	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	C503	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J101	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J109	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J201	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J202	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J203	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J204	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J205	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4	J210	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J211	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J212	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J215	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J217	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J219	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J220	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J221	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J222	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J223	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J224	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J225	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J228	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J231	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J232	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J233	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J234	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J236	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J237	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J240	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J249	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J250	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J251	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J252	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J253	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J255	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J256	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J257	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J274	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J279	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J285	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J290	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J292	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J293	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J294	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J295	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J302	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J304	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J305	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J306	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J307	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J308	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J403	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J404	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J405	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J407	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J408	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J409	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J410	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J413	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J414	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J415	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J416	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J420	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J421	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J422	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J501	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J502	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J503	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J504	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J505	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J614	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J615	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J616	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J619	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J620	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J621	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J624	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J625	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J626	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J627	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J628	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J629	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	

Samsung Electronics

Loc. No.	Code No.	Description ; Specification	Remark
4	EL404	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL405	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL406	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL407	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL501	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL502	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL805	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL806	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL807	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	EL808	AA60-40011B EYELET;-ID2.2,0D3.2,-,-,BSP	
4	GT102	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT404	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT502	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT503	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	L/LINE	AA68-01544A LABEL,LINE,ALL MDL COMMON	
4	R256	2004-000433 R-METAL;1KOHM,1%,1/8W,AA,TP,1.	
4	C709	2202-000806 C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
4	R292	2001-000012 R-CARBON;680Kohm,5%,1/8W,AA,TP,1.8x3.2m	

## ASSY COVER FRONT

1	A/CFRO	AA90-03573F	ASSY COVER FRONT;CL21M6WKX/XAX
2	PCB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPK+CF	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR
2	AV+CF	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)
2	F/C	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,
3	KC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	WR+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	SFFC	AA60-00091F	SPACER-FELT;-FELT,150X10,-,-,BLK,T0.5,-
3	HP	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO
3	SPRING	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,0D6,H
3	CC	AA63-00613A	COVER-CONTROL;DP;21M6,AA63-00540A
3	KP	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11
3	KC	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10
3	WR	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR
3	DP	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV
3	C/F	AA64-02852C	CABINET-FRONT;DP;21M6,AA64-02330G
3	TAPE	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	INLAY	AA64-60448W	INLAY AV;S51A,PS SHEET,T0.3,BLK,SILVER E
2	BADGE	AA64-70123A	BADGE-BRAND;AL,SAMSUNG,SILVER,L=50,FLAT,
2	AHS	AA91-00427A	ASSY HOLDER SPK;-,-,PP80HM,15W,BLK,SEMI-D
2	CWFCR	AA65-00011C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,25M
2	CWFCL	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	APAVS	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WK,K57A
3	RA01	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	RA02	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	CA06	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11,5
3	CA07	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11,5
3	JA101	3812-000219	JUMPER-WIRE-SQ,COPPER;TA0.6SN/52M/M(A
3	O3VER	AA41-11017D	PCB-A/V SIDE;CT-29U1,FR-1,1L,D,1.6T,245X
3	JE01	3722-000143	JACK-PHONE;1P3.4MM,-,MBAG
3	JA01	3722-001031	JACK-RCA;3P,3.6MM,#18,AU
3	CN06A	AA39-00070A	LEAD CONNECTOR-ASSY;4P;200mm,YBNH250-04,
3	CN01A	AA39-20068E	LEAD CONNECTOR-ASSY;-YBNH025-08,67096-0
3	CN05A	AA39-20069C	LEAD CONNECTOR-ASSY;5P;YBNH025-05,67096
3	BAND	AA63-10002A	BAND-TIE;-NYLON66V2,-,-,L100,NTR,-,-
2	APC	AA96-01189A	ASSY PCB P-CONTROL,CL21M6WKX,K57A
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
3	RY03	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
3	RY06	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
3	RY02	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
3	RY05	2001-000241 R-CARBON;1.5KOHM,5%,1/8W,AA,TP	
3	RY01	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY04	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY07	2001-000793 R-CARBON;470HM,5%,1/8W,AA,TP,1	
3	RY08	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	JY01	3812-000219 JUMPER-WIRE-SQ,COPPER;TA0.6SN/52M/M(A	
3	O0VER	AA41-00709A PCB-QUEST CONTROL;TXM2792FX,FR-1,1L,A,1.	
3	SW07	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY02	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY03	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY04	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY05	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY06	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	CY01	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11,5	
3	LDY02	0601-000465 LED;ROUND,GRN,5mm,565	
3	RMV01	AA32-00012A MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
3	CNY01	AA39-00100C LEAD CONNECTOR-ASSY;4P,YBNH250-04,35155	
3	CNY02	AA39-20005A LEAD-CONNECTOR,ASSY;-YBNH025-03,67096-0	
3	BAND	AA63-10002A BAND-TIE;-NYLON66V2,-,-,L100,NTR,-,-	
2	L/SPK	AA65-30018A CLAMP-WIRE;-NYLON6.6,-,-,DATL	
2	INLCFC	AA64-02089A INLAY-BACK,PS,SHEET,T0.3,BLK,40X40	

## ASSY COVER REAR

1	A/CREA	AA90-04417A	ASSY COVER REAR;CL21M6WKX/GSU;K57A
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	CB+RCA	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA60-00091J	SPACER-FELT;-FELT,330X10,-,-,BLK,T0.5,-
2	C/B	AA64-02841A	CABINET BACK;DP;21M6,HB,AA64-02331B
2	AC+BC	AA65-30008A	CLAMP-CORD;-PE,HB,BLK,-,-
2	INB	AA64-00892F	INLAY BACK;D2,D3,RCA9P+DVD,PS SHEET,T0.3
2	HT	AA61-00356B	HOLDER-TUNER,F/JACK;-501F,ABS,HB,BLK,-
2	L/RAT	AA68-01547A	LABEL RATING;TETRONEPAPER90(S)B,LATIN
2	FBT	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL
2	YUGO	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL
2	DRESA/	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,-,DATL

## ASSY BOX

1	A/BOX	AA92-07404A	ASSY BOX;CL21M6WKX/XAP;K57A
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-01588L	PACKING CASE;21M6 K57A NT-AMER,D-2 BB,A1

## ASSY P/MATERIAL

1	A/PMAT	AA92-03716E	ASSY P/MATERIAL;21M6
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2	C/SET	AA69-01479A	CUSHION-SET;21M6,PS FOAMED,C=0.02
2	PE-BAG	AA69-01209A	BAG;SHEET,25-27,W54,L60,FOAM,OEM.

## ASSY CPT

1	A/CPT	AA91-05837A	ASSY CPT;A51QDX992X,21,+0MG,BARE,SDI FL
2	TAPE	0203-000432	TAPE-ACETATE;ACETATETO.25W19WH
2	CRT	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85NM,18.0MH,2
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M
2	D-COIL	AA27-00256A	COIL DEGAUSSING;21IHCH,10%,35TS,4.50HM,
2	D-Y	AA27-00198A	DEFLECTION YOKE;21DF,DIF-2192AA(NF),ST-3
2	SPACER	AA63-60028A	SPACER-DY;-NEOPRENE,-BLK,V0V
2	CDCOIL	AA65-00009B	CLAMP-D,COIL;NYLON 66,V0,-,-,21A8,-
2	A/TBC	AA98-70014D	ASSY-TBC,WIRE(P);-22 Q,NTSC,PAL,1P,TVI
2	S/GUM	AA63-60004P	SPACER-GUM,CRT;-NTR RUBBER,-,-,-,GRY,T2

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------	----------	----------	-----------------------------	--------

### ASSY ACCESSORY

1	A/ACCS	AA92-07405A	ASSY ACCESSORY;CL21M6WKX/XAP;K57A				
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y				
2	RMT	AA59-10113H	REMOCON;DP,TM59,-,-,-,-,AA59-10110H,				
2	I/B2	AA68-02647A	MANUAL USERS;CL21M6WKX,SAMEX,ENG,W/P100G				
2	I/B	AA68-02648A	MANUAL USERS;CL21M6WKX,SAMEX,SPA,W/P100G				
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP				
2	W/CARD	AA68-00987A	CARD WARRANTY;W/P100,A4,1P,SELA				
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151				
2	BATT	4301-000120	BATTERY-MN;1.5V,-,AA				
2	T/MAT	AA26-90001F	TRANS-MATCHING;-3000HM/750HM,NTSC,40-89				
2	A/ROD	AA42-00004A	ANT ROD;VHF,4SDODIPOLE850MMBRN				



## 7-5 CL21M6WKX/XAO

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

### ASSY CHASSIS

1	A/CHAS	AA91-05975A	ASSY CHASSIS;CL21M6WKX;LATIN,K57A
2	A/MAIN	AA94-12422A	ASSY PCB MAIN;CL21M6WKX;K57A LATIN
△ 3	D801S	0402-001160	DIODE-BRIDGE;D5SB60,600V,2.8A,SIP-4,ST
3	D404	0402-001296	DIODE-RECTIFIER;FMP-3FU,1500V,5A,T0-3PF
△ 3	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW
3	ICW01	1001-000211	IC-VIDEO SWITCH;NJM2235D,-,DIP,8P,300MIL
3	IC202	1103-001200	IC-EEPROM;M24C08-VBN6,1024x8Bit,DIP,8P,3
3	IC601	1204-001662	IC-SOUND PROCESSOR;MSP3425G-B7,DIP,52P,5
△ 3	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T
△ 3	PT801S	1404-001264	THERMISTOR-PTC;4.50HM,+30/-20%,220V,290V
△ 3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-M(T
△ 3	CR402S	2301-001219	C-FILM,MPE-PPF;3.9nF,5%,1.6KV,TP29x8.5x
△ 3	CR403S	2303-000334	C-FILM,PPF;3nF,5%,1.6KV,BK,31x13.5x8,20
△ 3	CX801S	2306-000318	C-FILM,MPPF;220NF,20%,250V,-,2
△ 3	CR406S	2306-001004	C-FILM,MPPF;300nF,5%,400V,TP,26x14x21mm,
3	C803	2401-001426	C-AL;470UF,400V
3	C821	2401-003633	C-AL;220UF,20%,160V,GP,ST,22X25MM,1
△ 3	SF101S	2904-001107	FILTER-SAW AV;45.75MHz,SIP5K,TP,12.6dB,N
△ 3	SF102S	2904-001418	FILTER-SAW AV;45.75MHz,-,ST,-,-
△ 3	RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO
△ 3	FP801S	3601-000293	FUSE-CARTRIDGE;250V,5A,SLOW-BLOW,GLASS,5
△ 3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NL,-
3	CN902	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
3	JA701	3722-001333	JACK-RCA9P,3.2mm,NL,BLK
3	JA702	3722-001596	JACK-RCA;3P/9P,3.5mm,NL,BLK(GRN/BLU/RED
△ 3	IC201S	AA09-00316A	IC MICOM;TDA9592PS/N1/3I,SPM-464A,64P,3.
△ 3	T444S	AA26-00057A	TRANS-FBT;-FUH-29A001B(S),25/29,130
△ 3	T801S	AA26-00179C	TRANS SWITCHING;EER4950,K57A,CFT2791KX,9
△ 3	T401A	AA26-50001M	TRANS HORIZ DRIVE;-80MH,520UH,4UH,E
3	L808	AA27-00098A	COIL CHOKE;-24uH,10%,-,0.1,3.0A,DR10X
3	L409	AA27-00159A	COIL HORIZ. WIDTH;140UH,140UH,YL-81 DR 1
3	LR401A	AA27-30003L	COIL LINEARITY;-73UH,DR,12X15,0.55MM,BK
△ 3	LX801S	AA29-00011A	FILTER LINE NOISE;CZ32W8,-,0.20MAX,1.5KV
3	WG	AA39-20010B	LEAD-CONNECTOR,ASSY;-YFH800-01,500MM,1P
3	CN503	AA39-20604A	LEAD CONNECTOR-ASSY;-YBNH250-09,YBNH05/
△ 3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
3	IC802	AA96-00245A	ASSY H/S;-,-,AA62-00055A,KA7632,-
4		1203-001939	IC-POSIFIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-,-,T1.0,-,35*15*25,D1,-,-
4	Q401	AA96-00624A	ASSY H/S;-,-,POWER,AA62-00057A,KSD5703,WA
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0502-001136	TR-POWER;KSD5703,NPN,70W,T0-3PF,ST,8-
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA60-30001A	WASHER-PLATE;-M3,JD3.5,15X8.5,T1.0,-,SB
4		AA62-00057A	HEAT SINK-PS;-,-,T1.0,-,41*20*60,D2,-,-
4	IC501	AA96-50311A	ASSY-H/S;-,-,VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	ICVIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-,-,SECC,T1.0,-,33X15X30FT-2
△ 4	IC801S	AA96-50373K	ASSY H/S;-,-,POWER,AA62-30181K,K57A
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-002597	IC-PWM CONTROLLER;KA5Q1265RF-YDTU,T0-3PF
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA61-11028A	BRACKET-IC;SECC,T1.0,-
4		AA62-30181K	HEATSINK-ES;-,-,AL6063EXTR.,2,WHT,40MM,-
4	IC602	AA96-50398A	ASSY-H/S;-,-,AA62-30182E,TDA7297,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001064	IC-POWERAMP;7297,ZIP,15P,-,DUA
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30182E	HEAT-SINK,ES;-,-,A6063 EXTR.,-WHT,-,-,40
3	IC301	AA96-50406A	ASSY-H/S;LA62-30180K,LA7845
4		1204-000517	IC-LINEAR;LA7845SIPVERTICALAMP
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30180K	HEATSINK-ES;-,-,A6063EXTR.,-WHT,50/13,-
△ 4	D805	BP96-00020F	ASSY HEAT SINK P;H/S TR,SCREW,FFFP10U20S
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001375	DIODE-RECTIFIER;FFFP10U20S,200V,10A,T0-2
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,DREAM,-,-,-,-
△ 3	D808	BP96-00020J	ASSY HEAT SINK P;H/S TR,SCREW,FMG-G2CS,0
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001230	DIODE-RECTIFIERFMG-G2CS,1000V,3A,T0-22
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-,-,T1.0,-,DREAM,-,-,-,-
3	CN901	3711-002642	POST-HEADER;67094-003(AUTO)
3	CN604	3711-002644	POST-HEADER;67094-005(AUTO)
3	CN701	3711-002647	POST-HEADER;67094-008(AUTO)
3	Q801	0502-000242	TR-POWER;KSA614,PNP,-80V,-55V,
3	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,150V,1
△ 3	PWR/AC	AA96-20109C	ASSY PWR-CORD;CP2/NO(4.0)H/C300,KKP419C,
4		AA39-10006X	POWER-CORD;-,-,KKP419C,KLCE-2F,2.286MT
4		AA61-20284A	HOLDER P CORD;PPV,0,BLK,KE-002
3	L/PQS	AA68-01018A	LABEL-PQS;-,-,50mmX,13,-,WHITE,-
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3		0202-000187	SOLDER-WIREFLUX;-,-,RS60S,D1.2,6
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0204-001024	FLUX;DF-96TVS,-,-,20%,-
3	A/AUTO	AA97-13471X	ASSY AUTO-MAIN;CL21M6WKX/XAX,K57A
4	D202	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D206	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D304	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D809	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	DZ403	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D802	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
△ 4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D504	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-204A
4	D402	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D951	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△ 4	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1
4	D405	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D406	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D303	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D407	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D409	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D501	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-,
4	DZ101	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ204	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ213	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ214	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ215	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ602	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ805	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ812	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ802	0403-000699	DIODE-ZENER;TZP27B,27V,27-30.8
4	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ811	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ803	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ206	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ208	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ209	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ210	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ211	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ212	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ218	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ219	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ220	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ221	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500

Loc. No.	Code No.	Description ; Specification	Remark
4	DZ222	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ223	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ224	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ501	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ502	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ503	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ808	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ801	0403-001211 DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
4	DZ303	0403-001221 DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
4	DZ804	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
4	DZ301	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ305	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ302	0403-001329 DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
4	DZ810	0403-001373 DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D	
4	D602	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	D201	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	Q205	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q206	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q211	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q301	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q702	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q951	0501-000369 TRANSISTOR;KSC2331-Y(TAPG)	
4	Q203	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q204	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q207	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q208	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q701	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q802	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	IC603	1203-000515 IC-VOL. DETECTOR;7042,TO-92,3P,177MIL,PL	
△	IC803	1203-001217 IC-POST.ADJUSTREG;431,TO-92,3P,4.58MIL,P	
△	VX801S	1405-000187 VARISTOR;750V,1250A,12.5x7mm,TP	
4	R231	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP	
4	R289	2001-000011 R-CARBON;75Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R306	2001-000016 R-CARBON(S);10HM,5%,1/2W,AA,TP	
4	R806	2001-000019 R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
4	R405	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R817	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R809	2001-000109 R-CARBON(S);470OHM,5%,1/2W,AA,	
4	J708	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R316	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R712	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R713	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R103	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R202	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R210	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R211	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R212	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R214	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R215	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R219	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R220	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R272	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R273	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R274	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R275	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R276	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R277	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R288	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R296	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R504	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R505	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R506	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R605	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R606	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R607	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R608	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R613	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R614	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW01	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW02	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW04	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	RW05	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP,	
4	R206	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R213	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R258	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R315	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	

Loc. No.	Code No.	Description ; Specification	Remark
4	R615	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R618	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R619	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R813	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R822	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R835	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP,	
4	R248	2001-000343 R-CARBON;13KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R609	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R611	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R610	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	R612	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP,	
4	J213	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R207	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R218	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R617	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R717	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R260	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R261	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R314	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R833	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R251	2001-000490 R-CARBON;200OHM,5%,1/8W,AA,TP,	
4	R718	2001-000515 R-CARBON;220OHM,5%,1/8W,AA,TP,	
4	R279	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP,	
4	R716	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP,	
4	R101	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R102	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R250	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R719	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP,	
4	R228	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R229	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R814	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R245	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	R401	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP	
4	R270	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP,	
4	R271	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP,	
4	R216	2001-000645 R-CARBON;330KOHM,5%,1/8W,AA,TP	
4	R203	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R208	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R209	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R223	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R230	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R236	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R293	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R294	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R829	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R221	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R222	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R601	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R602	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R603	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R104	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R714	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP,	
4	R246	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4	R217	2001-000857 R-CARBON;560OHM,5%,1/8W,AA,TP,	
4	R136	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R105	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R705	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R706	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R707	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R708	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R711	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R247	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R514	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R812	2001-001067 R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R402	2001-001077 R-CARBON(S);150OHM,5%,1/2W,AA,	
4	R823	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R824	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R828	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R404	2001-001114 R-CARBON(S);270OHM,5%,1/2W,AA,	
4	R825	2001-001131 R-CARBON(S);33KOHM,5%,1/2W,AA,	
4	R803	2001-001150 R-CARBON(S);47KOHM,5%,1/2W,AA,	
4	R804	2001-001150 R-CARBON(S);47KOHM,5%,1/2W,AA,	
4	R827	2001-001168 R-CARBON(S);6.8KOHM,5%,1/2W,AB	
4	R807	2001-001170 R-CARBON(S);6.8OHM,5%,1/2W,AB,	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	R808	2001-001170 R-CARBON(S);6.8OHM,5%,1/2W,AB,		4	C805	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R810	2001-001192 R-CARBON(S);820OHM,5%,1/2W,AB,		4	C824	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R403	2001-001066 R-CARBON(S);1100HM,5%,1/2W,AA,TP2.4X6.4		4	C625	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R501H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C626	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R502H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C301	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
△	R511	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C235	2301-000342 C-FILM,PEF;2.2nF,5%,50V,TP,7.4x3.9x13mm,	
△	RY801S	2002-001012 R-COMPOSITION;8.2MOhm,5%,1/2W,AA,TP,3.7X		4	C102	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	R313	2003-000537 R-METALOXIDE(S);1KOHM,5%,1W,AD		4	C401	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	R408	2003-000540 R-METALOXIDE(S);1KOHM,5%,2W,AD		4	C621	2301-000383 C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
4	R801	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C237	2301-000445 C-FILM,PEF;4.7nF,5%,50V,TP,5.5x7x3mm,5mm	
4	R802	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C414	2301-001065 C-FILM,MPPF;47NF,55,630V,TP,19	
4	R830	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		△	CR407S	2306-000134 C-FILM,MPPF;150nF,5%,400V,TP,19x17x11,7.	
4	R831	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C504	2301-001259 C-FILM,MPPF;100nF,5%,400V,TP,19x8x16,7.5	
4	R841	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C808	2301-001435 C-FILM,PPF;1.5nF,5%,1.2kV,TP,15x8x12.5mm	
4	R818	2003-000998 R-METALOXIDE;300OHM,5%,2W,AF,T		4	C306	2305-000149 C-FILM;CF922N100V7104-J-40/105	
4	R832	2003-001035 R-METALOXIDE(S);27OHM,5%,2W,AF		4	C305	2305-000285 C-FILM,MPEF;220NF,5%,100V,-5M	
4	R419	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1		4	C213	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	R423	2003-002007 R-METAL OXIDE(S);4.7KOHM,5%,2W,AF,TP,3.9		4	C214	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	R407	2003-002008 R-METAL OXIDE(S);18KOHM,5%,2W,AF,TP,3.9X		4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	R819	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	R820	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C225	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	R821	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C231	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	R309	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP,3.9x		4	C236	2305-000289 C-FILM,MPEF;220NF,5%,63V,-5MM	
4	R310	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP,3.9x		4	C404	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-5MM.	
4	R305	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C204	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
4	R307	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C218	2305-000412 C-FILM,MPEF;470NF,5%,63V,-5MM	
△	R834	2004-001377 R-METAL(S);120KOHM,1%,1/2W,AA,TP,2.4X6.4		4	C105	2305-000665 C-FILM;104J, 60V,5MM TAPING	
△	RR401S	2004-001390 R-METAL(S);1KOHM,2%,1/2W,AA,TP		4	C206	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R416	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,		4	C209	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R420	2004-001405 R-METAL(S);79KOHM,1%,1/2W,AA,T		4	C219	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R280	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1		4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R826	2004-001983 R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4		4	C232	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R815	2008-000205 R-FUSIBLE(S);100HM,5%,1/2W,AF,		4	C240	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R413	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,		4	C253	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R414	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,		4	C606	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R312	2008-000290 R-FUSIBLE;2.4OHM,5%,2W,AF,TP,3		4	C618	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R513	2008-000292 R-FUSIBLE;RF2WRT(S)3R3-J		4	C632	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R512	2008-000301 R-FUSIBLE(S);56ohm,5%,2W,AF,TP,3.9x10mm		4	C807	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R308	2008-001076 R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm		4	C812	2305-000665 C-FILM;104J, 60V,5MM TAPING	
△	CR405S	2201-000132 C-CERAMIC,DISC;100PF,10%,500V,Y5P,6X3MM,		4	C244	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP	
4	C601	2201-000304 C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP		4	C608	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C602	2201-000304 C-CERAMIC,DISC;0.01nF,0.25pF,50V,NP0,TP		4	C609	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C801	2201-000332 C-CERAMIC,AC;CK45PTAPGE250V222		4	C610	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C802	2201-000332 C-CERAMIC,AC;CK45PTAPGE250V222		4	C611	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C823	2201-000370 C-CERAMIC,DISC;220PF,10%,50V,Y5P,TP		4	C710	2401-002075 C-AL;4.7uF,20%,50V,GP,TP,5x11,5mm	
4	C408	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C822	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C411	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C207	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C413	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C211	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C818	2201-000556 C-CERAMIC,DISC;470PF,10%,500V,		4	C220	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C208	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NP0		4	C226	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C210	2201-000573 C-CERAMIC,DISC;47PF,5%,50V,NP0		4	C227	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C403	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,		4	C233	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C816	2201-000599 C-CERAMIC,DISC;560PF,10%,500V,		4	C402	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C405	2201-000639 C-CERAMIC,DISC;680PF,10%,2KV,Y5P,-5MM,T		4	C604	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C508	2201-000723 C-CERAMIC,DISC;4.7nF,20%,3KV,Y5U,TP,16x5		4	C619	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	CW04	2201-000982 C-CERAMIC,DISC;10NF,+80-20%,50		4	C811	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C820	2201-000991 C-CERAMIC,HIC;CK45(T)B2KV561-K		4	C304	2401-000326 C-AL;100UF,20%,35V,GP,8X11MM,5	
4	C302	2201-002103 C-CERAMIC,DISC;0.015nF,5%,500V,NP0,TP,6.		4	C303	2401-000365 C-AL;100uF,20%,50V,WT,TP,10x12.5mm,	
4	C505	2202-000106 C-CERAMIC,MLC-AXIAL;1.5nF,20%,16V,Y5P,TP		4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C110	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2		4	C104	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C120	2202-000127 C-CERAMIC,MLC-AXIAL;10NF,+80-2		4	C212	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C603	2202-000286 C-CERAMIC,MLC-AXIAL;56PF,5%,50		4	C239	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C629	2202-000286 C-CERAMIC,MLC-AXIAL;56PF,5%,50		4	C614	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C223	2202-000252 C-CERAMIC,MLC-AXIAL;4.7nF,10%,50V,X7R,TP		4	C607	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C205	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C616	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C242	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C617	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C243	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C627	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C605	2202-000796 C-CERAMIC,MLC-AXIAL;1NF,10%,50		4	C809	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C221	2202-000849 C-CERAMIC,MLC-AXIAL;18pF,5%,50V,CH,TP,3.		4	C238	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C613	2301-000108 C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW01	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C622	2301-000108 C-FILM,PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW02	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C630	2301-000111 C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	C224	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C634	2301-000111 C-FILM,PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	C234	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C623	2301-000192 C-FILM,PEF;1NF,5%,50V,5.3X10MM		4	C412	2401-000927 C-AL;22UF,20%,250V,GP;13X20MM,	
4	C624	2301-000192 C-FILM,PEF;1NF,5%,50V,5.3X10MM		4	C101	2401-000962 C-AL;22uF,20%,50V,GP,TP,5x11,5	
4	C806	2301-000204 C-FILM,PEF;2.7NF,5%,50V,7.4X3.		4	C615	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C245	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9		4	C620	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	C804	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP		4	J210	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C507	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5		4	J211	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C409	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,		4	J212	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C410	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,		4	J215	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C612	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5		4	J217	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	CW05	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP,6.3x11,5		4	J219	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C633	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5		4	J220	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C635	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11,5		4	J221	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C817	2401-002215 C-AL;2200UF,20%,25V,(105RD)13X		4	J222	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C407	2401-002268 C-ELEC;CE04-40/105250VT2R2-MWR		4	J223	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C825	2401-002300 C-ELECTROLYTIC;CE04WTAPG50V47U		4	J224	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C103	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11.5,5		4	J225	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C813	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11.5,5		4	J228	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C229	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5		4	J231	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C810	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11,5		4	J232	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C814	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1		4	J233	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C815	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1		4	J234	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C631	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2		4	J236	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C819	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2		4	J237	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.		4	J240	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L205	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.		4	J249	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L206	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.		4	J250	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L603	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.		4	J251	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L707	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.		4	J252	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L210	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4		4	J253	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L211	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4		4	J255	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
△	L401	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4		4	J256	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L604	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4		4	J257	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L605	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4		4	J274	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L212	2701-000158 INDUCTOR-AXIAL;22UH,10%,2.5X3.		4	J279	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L209	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm		4	J285	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L803	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm		4	J290	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L601	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm		4	J292	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L602	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm		4	J293	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L202	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM		4	J294	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L203	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM		4	J295	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L230	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM		4	J302	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L204	2702-000142 INDUCTOR-RADIAL;22uH,5%,6x6.4mm		4	J304	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	X601	2801-000186 CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,		4	J305	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	X201	2801-003433 CRYSTAL-UNIT;12MHZ,30PPM,28-AAM,30PF,300		4	J306	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
△	L403	2901-000297 FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-		4	J307	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L407	2901-000297 FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-		4	J308	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L501	2901-000297 FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-		4	J403	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L805	2901-000297 FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-		4	J404	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	R816	2901-000297 FILTER-EMI ON BOARD;-,3A,-,-,3.5x5,TP,-		4	J405	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	Z202	2903-000129 CORE-CERAMIC,BR,4.5MHz,-,-,TP,-		4	J407	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J235	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J408	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L302	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J409	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L303	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J410	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L402	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J413	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L404	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J414	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L801	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J415	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L802	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J416	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L804	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J420	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.		4	J421	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	L809	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,-		4	J422	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
△	FD802S	3601-001163 FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M		4	J501	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
△	FD801S	3601-001228 FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO		4	J502	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	F801A	3602-000114 FUSE-HOLDER;-,30MOHM		4	J503	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	F801B	3602-000114 FUSE-HOLDER;-,30MOHM		4	J504	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C203	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J505	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C502	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J601	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	C503	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J602	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J101	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J603	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J604	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J614	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J615	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J616	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J619	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J620	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J109	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J621	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J624	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J201	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J625	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J202	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J626	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J203	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J627	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J204	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J628	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	
4	J205	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A		4	J629	3812-000219 JUMPER-WIRE-SO,COPPER;TAO.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4 J630	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J631	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J632	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J635	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J636	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J704	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J705	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J706	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J711	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J712	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J716	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J717	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J718	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J719	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J720	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J801	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J802	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J803	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J804	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J805	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J806	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J808	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J809	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J810	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J811	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J813	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J815	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J817	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J820	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J822	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J826	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J827	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J828	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J829	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J830	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J831	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J832	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J833	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J836	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J837	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J841	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 J842	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 R501	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 R502	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 R503	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 R715	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
△ 4 RY802S	3812-000219	JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M(A	
4 02VER	AA41-00656C	PCB-MAIN;CT-29K5(QUEST),FR-1,1L,C,1.6T3	
4 EY301	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY302	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY303	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY304	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY401	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY402	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY403	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY404	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY407	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY408	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY409	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY410	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY411	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY412	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY413	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY414	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY419	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY420	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY421	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY423	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY424	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY425	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY426	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY427	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY428	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY429	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY430	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY431	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	
4 EY432	AA60-40011A	EYELET;:ID2.0,OD2.8,-,BST	

[illegible]

Loc. No.	Code No.	Description ; Specification	Remark
4	EL404	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL405	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL406	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL407	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL501	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL502	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL805	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL806	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL807	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	EL808	AA60-40011B EYELET;-ID2.2,0D3.2,-,BSP	
4	GT102	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT404	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT502	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT503	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,AUTO	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	R256	2004-000433 R-METAL;1KOHM,1%,1/8W,AA,TP,1.	
4	C709	2202-000806 C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
4	R292	2001-000012 R-CARBON;680Kohm,5%,1/8W,AA,TP,1.8x3.2m	

## ASSY COVER FRONT

1	A/CFRO	AA90-03573F	ASSY COVER FRONT;CL21M6WKX/XAX
2	PCB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPK+CF	6006-001095	SCREW-ASSY TAPT;WPBH,+,M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050R	SCREW-ASSY;WC,HH,+,M5,L31.5,SWR
2	AV+CF	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)
2	F/C	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,
3	KC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	WR+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	SFFC	AA60-00091F	SPACER-FELT;-FELT,150X10,-,BLK,T0.5,-
3	HP	AA61-00711B	HOLDER-PCB;29U1,U2,HIPS FV2,BK502(HB-PRO
3	SPRING	AA61-60003J	SPRING-CS;-,-,SUS304,0.5,0D6,H
3	CC	AA63-00613A	COVER-CONTROL;DP;21M6,AA63-00540A
3	KP	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11
3	KC	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10
3	WR	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR
3	DP	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV
3	C/F	AA64-02852C	CABINET-FRONT;DP;21M6,AA64-02330G
3	TAPE	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	INLAV	AA64-60448W	INLAY AV;S51A,PS SHEET,T0.3,BLK,SILVER E
2	BADGE	AA64-70123A	BADGE-BRAND;AL,SAMSUNG,SILVER,L=50,FLAT,
2	AHS	AA91-00427A	ASSY HOLDER SPK;-PP80HM/15W,BLK,SEMI-D
2	CWFCR	AA65-00011C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,25M
2	CFWFL	AA65-30105A	CLAMP-WIRE;NYLON 66N,VO,NTR,15MM
2	APAVS	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WKX,K57A
3	RA01	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	RA02	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	CA06	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11.5
3	CA07	2401-000025	C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11.5
3	JA101	3812-000219	JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A
3	O3VER	AA41-11017D	PCB-A/V SIDE;CT-29U1,FR-1,1L,D,1.6T,245X
3	JE01	3722-000143	JACK-PHONE;1P3.4MM,-,MBAG
3	JA01	3722-001031	JACK-RCA;3P3.6MM,#18,AU
3	CN06A	AA39-00070A	LEAD CONNECTOR-ASSY;4P,200mm,YBNH250-04,
3	CN01A	AA39-20068E	LEAD CONNECTOR-ASSY;-YBNH025-08,67096-0
3	CN05A	AA39-20069C	LEAD CONNECTOR-ASSY;5P,YBNH025-05,67096
3	BAND	AA63-10002A	BAND-TIE;-NYLON66V2,-,L100,NTR,-,-
2	APC	AA96-01189A	ASSY PCB P-CONTROL,CL21M6WKX;K57A
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
3	RY03	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
3	RY06	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
3	RY02	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP

Loc. No.	Code No.	Description ; Specification	Remark
3	RY05	2001-000241 R-CARBON;1.5KOHM,5%,1/8W,AA,TP	
3	RY01	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY04	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
3	RY07	2001-000793 R-CARBON;470HM,5%,1/8W,AA,TP,1	
3	RY08	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
3	JY01	3812-000219 JUMPER-WIRE-SO,COPPER;TA0.6SN/52M/M(A	
3	O0VER	AA41-00709A PCB-QUEST CONTROL;TXM2792FX,FR-1,1L,A,1.	
3	SW07	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY02	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY03	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY04	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY05	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	SWY06	3404-000176 SWITCH-TACT;12V,50MA,90-150GF,	
3	CY01	2401-000025 C-ALUMINUM;100uF,20%,16V,GP,TP6.3x11.5	
3	LDY02	0601-000465 LED;ROUND,GRN,5mm,565	
3	RMY01	AA32-00012A MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES	
3	CNY01	AA39-00100C LEAD CONNECTOR-ASSY;4PYBNH250-04,35155	
3	CNY02	AA39-20005A LEAD-CONNECTOR,ASSY;-YBNH025-03,67096-0	
3	BAND	AA63-10002A BAND-TIE;-NYLON66V2,-,L100,NTR,-,-	
2	L/SPK	AA65-30018A CLAMP-WIRE;-NYLON6.6,-,DATL	
2	INLCFC	AA64-02089A INLAY-BACK,PS,SHEET,T0.3,BLK,40X40	

## ASSY COVER REAR

1	A/CREA	AA90-04417A	ASSY COVER REAR;CL21M6WKX/GSU;K57A
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	CB+RCA	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA60-00091J	SPACER-FELT;-FELT,330X10,-,BLK,T0.5,-
2	C/B	AA64-02841A	CABINET BACK;DP;21M6,HB,AA64-02331B
2	AC+BC	AA65-30008A	CLAMP-CORD;-PE,HB,BLK,-,-
2	INB	AA64-00892F	INLAY BACK;D2,D3,RCA9P+DVD,PS SHEET,T0.3
2	HT	AA61-00356B	HOLDER-TUNER,F/JACK;-501F,ABS,HB,BLK,-
2	L/RAT	AA68-01547A	LABEL RATING;TETRONEPAPER90(S)B,LATIN
2	FBT	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL
2	YUGO	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL
2	DRESA/	AA65-30018A	CLAMP-WIRE;-NYLON6.6,-,DATL

## ASSY BOX

1	A/BOX	AA92-07404A	ASSY BOX;CL21M6WKX/XAP;K57A
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-01588L	PACKING CASE;21M6 K57A NT-AMER,D-2 BB,A1

## ASSY P/MATERIAL

1	A/PMAT	AA92-03716E	ASSY P/MATERIAL;21M6
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,-,H18,33X17.8X2
2	C/SET	AA69-01479A	CUSHION-SET;21M6,PS FOAMED,C=0.02
2	PE-BAG	AA69-01209A	BAG;SHEET,25-27,W54,L60,FOAM,OEM.

## ASSY CPT

1	A/CPT	AA91-05837A	ASSY CPT;A51QDX992X,21,+0MG,BARE,SDI FL
2	TAPE	0203-000432	TAPE-ACETATE;ACETATETO.25W19WH
2	CRT	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-OB,29.1M
2	D-COIL	AA27-00256A	COIL DEGAUSSING;21HCH,10%,35TS,4.50HM,
2	D-Y	AA27-00198A	DEFLECTION YOKE;21DF,DIF-2192AA(NF),ST-3
2	SPACER	AA63-60028A	SPACER-DY;-NEOPRENE,-,BLK,V0V
2	CDCOIL	AA65-00009B	CLAMP-D.COIL;NYLON 66,V0,-,-,21A8,-
2	A/TBC	AA98-70014D	ASSY-TBC,WIRE(P);-22 Q,NTSC,PAL,1P,TVI
2	S/GUM	AA63-60004P	SPACER-GUM,CRT;-NTR RUBBER,-,-,GRY,T2

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

## ASSY ACCESSORY

1	A/ACCS	AA92-07405A	ASSY ACCESSORY;CL21M6WKX/XAP;K57A
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	RMT	AA59-10113H	REMOCON;DP;TM59,-,-,-,-,AA59-10110H,
2	I/B2	AA68-02647A	MANUAL USERS;CL21M6WKX,SAMEX,ENG,W/P100G
2	I/B	AA68-02648A	MANUAL USERS;CL21M6WKX,SAMEX,SPA,W/P100G
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP
2	W/CARD	AA68-00987A	CARD WARRANTY;W/P100,A4,1P;SELA
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151
2	BATT	4301-000120	BATTERY-MN;1.5V,-,AA
2	T/MAT	AA26-90001F	TRANS-MATCHING;-;300OHM/75OHM,NTSC,40-89
2	A/ROD	AA42-00004A	ANT ROD;VHF;4SDODIPOLE850MMBRN

## 7-6 CL21M6WKX/RCL

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

### ASSY CHASSIS

1	A/CHAS	AA91-05975A	ASSY CHASSIS;CL21M6WKX;LATIN,K57A
2	A/MAIN	AA94-12422A	ASSY PCB MAIN;CL21M6WKX;K57A LATIN
△ 3	D801S	0402-001160	DIODE-BRIDGE;D5SB60,600V,2.8A,SIP-4,ST
3	D404	0402-001296	DIODE-RECTIFIER;FMP-3FU,1500V,5A,TO-3PF
△ 3	PC801S	0604-001038	PHOTOCOUPLER;TR,130-260%,200MW
3	ICW01	1001-000211	IC-VIDEO SWITCH;NJ,M2235D,-,DIP,8P,300MIL
3	IC202	1103-001200	IC-EEPROM;M24C08-WBN6,1024x8Bit,DIP,8P,3
3	IC601	1204-001662	IC-SOUND PROCESSOR;MSP3425G-B7,DIP,52P,5
△ 3	NT801S	1404-001045	THERMISTOR NTC;4.70HM,15%,2900K,35.0MW,T
△ 3	PT801S	1404-001264	THERMISTOR-PTC;4.50HM,+30/-20%,220V,290V
△ 3	CY801S	2201-000446	C-CERAMIC,AC;CK45PE400V332-MIT
△ 3	CR402S	2301-001219	C-FILM,MPE-PPF;3.9nF,5%,1.6KV,TP,29x8.5x
△ 3	CR403S	2303-000334	C-FILM,PPF;3nF,5%,1.6KV,BK,31x13.5x8,20
△ 3	CX801S	2306-000318	C-FILM,MPPF;220nF,20%,250V,-,2
△ 3	CR406S	2306-001004	C-FILM,MPPF;300nF,5%,400V,TP,26x14x21mm,
3	C803	2401-001426	C-AL;470UF,400V
3	C821	2401-003633	C-AL;220UF,20%,160V,GP,ST,22X25MM,1
△ 3	SF101S	2904-001107	FILTER-SAW AV;45.75MHz,SIP5K,TP,12.6dB,N
△ 3	SF102S	2904-001418	FILTER-SAW AV;45.75MHz,-,ST,-,-
△ 3	RL801S	3501-001040	RELAYPOWER;12VDC,500MW,10A,1FO
△ 3	FP801S	3601-000293	FUSE-CARTRIDGE;250V,5A,SLOW-BLOW,GLASS,5
△ 3	V999S	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-
3	CN902	3711-003043	CONNECTOR-HEADER;BOX,4P,1R,2.5mm,STRAIGH
3	JA701	3722-001333	JACK-RCA9P;3.2mm,NI,BLK
3	JA702	3722-001596	JACK-RCA;3P/9P;3.5mm,NI,BLK(GRN/BLU/RED
△ 3	IC201S	AA09-00316A	IC MICOM;TDA9592PS/N1/3I,SPM-464A,64P,3
△ 3	T444S	AA26-00057A	TRANS-FBT;-FUH-29A001B(S),25/29,130
△ 3	T801S	AA26-00179C	TRANS SWITCHING;EER4950,K57A,CF2791KX,9
△ 3	T401A	AA26-50001M	TRANS HORIZ DRIVE;-80MH,520UH,4UH,E
3	L808	AA27-00098A	COIL CHOKE;-24uH,10%,-,0.1,3.0A,DR10X
3	L409	AA27-00159A	COIL HORIZ. WIDTH;140UH,140UH,YL-81 DR 1
△ 3	LR401A	AA27-30003L	COIL LINEARITY;-73UH,DR,12X15,0.55MM,BK
△ 3	LX801S	AA29-00011A	FILTER LINE NOISE;CZ32W8,-,0.20MAX,1.5KV
3	WG	AA39-20010B	LEAD-CONNECTOR,ASSY;-YFH800-01,500MM,1P
3	CN503	AA39-20604A	LEAD CONNECTOR-ASSY;-YBNH250-09,YBNH05/
△ 3	TU01S	AA40-00073A	TUNER-TECC1040PG32A(S),181CH,45.75MHZ,75
△ 3	IC802	AA96-00245A	ASSY H/S;-,-AA62-00055A,KA7632,-
4		1203-001939	IC-POSIX.FIXED REG.;7632,SIP,10P,-,PLASTI
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-00055A	HEAT SINK-PS;-,-T1.0,-,35*15*25,D1,-,-
3	Q401	AA96-00624A	ASSY H/S;-,-POWER,AA62-00057A,KSD5703,WA
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0502-001136	TR-POWER;KSD5703,NPN,70W,TO-3PF,ST,8-
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA60-30001A	WASHER-PLATE;-M3,ID3.5,15X8.5,T1.0,-,SB
4		AA62-00057A	HEAT SINK-PS;-,-T1.0,-,41*20*60,D2,-,-
3	IC501	AA96-50311A	ASSY H/S;-,-VIDEO,AA62-30175D,TDA6107Q,-
4		1201-001159	IC-VIDEOAMP;TDA6107Q,ZIP,9P,300
4		6003-000334	SCREW-TAPTITE;RH,+2S,M3,L6,ZP
4		AA62-30175D	HEATSINK-PS;-,-SECC,T1.0,-,33X15X30FT-2
△ 3	IC801S	AA96-50373K	ASSY H/S;-,-POWER,AA62-30181K,K57A
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1203-002597	IC-PWM CONTROLLER;KA5Q1265RF-YDTU,TO-3PF
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA61-11028A	BRACKET-IC;SECC,T1.0,-,
4		AA62-30181K	HEATSINK-ES;-AL6063EXTR.,2.WHT,40MM,-
3	IC602	AA96-50398A	ASSY H/S;-,-AA62-30182E,TDA7297,-
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		1201-001064	IC-POWERAMP;7297,ZIP,15P;-,-DUA
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30182E	HEAT-SINK-ES;-A6063 EXTR.,-WHT,-,-,40
3	IC301	AA96-50406A	ASSY H/S;LA62-30180K,LA7845
4		1204-000517	IC-LINEAR;LA7845SIPVERTICALAMP
4		6003-000333	SCREW-TAPTITE;RH,+2S,M3,L10,ZPC(YEL),SW
4		AA62-30180K	HEATSINK-ES;-A6063EXTR.,-WHT,50/13,-
△ 3	D805	BP96-00020F	ASSY HEAT SINK P;H/S TR,SCREW,FFFP10U20S
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001375	DIODE-RECTIFIER;FFFP10U20S,200V,10A,TO-2
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR

Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------

4		AA62-00045A	HEAT SINK-PS;-,-T1.0,-,-DREAM,-,-,-,-
△ 3	D808	BP96-00020J	ASSY HEAT SINK P;H/S TR,SCREW,FMG-G2CS,0
4		0205-000129	GREASE-SILICON;SC102,JAPAN
4		0402-001230	DIODE-RECTIFIERFMG-G2CS,1000V,3A,TO-22
4		6003-000335	SCREW-TAPTITE;RH,+2S,M3,L8,ZPC(YEL),SWR
4		AA62-00045A	HEAT SINK-PS;-,-T1.0,-,-DREAM,-,-,-,-
3	CN901	3711-002642	POST-HEADER;67094-003(AUTO)
3	CN604	3711-002644	POST-HEADER;67094-005(AUTO)
3	CN701	3711-002647	POST-HEADER;67094-008(AUTO)
3	Q801	0502-000242	TR-POWER;KSA614,PNP,-80V,-55V,
3	Q402	0502-001007	TR-POWER;KSC2073-H2,NPN,150V,1
△ 3	PWR/AC	AA96-20109C	ASSY PWR-CORD;CP2/NQ(4.0)H/C300,KKP419C,
4		AA39-10006X	POWER-CORD;-KKP419C,KLCE-2F,2.286MT
4		AA61-20284A	HOLDER P CORD;PPVO,BLK,KE-002
3	L/PQS	AA68-01018A	LABEL-PQS,-,50mmX,13,-,WHITE,-
3		0202-000008	SOLDER-WIRE;S63S-D3.0,S63A,D3,63/37
3		0202-000187	SOLDER-WIREFLUX;-RS60S,D1.2.6
3		0204-000442	SOLVENT;CH3-CH5H-CH396%IM-1000
3		0204-001024	FLUX;DF-96TVS,-,20%,-
3	A/AUTO	AA97-13471X	ASSY AUTO-MAIN;CL21M6WKX/XAX,K57A
4	D202	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D206	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	D304	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D804	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D809	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D811	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
4	DZ403	0401-000005	DIODE;1N4148,100V,300mA,1V,8nS,TAPING
△ 4	D802	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
△ 4	D803	0401-000006	DIODE-SWITCHING;BAV21,250MA,400MW,50NS,2
4	D504	0402-000010	DIODE-RECTIFIER;RGP15G,400V,1.5A,DO-204A
4	D402	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D403	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
4	D951	0402-000132	DIODE-RECTIFIER;1N4004,400V,1A,DO-41
△ 4	D807	0402-000493	DIODE-RECTIFIER;1R5GU41,400V,1
4	D405	0402-000534	DIODE-RECTIFIER;RG10V,400V,1.5
4	D401	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D406	0402-000540	DIODE-RECTIFIER;RU20A,600V,1.5
4	D303	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D407	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D409	0402-000546	DIODE-RECTIFIER;TVR10G,400V,1.
4	D501	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-
4	D502	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-
4	D503	0402-001105	DIODE-RECTIFIER;ERB43-04SV1,400V,1.0A,-
4	DZ101	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ204	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ213	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ214	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ215	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ402	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ601	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ602	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ805	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ806	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ809	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ812	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
4	DZ802	0403-000699	DIODE-ZENER;TZP27B,27V,27-30.8
4	DZ306	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ811	0403-000700	DIODE-ZENER;TZP33A,33V,31-35V,
4	DZ803	0403-000716	DIODE-ZENER;MTZJ4.7B,4.7V,4.55-4.8V,500m
4	DZ202	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ205	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ206	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ207	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ208	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ209	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ210	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ211	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ212	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ216	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ218	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ219	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ220	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500
4	DZ221	0403-000720	DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500



Loc. No.	Code No.	Description ; Specification	Remark
4	DZ222	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ223	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ224	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ501	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ502	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ503	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ504	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ808	0403-000720 DIODE-ZENER;MTZJ9.1B,9.1V,8.57-9.01V,500	
4	DZ801	0403-001211 DIODE-ZENER;MTZJ12B,11.44-12.03V,500MW,D	
4	DZ303	0403-001221 DIODE-ZENER;UZ39BSB,35.36-37.19V,500MW,D	
4	DZ804	0403-001327 DIODE-ZENER;MTZJ18A,16.22-17.06V,500mW,D	
4	DZ301	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ305	0403-001328 DIODE-ZENER;MTZJ22A,20.15-21.20V,500mW,D	
4	DZ302	0403-001329 DIODE-ZENER;MTZJ24B,22.61-23.77V,500mW,D	
4	DZ810	0403-001373 DIODE-ZENER;MTZJ5.1A,4.81V-5.07V,500mW,D	
4	D602	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	DZ01	0404-000156 DIODE-SCHOTTKY;RB441Q,10V,100MA,DO-34,TP	
4	QZ05	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	QZ06	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	QZ11	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q301	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q702	0501-000283 TRANSISTOR;KSA539-Y(TAPG)/YTAM	
4	Q951	0501-000369 TRANSISTOR;KSC2331-Y(TAPG)	
4	QZ03	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	QZ04	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	QZ07	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	QZ08	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q701	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
4	Q802	0501-000389 TRANSISTOR;KSC815-Y(TAPG)/YTAM	
△	IC603	1203-000515 IC-VOL DETECTOR;7042,TO-92,3P,177MIL,PL	
△	IC803	1203-001217 IC-POST,ADJUSTREG;431,TO-92,3P,4.58MIL,P	
△	VX801S	1405-000187 VARISTOR;750V,1250A,12.5x7mm,TP	
4	R231	2001-000005 R-CARBON;390OHM,5%,1/8W,AA,TP	
4	R289	2001-000011 R-CARBON;75Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R306	2001-000016 R-CARBON(S);10HM,5%,1/2W,AA,TP	
4	R806	2001-000019 R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
4	R405	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R817	2001-000020 R-CARBON(S);220HM,5%,1/2W,AA,T	
4	R809	2001-000109 R-CARBON(S);470OHM,5%,1/2W,AA,	
4	J708	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R316	2001-000258 R-CARBON;1.8Kohm,5%,1/8W,AA,TP,1.8x3.2m	
4	R712	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R713	2001-000273 R-CARBON;100KOHM,5%,1/8W,AA,TP	
4	R103	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R202	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R210	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R211	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R212	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R214	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R215	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R219	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R220	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R272	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R273	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R274	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R275	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R276	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R277	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R288	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R296	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R504	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R505	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R506	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R605	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R606	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R607	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R608	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R613	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R614	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	RW01	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	RW02	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	RW04	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	RW05	2001-000281 R-CARBON;100OHM,5%,1/8W,AA,TP	
4	R206	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R213	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R258	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R315	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	

Loc. No.	Code No.	Description ; Specification	Remark
4	R615	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R618	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R619	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R813	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R822	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	R835	2001-000290 R-CARBON;10KOHM,5%,1/8W,AA,TP	
4	RZ48	2001-000343 R-CARBON;130OHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R609	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP	
4	R611	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP	
4	R610	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP	
4	R612	2001-000347 R-CARBON;13KOHM,5%,1/8W,AA,TP	
4	J213	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R207	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R218	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R617	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R717	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R260	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R261	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R314	2001-000449 R-CARBON;2.2KOHM,5%,1/8W,AA,TP	
4	R833	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R907	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	R908	2001-000472 R-CARBON;2.7KOHM,5%,1/8W,AA,TP	
4	RZ51	2001-000490 R-CARBON;200OHM,5%,1/8W,AA,TP	
4	R718	2001-000515 R-CARBON;220OHM,5%,1/8W,AA,TP	
4	RZ79	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP	
4	R716	2001-000522 R-CARBON;22KOHM,5%,1/8W,AA,TP	
4	R101	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	R102	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	R250	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	R719	2001-000554 R-CARBON;270OHM,5%,1/8W,AA,TP	
4	RZ28	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	RZ29	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R814	2001-000563 R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
4	R245	2001-000591 R-CARBON;3.3KOHM,5%,1/8W,AA,TP	
4	R401	2001-000613 R-CARBON;3.9KOHM,5%,1/8W,AA,TP	
4	RZ70	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP	
4	RZ71	2001-000628 R-CARBON;300OHM,5%,1/8W,AA,TP	
4	R216	2001-000645 R-CARBON;330KOHM,5%,1/8W,AA,TP	
4	RZ03	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ08	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ09	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ23	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ30	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ36	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ93	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ94	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	R829	2001-000734 R-CARBON;4.7KOHM,5%,1/8W,AA,TP	
4	RZ21	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	RZ22	2001-000739 R-CARBON;4.7MOHM,5%,1/8W,AA,TP	
4	R601	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R602	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R603	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R604	2001-000780 R-CARBON;470ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R104	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP	
4	R714	2001-000786 R-CARBON;47KOHM,5%,1/8W,AA,TP	
4	RZ46	2001-000793 R-CARBON;47OHM,5%,1/8W,AA,TP,1	
4	R217	2001-000857 R-CARBON;560OHM,5%,1/8W,AA,TP	
4	R136	2001-000924 R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
4	R105	2001-000947 R-CARBON;7.5KOHM,5%,1/8W,AA,TP	
4	R705	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R706	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R707	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R708	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R711	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	RZ47	2001-000969 R-CARBON;75OHM,5%,1/8W,AA,TP,1	
4	R514	2001-001062 R-CARBON(S);10MOHM,5%,1/2W,AA,	
4	R812	2001-001067 R-CARBON(S);11KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R402	2001-001077 R-CARBON(S);150OHM,5%,1/2W,AA,	
4	R823	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R824	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R828	2001-001088 R-CARBON(S);1KOHM,5%,1/2W,AA,TP,2.4X6.4	
4	R404	2001-001114 R-CARBON(S);270OHM,5%,1/2W,AA,	
4	R825	2001-001131 R-CARBON(S);33KOHM,5%,1/2W,AA,	
4	R803	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R804	2001-001150 R-CARBON(S);470KOHM,5%,1/2W,AA	
4	R827	2001-001168 R-CARBON(S);6.8KOHM,5%,1/2W,AB	
4	R807	2001-001170 R-CARBON(S);6.8OHM,5%,1/2W,AB,	

Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
4	R808	2001-001170 R-CARBON(S);6.80HM,5%,1/2W,AB,		4	C805	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R810	2001-001192 R-CARBON(S);8200HM,5%,1/2W,AB,		4	C824	2301-000224 C-FILM,PEF;22NF,5%,50V,7.4X3.9	
4	R403	2001-001066 R-CARBON(S);1100HM,5%,1/2W,AA,TP,2.4X6.4		4	C625	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R501H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C626	2301-000232 C-FILM,PEF;3.3NF,5%,50V,8.1X4.	
4	R502H	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C301	2301-000254 C-FILM,PEF;39NF,5%,50V,7.5X3.5X6.5MM,5MM	
4	R511	2002-001009 R-COMPOSITION;2.7KOHM,10%,1/2W,AA,TP,3.7		4	C235	2301-000342 C-FILM,PEF;2.2nf,5%,50V,TP,7.4x3.9x13mm,	
△	RY801S	2002-001012 R-COMPOSITION;8.2MOhm,5%,1/2W,AA,TP,3.7X		4	C102	2301-000383 C-FILM,PEF;10nfF,5%,50V,TP,6x7x3.2mm,5mm	
4	R313	2003-000537 R-METALOXIDE(S);1KOHM,5%,1W,AD		4	C401	2301-000383 C-FILM,PEF;10nfF,5%,50V,TP,6x7x3.2mm,5mm	
4	R408	2003-000540 R-METALOXIDE(S);1KOHM,5%,2W,AD		4	C621	2301-000383 C-FILM,PEF;10nfF,5%,50V,TP,6x7x3.2mm,5mm	
4	R801	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C237	2301-000445 C-FILM,PEF;4.7nf,5%,50V,TP,5.5x7x3mm,5mm	
4	R802	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C414	2301-001065 C-FILM,MPPF;47NF,55,630V,TP,19	
4	R830	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		△	CR407S	2306-000134 C-FILM,MPPF;150nf,5%,400V,TP,19x17x11,7.	
4	R831	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C504	2301-001259 C-FILM,MPPF;100nf,5%,400V,TP,19x8x16,7.5	
4	R841	2003-000586 R-METALOXIDE(S);22KOHM,5%,2W,A		4	C808	2301-001435 C-FILM,PPF;1.5nf,5%,1.2kV,TP,15x8x12.5mm	
4	R818	2003-000998 R-METALOXIDE;3000HM,5%,2W,AF,T		4	C306	2305-000149 C-FILM;CF922N100VT104-J-40/105	
4	R832	2003-001035 R-METALOXIDE(S);27OHM,5%,2W,AF		4	C305	2305-000285 C-FILM,MPEF;220NF,5%,100V,-,5M	
4	R419	2003-001040 R-METALOXIDE(S);47Kohm,5%,2W,AF,TP,3.9x1		4	C213	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R423	2003-002007 R-METAL OXIDE(S);4.7KOHM,5%,2W,AF,TP,3.9		4	C214	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R407	2003-002008 R-METAL OXIDE(S);18KOHM,5%,2W,AF,TP,3.9X		4	C215	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R819	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C216	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R820	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C225	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R821	2003-002064 R-METALOXIDE;7.5OHM,5%,2W,AF,T		4	C231	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R309	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP,3.9x		4	C236	2305-000289 C-FILM,MPEF;220NF,5%,63V,-,5MM	
4	R310	2003-002180 R-METAL OXIDE(S);390ohm,5%,2W,AG,TP,3.9x		4	C404	2305-000382 C-FILM,MPEF;4.7NF,5%,400V,TP,-,5MM.	
4	R305	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C204	2305-000412 C-FILM,MPEF;470NF,5%,63V,-,5MM	
4	R307	2004-001371 R-METAL(S);1.5KOHM,1%,1/2W,AA,		4	C218	2305-000412 C-FILM,MPEF;470NF,5%,63V,-,5MM	
4	R834	2004-001377 R-METAL(S);120KOHM,1%,1/2W,AA,TP,2.4X6.4		4	C105	2305-000665 C-FILM;104J, 60V,5MM TAPING	
△	RR401S	2004-001390 R-METAL(S);1KOHM,2%,1/2W,AA,TP		4	C206	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R416	2004-001402 R-METAL(S);6.8KOHM,1%,1/2W,AA,		4	C209	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R420	2004-001405 R-METAL(S);79KOHM,1%,1/2W,AA,T		4	C219	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R280	2004-001914 R-METAL;39KOHM,2%,1/8W,AA,TP,1		4	C222	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R826	2004-001983 R-METAL;2.49KOHM,1%,1/2W,AA,TP,2.4X6.4		4	C232	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R815	2008-000205 R-FUSIBLE(S);100HM,5%,1/2W,AF,		4	C240	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R413	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,		4	C253	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R414	2008-000253 R-FUSIBLE(S);0.47OHM,5%,1W,AF,		4	C606	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R312	2008-000290 R-FUSIBLE;2.4OHM,5%,2W,AF,TP,3		4	C618	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R513	2008-000292 R-FUSIBLE;RF2WRT(S)3R3-J		4	C632	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R512	2008-000301 R-FUSIBLE(S);56ohm,5%,2W,AF,TP,3.9x10mm		4	C807	2305-000665 C-FILM;104J, 60V,5MM TAPING	
4	R308	2008-001076 R-FUSIBLE(S);1.8ohm,5%,2W,AF,TP,3.9x10mm		4	C812	2305-000665 C-FILM;104J, 60V,5MM TAPING	
△	CR405S	2201-000132 C-CERAMIC, DISC;100PF,10%,500V,Y5P6X3MM,		4	C244	2309-000138 C-FILM,PE-PPF;100NF,5%,50V,TP	
4	C601	2201-000304 C-CERAMIC, DISC;0.001nf,0.25pf,50V,NP0,TP		4	C608	2401-000027 C-AL;4.7UF,20%,50V,GP,5*11MM,5MEA	
4	C602	2201-000304 C-CERAMIC, DISC;0.001nf,0.25pf,50V,NP0,TP		4	C609	2401-000027 C-AL;4.7UF,20%,50V,GP,5*11MM,5MEA	
4	C801	2201-000332 C-CERAMIC, AC;CK45PTAPGE250V222		4	C610	2401-000027 C-AL;4.7UF,20%,50V,GP,5*11MM,5MEA	
4	C802	2201-000332 C-CERAMIC, AC;CK45PTAPGE250V222		4	C611	2401-000027 C-AL;4.7UF,20%,50V,GP,5*11MM,5MEA	
4	C823	2201-000370 C-CERAMIC, DISC;220PF,10%,50V,Y5P,TP		4	C710	2401-000027 C-AL;4.7UF,20%,50V,GP,5*11MM,5MEA	
4	C408	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C822	2401-000262 C-AL;100UF,20%,160V,GP,16X25MM,5MM,	
4	C411	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C207	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C413	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C211	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C818	2201-000556 C-CERAMIC, DISC;470PF,10%,500V,		4	C220	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C208	2201-000573 C-CERAMIC, DISC;47PF,5%,50V,NP0		4	C226	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C210	2201-000573 C-CERAMIC, DISC;47PF,5%,50V,NP0		4	C227	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C403	2201-000599 C-CERAMIC, DISC;560PF,10%,500V,		4	C233	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C816	2201-000599 C-CERAMIC, DISC;560PF,10%,500V,		4	C402	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C405	2201-000639 C-CERAMIC, DISC;680PF,10%,2KV,Y5P,-,5MM,T		4	C604	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C508	2201-000723 C-CERAMIC, DISC;4.7nf,20%,3KV,Y5U,TP,16x5		4	C619	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	CW04	2201-000982 C-CERAMIC, DISC;10NF,+80-20%,50		4	C811	2401-000302 C-AL;100UF,20%,25V,GP,6X11MM,5	
4	C820	2201-000991 C-CERAMIC, HIC;CK45(T)B2KV561-K		4	C304	2401-000326 C-AL;100UF,20%,35V,GP,8X11MM,5	
4	C302	2201-002103 C-CERAMIC, DISC;0.015nf,5%,500V,NP0,TP,6		4	C303	2401-000365 C-AL;100uf,20%,50V,WT,TP,10x12.5mm,	
4	C505	2202-000106 C-CERAMIC, MLC-AXIAL;1.5nf,20%,16V,Y5P,TP		4	C506	2401-000430 C-ELECTROLYTIC;CE04WTAPG250V10	
4	C110	2202-000127 C-CERAMIC, MLC-AXIAL;10NF,+80-2		4	C104	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C120	2202-000127 C-CERAMIC, MLC-AXIAL;10NF,+80-2		4	C212	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C603	2202-000286 C-CERAMIC, MLC-AXIAL;56PF,5%,50		4	C239	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C629	2202-000286 C-CERAMIC, MLC-AXIAL;56PF,5%,50		4	C614	2401-000480 C-AL;10UF,20%,50V,GP,5X11MM,5M	
4	C223	2202-000252 C-CERAMIC, MLC-AXIAL;4.7nf,10%,50V,X7R,TP		4	C607	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C205	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C616	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C242	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C617	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C243	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C627	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C605	2202-000796 C-CERAMIC, MLC-AXIAL;1NF,10%,50		4	C809	2401-000493 C-AL;10UF,20%,50V,WT,5X11MM,5M	
4	C221	2202-000849 C-CERAMIC, MLC-AXIAL;18pf,5%,50V,CH,TP,3.		4	C238	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C613	2301-000108 C-FILM, PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW01	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C622	2301-000108 C-FILM, PEF;1.5NF,5%,50V,6.5X3.0X5.5MM,5M		4	CW02	2401-000603 C-AL;1UF,20%,50V,GP,5X11MM,5MM	
4	C630	2301-000111 C-FILM, PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	C224	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C634	2301-000111 C-FILM, PEF;1.8NF,5%,50V,6.5X3.0X5.5MM,5M		4	C234	2401-000660 C-ELECTROLYTIC;CE04WTAPG50V2.2	
4	C623	2301-000192 C-FILM, PEF;1NF,5%,50V,5.3X10MM		4	C412	2401-000927 C-AL;22UF,20%,250V,GP,13X20MM,	
4	C624	2301-000192 C-FILM, PEF;1NF,5%,50V,5.3X10MM		4	C101	2401-000962 C-AL;22uf,20%,50V,GP,TP,5x11,5	
4	C806	2301-000204 C-FILM, PEF;2.7NF,5%,50V,7.4X3.		4	C615	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	
4	C245	2301-000224 C-FILM, PEF;22NF,5%,50V,7.4X3.9		4	C620	2401-001026 C-AL;3.3UF,20%,50V,GP,5X11MM,5	

Loc. No.	Code No.	Description ; Specification	Remark
4	C804	2401-001192 C-AL;33UF,20%,50V,GP,6X11MM,5MM,TP	
4	C507	2401-001232 C-AL;4.7UF,20%,250V,GP,10X12.5	
4	C409	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C410	2401-001397 C-AL;470UF,20%,25V,GP,10X16MM,	
4	C612	2401-001840 C-AL;100UF,20%,16V,GP,TP,6.3X1	
4	CW05	2401-001840 C-AL;100UF,20%,16V,GP,TP,6.3X1	
4	C633	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11.5	
4	C635	2401-001914 C-AL;1uF,20%,50V,BP,TP,5x11.5	
4	C817	2401-002215 C-AL;2200UF,20%,25V,(105RD)13X	
4	C407	2401-002268 C-ELEC;CE04-40/105250V72R2-MWVR	
4	C825	2401-002300 C-ELECTROLYTIC;CE04WTPAG50V47U	
4	C103	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
4	C813	2401-002594 C-AL;220uF,20%,16V,GP,TP,8x11.5,5	
4	C229	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11.5	
4	C810	2401-002619 C-AL;47uF,20%,25V,GP,TP,5x11.5	
4	C814	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	C815	2401-003028 C-AL;100UF,20%,25V,WT,TP,6.3X1	
4	C631	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2	
4	C819	2401-003139 C-AL;1000UF,20%,25V,WT,TP,10*2	
4	L101	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L205	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L206	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L603	2701-000114 INDUCTOR-AXIAL;10UH,10%,2.5X3.	
4	L707	2701-000127 INDUCTOR-AXIAL;15UH,10%,2.5X3.	
4	L210	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L211	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
△	4	L401 2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L604	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L605	2701-000142 INDUCTOR-AXIAL;1UH,10%,2.5X3.4	
4	L212	2701-000158 INDUCTOR-AXIAL;22UH,10%,2.5X3.	
4	L209	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L803	2701-000159 INDUCTORAXIAL;22uH,10%,4.2x9.8mm	
4	L601	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	
4	L602	2701-000169 INDUCTORAXIAL;3.9uH,10%,2.5x3.4mm	
4	L202	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L203	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L230	2701-000177 INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
4	L204	2702-000142 INDUCTOR-RADIAL;22uH,5%,6x6.4mm	
4	X601	2801-000186 CRYSTAL-UNIT;18.432MHz,25ppm,28-AAM,8pF,	
4	X201	2801-003433 CRYSTAL-UNIT;12MHz,30PPM,28-AAM,30PF,300	
△	4	L403 2901-000297 FILTER-EMI ON BOARD;-3A,-,3.5x5,TP,-	
4	L407	2901-000297 FILTER-EMI ON BOARD;-3A,-,3.5x5,TP,-	
4	L501	2901-000297 FILTER-EMI ON BOARD;-3A,-,3.5x5,TP,-	
4	L805	2901-000297 FILTER-EMI ON BOARD;-3A,-,3.5x5,TP,-	
4	R816	2901-000297 FILTER-EMI ON BOARD;-3A,-,3.5x5,TP,-	
4	Z202	2903-000129 FILTER-CERAMIC;BR,4.5MHz,-,TP,-	
4	J235	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L302	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L303	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L402	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L404	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L801	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L802	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L804	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L806	3301-000287 CORE-FERRITEBEAD;AA,3.5X1.0X6.	
4	L809	3301-001223 CORE-FERRITE BEAD;AB,-,3.5X5X0.8MM,-,TP,-	
△	4	FD802S 3601-001163 FUSE-AXIAL LEAD;125V,7A,-,EPOXY,2.4X7.1M	
△	4	FD801S 3601-001228 FUSE-AXIAL LEAD;125V,10A,FAST-ACTING,EPO	
4	F801A	3602-000114 FUSE-HOLDER;-3,30MOHM	
4	F801B	3602-000114 FUSE-HOLDER;-3,30MOHM	
4	C203	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	C502	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	C503	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J101	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J102	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J103	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J105	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J106	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J107	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J108	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J109	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J110	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J201	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J202	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J203	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J204	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J205	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	

Loc. No.	Code No.	Description ; Specification	Remark
4	J210	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J211	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J212	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J215	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J217	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J219	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J220	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J221	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J222	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J223	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J224	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J225	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J228	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J231	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J232	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J233	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J234	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J236	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J237	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J240	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J249	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J250	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J251	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J252	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J253	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J255	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J256	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J257	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J274	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J279	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J285	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J290	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J292	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J293	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J294	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J295	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J302	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J304	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J305	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J306	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J307	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J308	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J403	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J404	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J405	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J407	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J408	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J409	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J410	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J413	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J414	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J415	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J416	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J420	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J421	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J422	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J423	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J424	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J501	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J502	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J503	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J504	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J505	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J601	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J602	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J603	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J604	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J614	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J615	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J616	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J619	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J620	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J621	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J624	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J625	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J626	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	
4	J627	3812-000219 JUMPER-WIRE-SQ,COPPER;TAQ.6SN/52M/M/A	

Samsung Electronics

Loc. No.	Code No.	Description ; Specification	Remark
4	EL402	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL403	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL404	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL405	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL406	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL407	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL501	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL502	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL805	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL806	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL807	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	EL808	AA60-40011B EYELET; .ID2.2,0D3.2,-,-,BSP	
4	GT102	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT404	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT501	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT502	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT503	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT801	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT802	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT803	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT804	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT805	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT806	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT301	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT302	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT401	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	GT402	AA60-40014A PIN-GT,ASSY;1P,-,-,AUTO	
4	L/LINE	AA68-01544A LABEL;LINE,ALL MDL COMMON	
4	R256	2004-000433 R-METAL;1KOHM,1%,1/8W,AA,TP,1.	
4	C709	2202-000806 C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP	
4	R292	2001-000012 R-CARBON;680Kohm,5%,1/8W,AA,TP,1.8x3.2m	

## ASSY COVER FRONT

1	A/CFRO	AA90-03573F	ASSY COVER FRONT;CL21M6WKX/XAX
2	PCB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPK+CF	6006-001095	SCREW-ASSY YAPT;WP,BH,+,M4,L12,ZPC(YEL)
2	CRT+CF	AA60-10050R	SCREW-ASSYWC,HH,+,M5,L31.5,SWR
2	AV+CF	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)
2	F/C	AA64-02330P	CABINET-FRONT;21M6 K57A NT-AMER,HIPS,HB,
3	KC+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	WR+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
3	SFFC	AA60-00091F	SPACER-FELT;-,FELT,150X10,-,-,BLK,T0.5,-
3	HP	AA61-00711J	HOLDER-PCB;29U1,U2,HIPS FV2,BK502IHB-PRO
3	SPRING	AA61-60003J	SPRING-CS;-,SUS304,0.5,0D6,H
3	CC	AA63-00613A	COVER-CONTROL;DP,21M6,AA63-00540A
3	KP	AA64-02100B	KNOB POWER;25M6,29M6,ABS,HB,G3676,IVN-11
3	KC	AA64-02102B	KNOB CONTROL;25M6,29M6,ABS,HB,G3676,SV10
3	WR	AA64-02103B	WINDOW-RMC,LED;25M6,29M6,ACRYL,HB,CLEAR
3	DP	AA64-02104B	DECORATION-POWER;25M6,29M6,ABS,HB,WHT,SV
3	C/F	AA64-02852C	CABINET-FRONT;DP,21M6,AA64-02330G
3	TAPE	0203-001085	TAPE-DOUBLE FACE;#4929,T0.64,W12,-,BLK
2	L/QMS	AA68-02391A	LABEL-QMS;ART-PAPER(90)G,110x24mm
2	INLAV	AA64-60448W	INLAY AV;S51A,PS SHEET,T0.3,BLK,SILVER E
2	BADGE	AA64-70123A	BADGE-BRAND;AL,SAMSUNG,SILVER,L=50,FLAT,
2	AHS	AA91-00427A	ASSY HOLDER SPK;-,PP80HM/15W,BLK,SEMI-D
2	CWFCR	AA65-00011C	CLAMP-WIRE;ALL MODEL,NYLON 66,V2,NTR,25M
2	CWFCL	AA65-30105A	CLAMP-WIRE,NYLON 66N,VO,NTR,15MM
2	APAVS	AA96-01180A	ASSY PCB P-A/V SIDE;CL21M6WKX,K57A
3	RA01	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	RA02	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AB,
3	CA06	2401-001840	C-AL;100UF,20%,16V,GP,TP,6.3X1
3	CA07	2401-001840	C-AL;100UF,20%,16V,GP,TP,6.3X1
3	JA101	3812-000219	JUMPER-WIRE-SQ,COPPER;TA0.6SN/52M/M(A
3	03VER	AA41-11017D	PCB-A/V SIDE;CT-29U1,FR-1,1L,D,1.6T,245X
3	JE01	3722-000143	JACK-PHONE;1P3.4MM,-,MBA6
3	JA01	3722-001031	JACK-RCA;3P;3.6MM,#18,AU
3	CN06A	AA39-00070A	LEAD CONNECTOR-ASSY;4P,200mm,YBNH250-04,
3	CN01A	AA39-20068E	LEAD CONNECTOR-ASSY;-,YBNH025-08,67096-0
3	CN05A	AA39-20069C	LEAD CONNECTOR-ASSY;5P,YBNH025-05,67096
3	BAND	AA63-10002A	BAND-TIE;-,NYLON66V2,-,-,L100,NTR,-,-
2	APC	AA96-01189A	ASSY PCB P-CONTROL,CL21M6WKX,K57A
3	DZY01	0403-000508	DIODE-ZENER;MTZJ5.6B,5.6V,5.45-5.73V,500
3	RY03	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,

Loc. No.	Code No.	Description ; Specification	Remark
3	RY06	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,
3	RY02	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
3	RY05	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP
3	RY01	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP
3	RY04	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP
3	RY07	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1
3	RY08	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm
3	JY01	3812-000219	JUMPER-WIRE-SQ,COPPER;TA0.6SN/52M/M(A
3	00VER	AA41-00709A	PCB-QUEST CONTROL;TXM2792FX,FR-1,1L,A,1.
3	SW07	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY02	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY03	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY04	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY05	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	SWY06	3404-000176	SWITCH-TACT;12V,50MA,90-150GF,
3	CY01	2401-001840	C-AL;100UF,20%,16V,GP,TP,6.3X1
3	LDY02	0601-000465	LED;ROUND,GRN,5mm,565
3	RMV01	AA32-00012A	MODULE REMOCON;ORC-50HF2,38KHZ,940NM,MES
3	CNY01	AA39-00100C	LEAD CONNECTOR-ASSY;4P,YBNH250-04,35155
3	CNY02	AA39-20005A	LEAD-CONNECTOR,ASSY;-,YBNH025-03,67096-0
3	BAND	AA63-10002A	BAND-TIE;-,NYLON66V2,-,-,L100,NTR,-,-
2	L/SPK	AA65-30018A	CLAMP-WIRE;-,NYLON6.6,-,-,DATL
2	INLCFC	AA64-02089A	INLAY-BACK,PS,SHEET,T0.3,BLK,40X40

## ASSY COVER REAR

1	A/CREA	AA90-04490A	ASSY COVER REAR;CL21M6WKX/RCL,K57A
2	CB+CF	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	CB+RCA	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR
2	SPCBC	AA60-00091J	SPACER-FELT;-,FELT,330X10,-,-,BLK,T0.5,-
2	C/B	AA64-02841A	CABINET BACK;DP,21M6,HB,AA64-02331B
2	AC+BC	AA65-30008A	CLAMP-CORD;-,PE,HB,BLK,-,-
2	INB	AA64-00892F	INLAY BACK;D2,D3,RCA9P+DVD,PS SHEET,T0.3
2	HT	AA61-00356B	HOLDER-TUNER,F/JACK;-,501F,ABS,HB,BLK,-
2	L/RAT	AA68-01547A	LABEL RATING;TETRONEPAPER90(S)B,LATIN
2	FBT	AA65-30018A	CLAMP-WIRE;-,NYLON6.6,-,-,DATL
2	YUGO	AA65-30018A	CLAMP-WIRE;-,NYLON6.6,-,-,DATL
2	DRESA/	AA65-30018A	CLAMP-WIRE;-,NYLON6.6,-,-,DATL
2	L/WARR	AA68-01581A	LABEL;WARRANTY, RCL,GRAY,D42MM

## ASSY BOX

1	A/BOX	AA92-07400A	ASSY BOX;CL21M6WKX/RCL;K57A
2	L/BOX	AA68-01542A	LABEL;(UNIBOX),PAPER WHT ALLMD
2	PCK	AA69-01588L	PACKING CASE;21M6 K57A NT-AMER,D-2 BB,A1

## ASSY P/MATERIAL

1	A/PMAT	AA92-03716E	ASSY P/MATERIAL;21M6
2	BXTAPE	0203-001295	TAPE-OPP MASKING;1242,T0.06,W100,L91.4M,
2	STAPLE	AA60-40006A	PIN-STAPLE;-,H18,33X17.8X2
2	C/SET	AA69-01479A	CUSHION-SET;21M6,PS FOAMED,C=0.02
2	PE-BAG	AA69-01209A	BAG;SHEET,25-27,W54,L60,FOAM,OEM.

## ASSY CPT

1	A/CPT	AA91-05837A	ASSY CPT;A51QDX992X,21,+0MG,BARE,SDI FL
2	TAPE	0203-001303	TAPE-ACETATE;#1554,T0.25,W19,L30000,WHT
2	CRT	AA03-00317A	CRT COLOR;A51QDX992X,0MG,1.85MH,18.0MH,2
2	C-Y	AA27-00002A	MAGNET-CONVERGENCE;JH291-SC-0B,29.1M
2	D-COIL	AA27-00256A	COIL DEGAUSSING;21IHCH,10%,35TS,4.5OHM,
2	D-Y	AA27-00198A	DEFLECTION YOKE;21DIF,2192AA(NF),ST-3
2	SPACER	AA63-60028A	SPACER-DY;-,NEOPRENE,-,BLK,V0W
2	CDCOIL	AA65-00009B	CLAMP-D,COIL;NYLON 66,VO,-,-,21A8,-
2	A/TBC	AA98-70014D	ASSY-TBC,WIRE(P);-,22 Q,NTSC,PAL,1P,TVI
2	S/GUM	AA63-60004P	SPACER-GUM,CRT;-,NTR RUBBER,-,-,GRY,T2


Loc. No.	Code No.	Description ; Specification	Remark	Loc. No.	Code No.	Description ; Specification	Remark
----------	----------	-----------------------------	--------	----------	----------	-----------------------------	--------

### ASSY ACCESSORY

1	A/ACCS	AA92-07401A	ASSY ACCESSORY;CL21M6WKX/RCL;K57A
2	AC-TAP	0203-001279	TAPE-OPP MASKING;#232,T0.14,W15,L50000,Y
2	RMT	AA59-00141F	REMOCON;TM58,SSM174PT,41,SS,L/GRAY,MBR,
2	I/B	AA68-02619A	MANUAL USERS;B5,SPA,W/P100(G),K57A
2	PLUG	3721-000136	PLUG-CONVERSION;15A300VPI4.0CP
2	C/POIN	AA68-02408A	CARD-POINTS,BLUE,RCL,TANTUS/PROYECCION
2	C/REG	AA68-02409A	CARD-REGISTRATION,WHITE,RCL,TANTUS/PROYE
2	BAG-PE	AA69-01195A	BAG PE;CL29A6W8X,HDPET0.012,93/4X151


8. Block Diagram

8-1 K57A

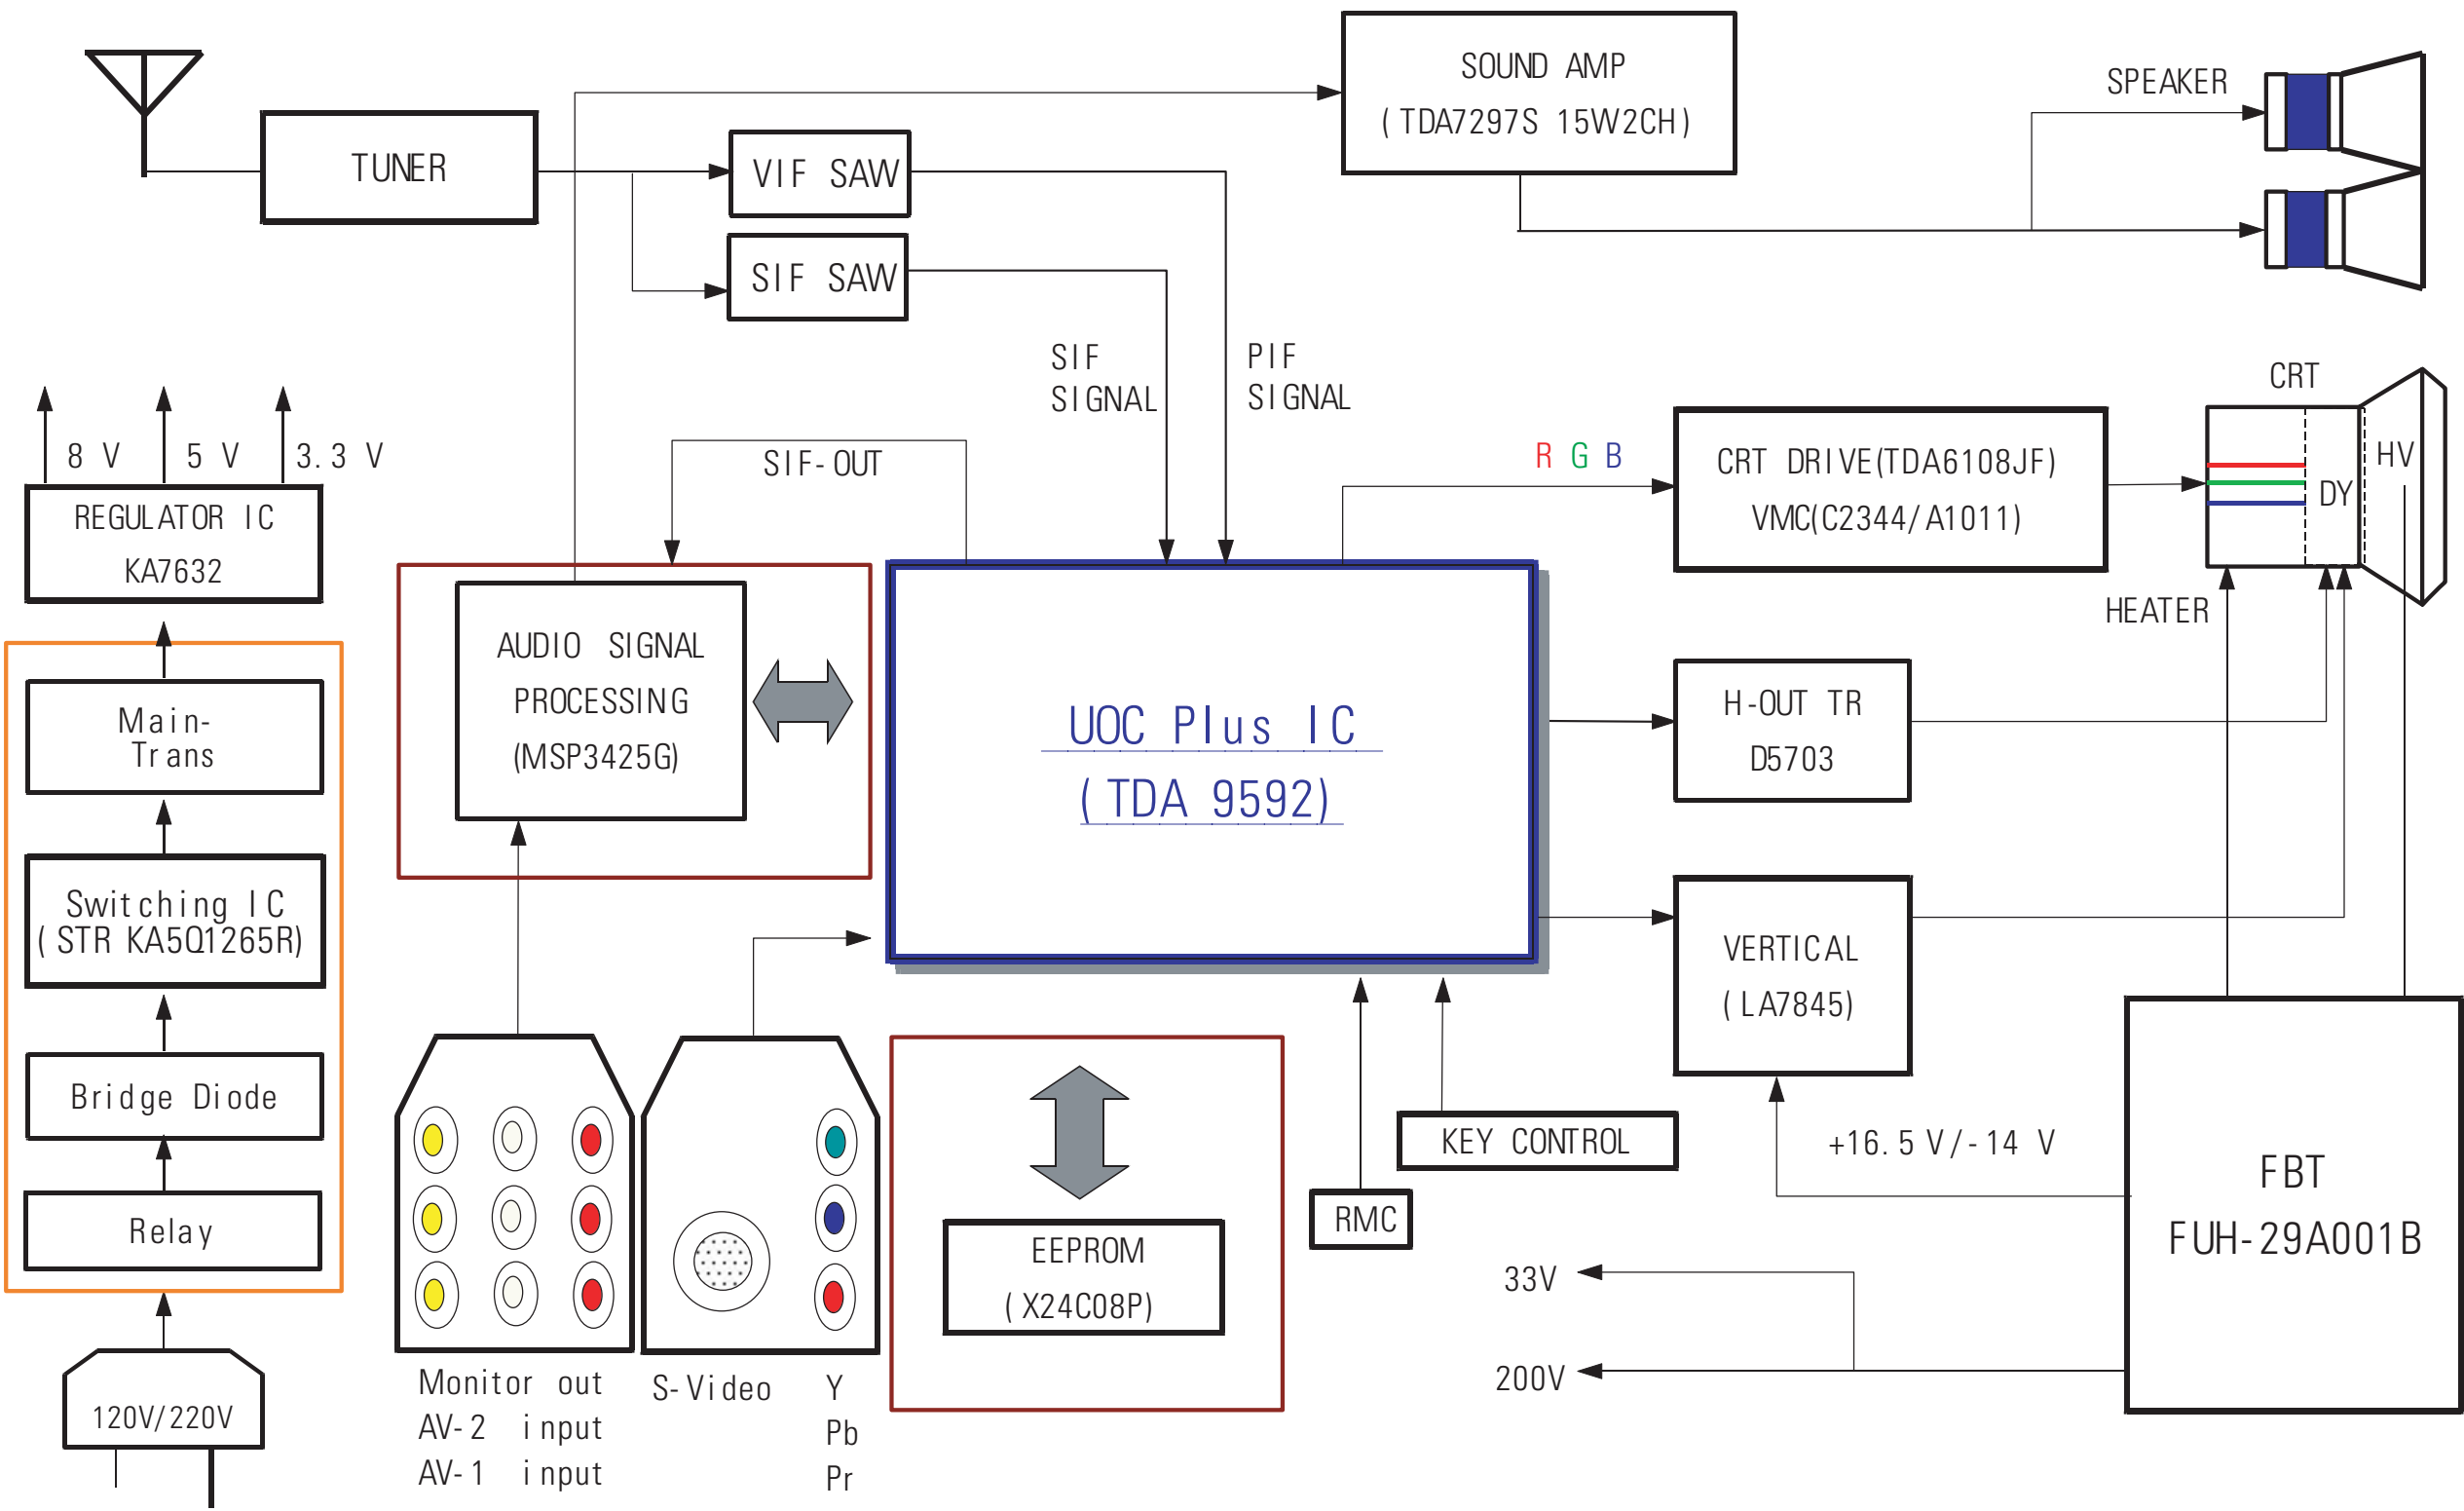

9. Wiring Diagram

9-1 K57A

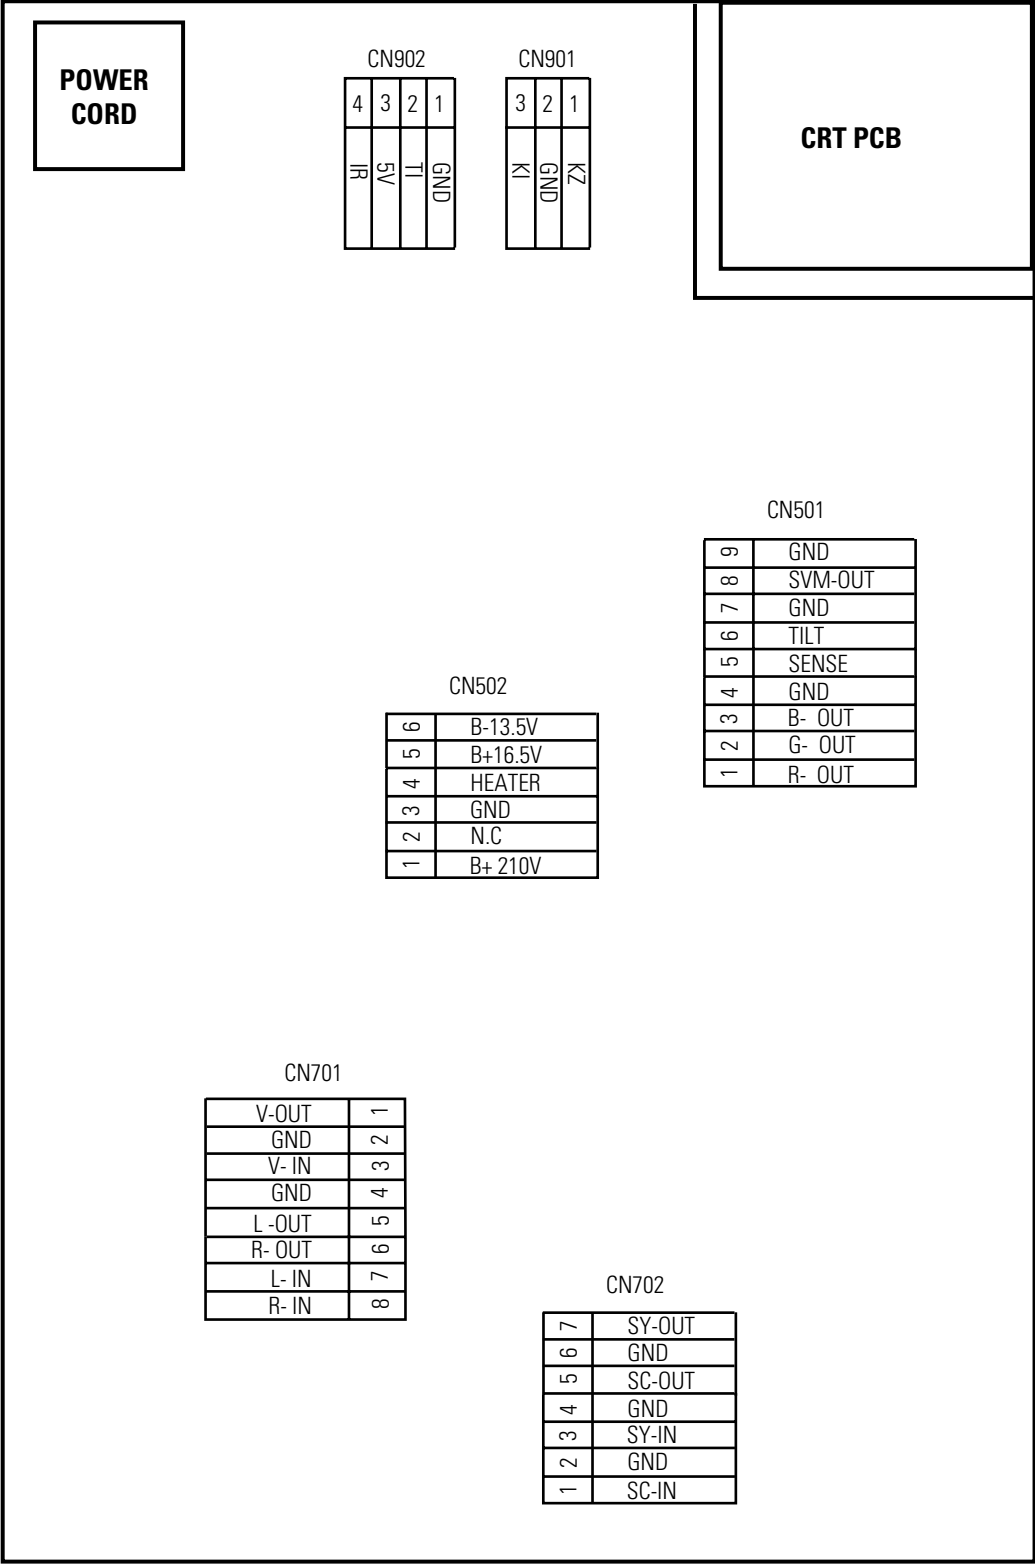






# MEMO

## 10. Schematic Diagrams

**10-1 MAIN(1/3)**

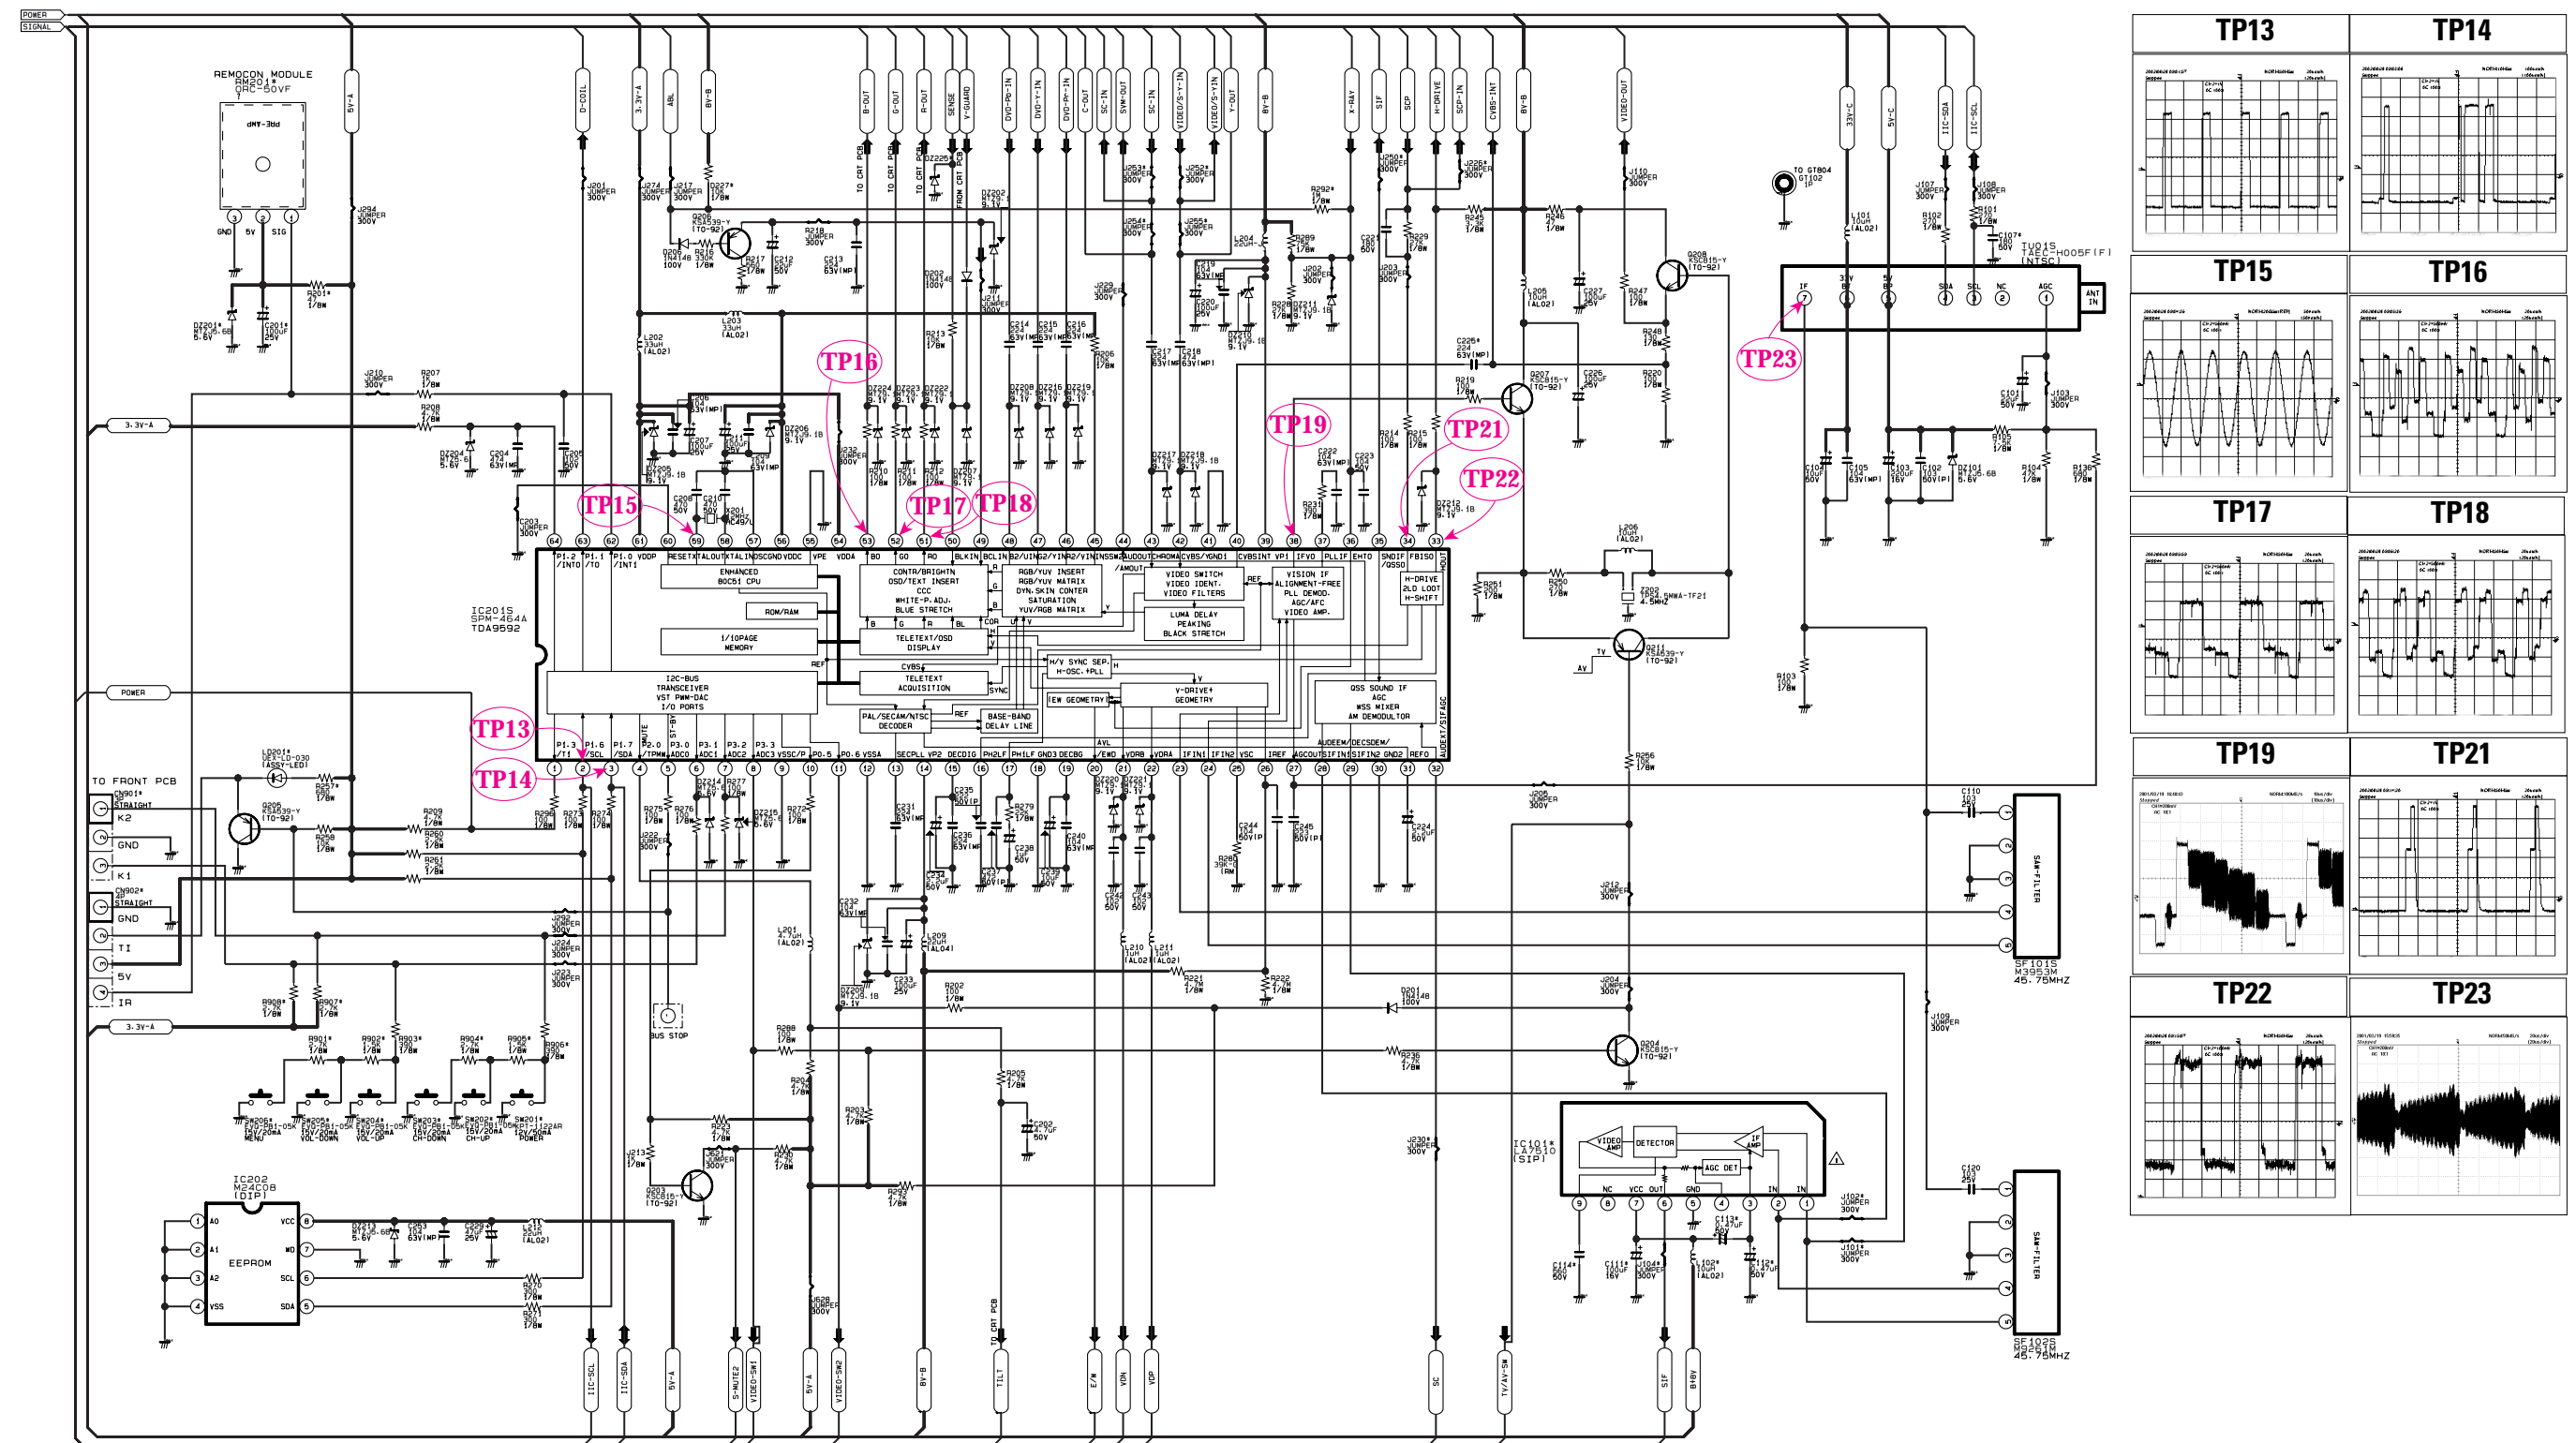

10-2 MAIN(2/3)

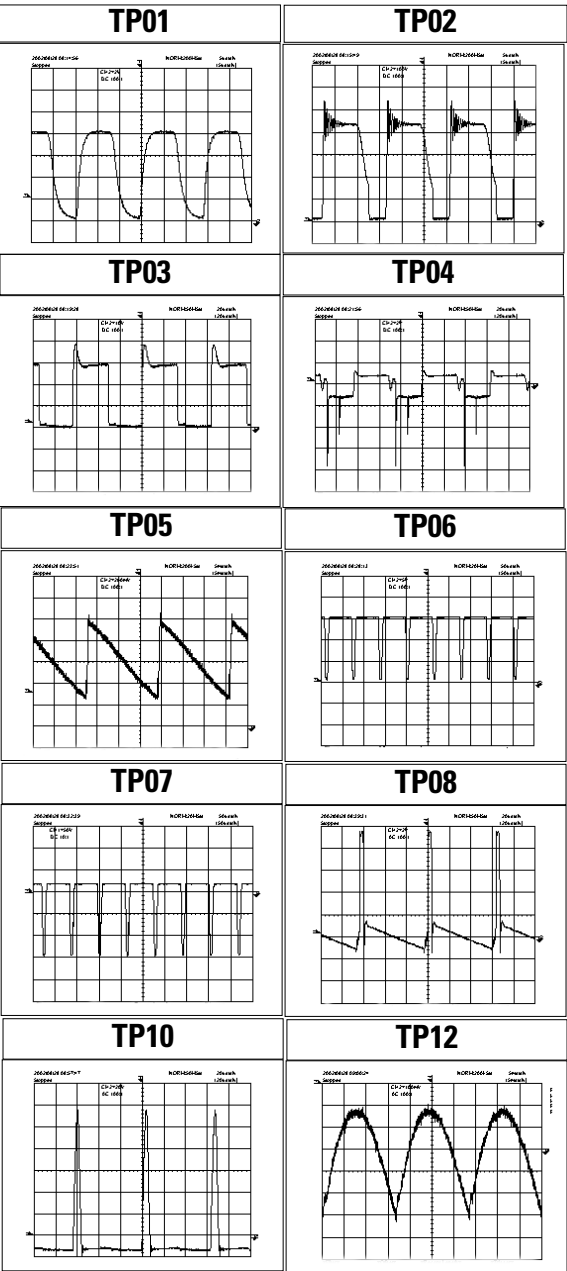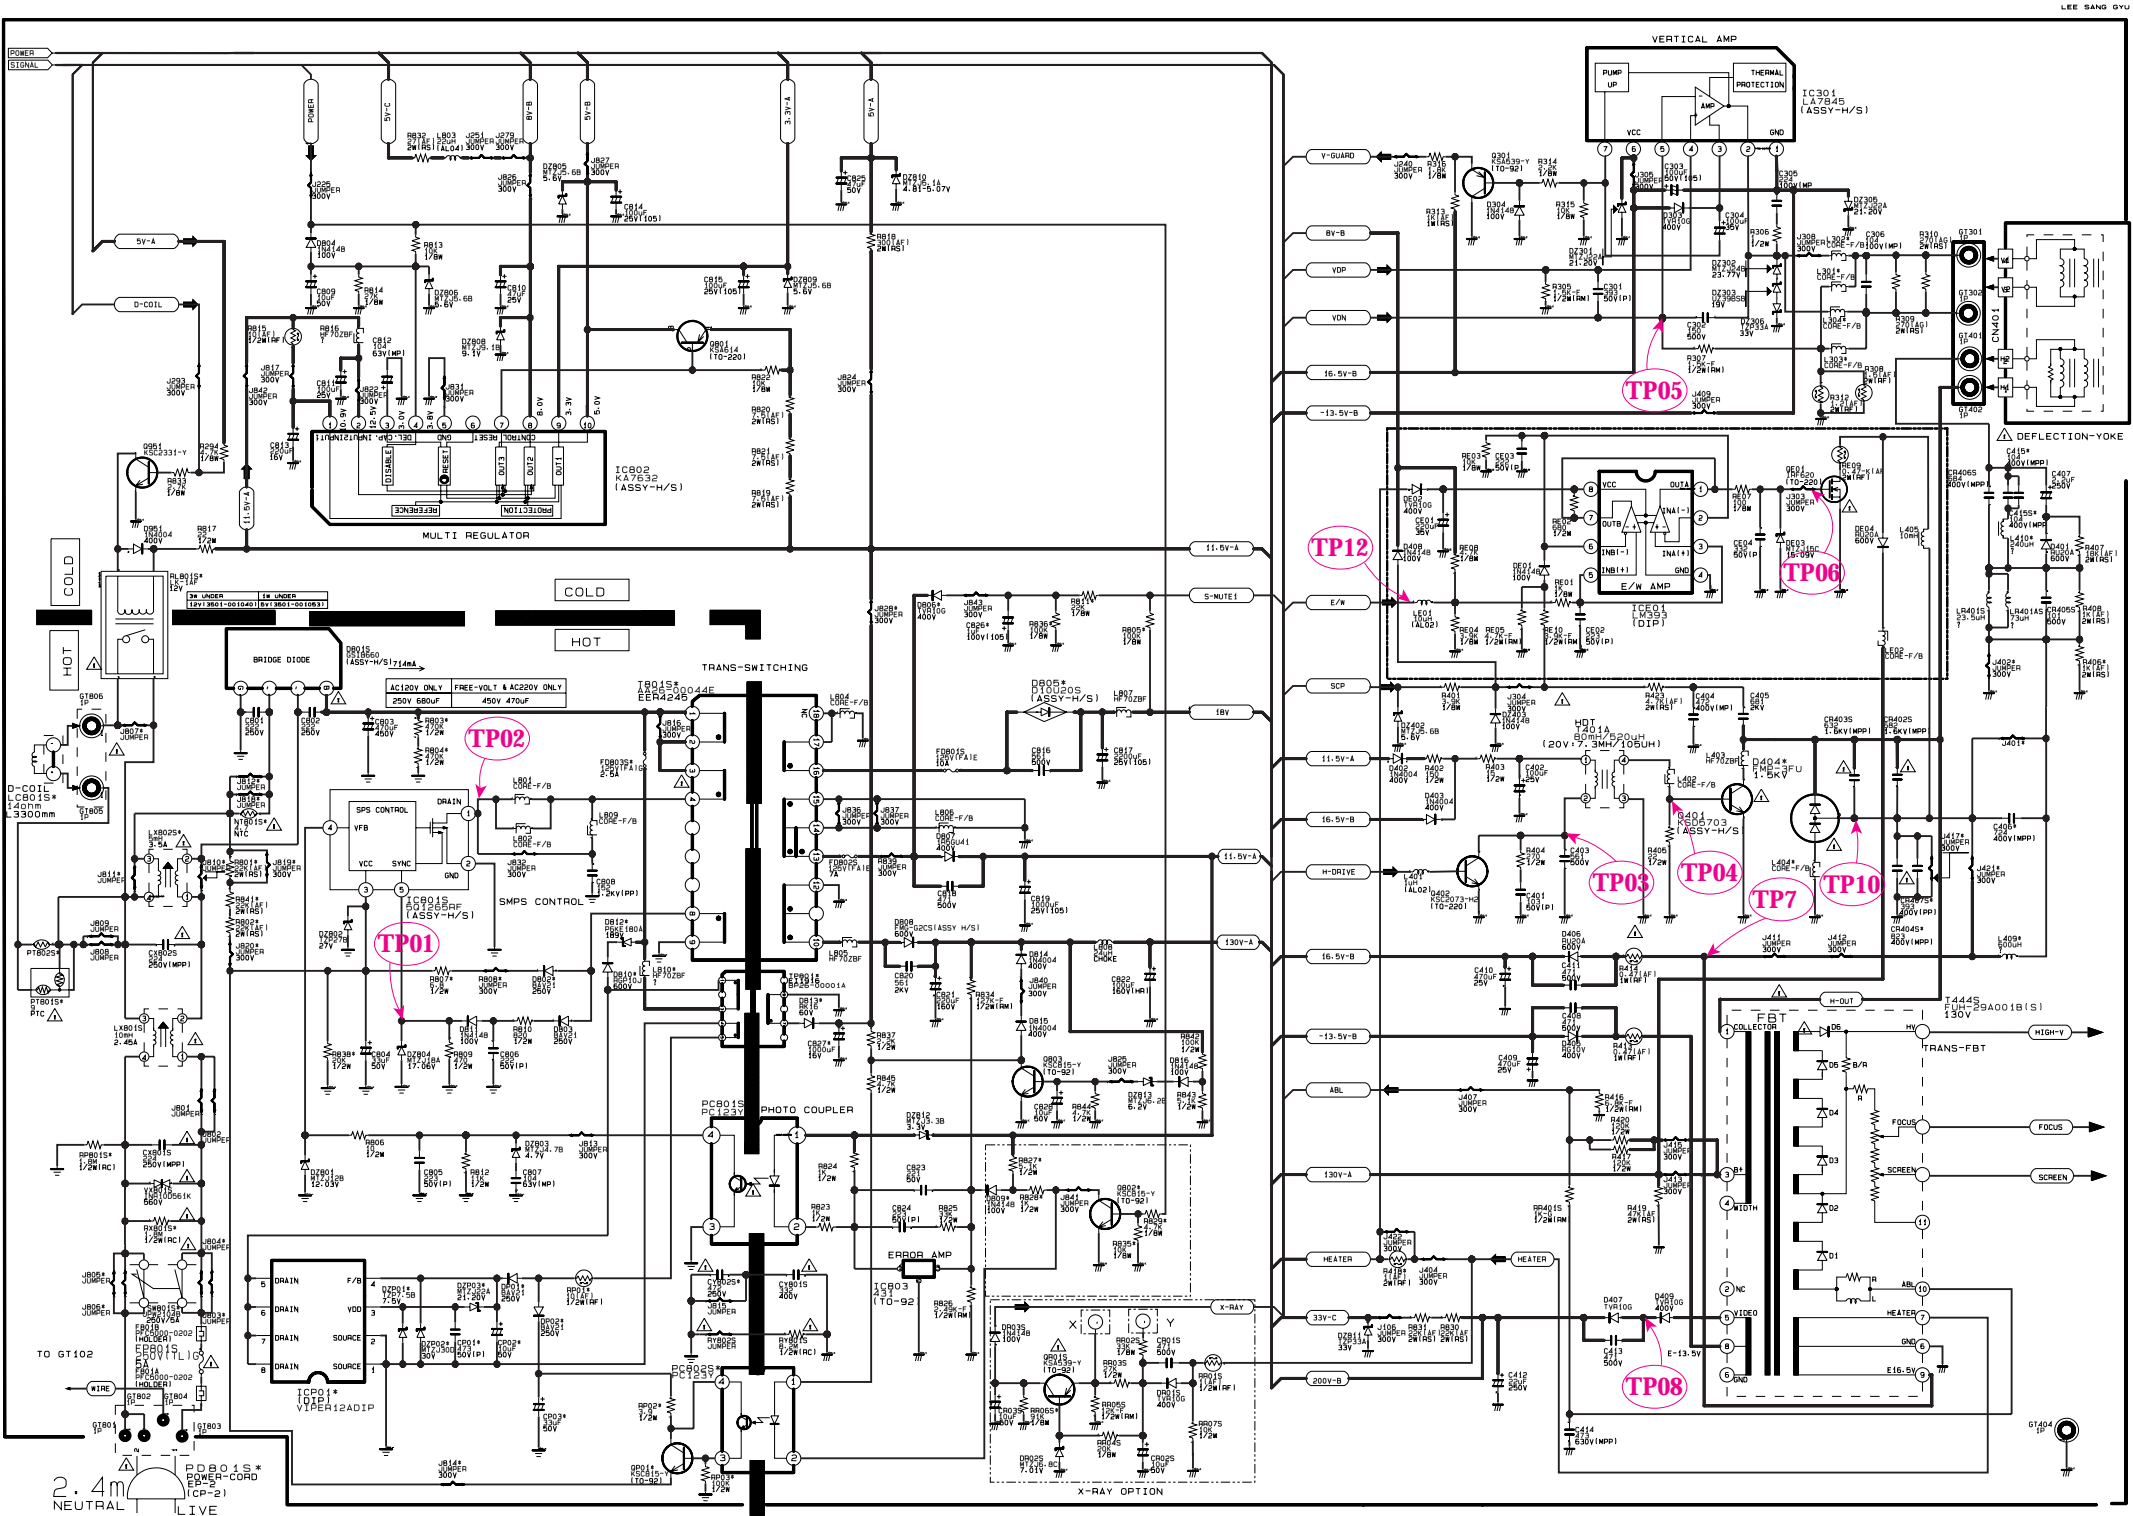

## 10-3 MAIN(3/3)

